Program Complot
(Version 2021-1)
by
Dermott E. Cullen
(Present Contact Information)
Dermott E. Cullen
1466 Hudson Way
Livermore, CA 94550
U.S.A.
Tele: 925-443-1911
E.Mail:redcullen1@comcast.net
Web:redcullen1.net/HOMEPAGE.NEW

Press Mouse Button to Start

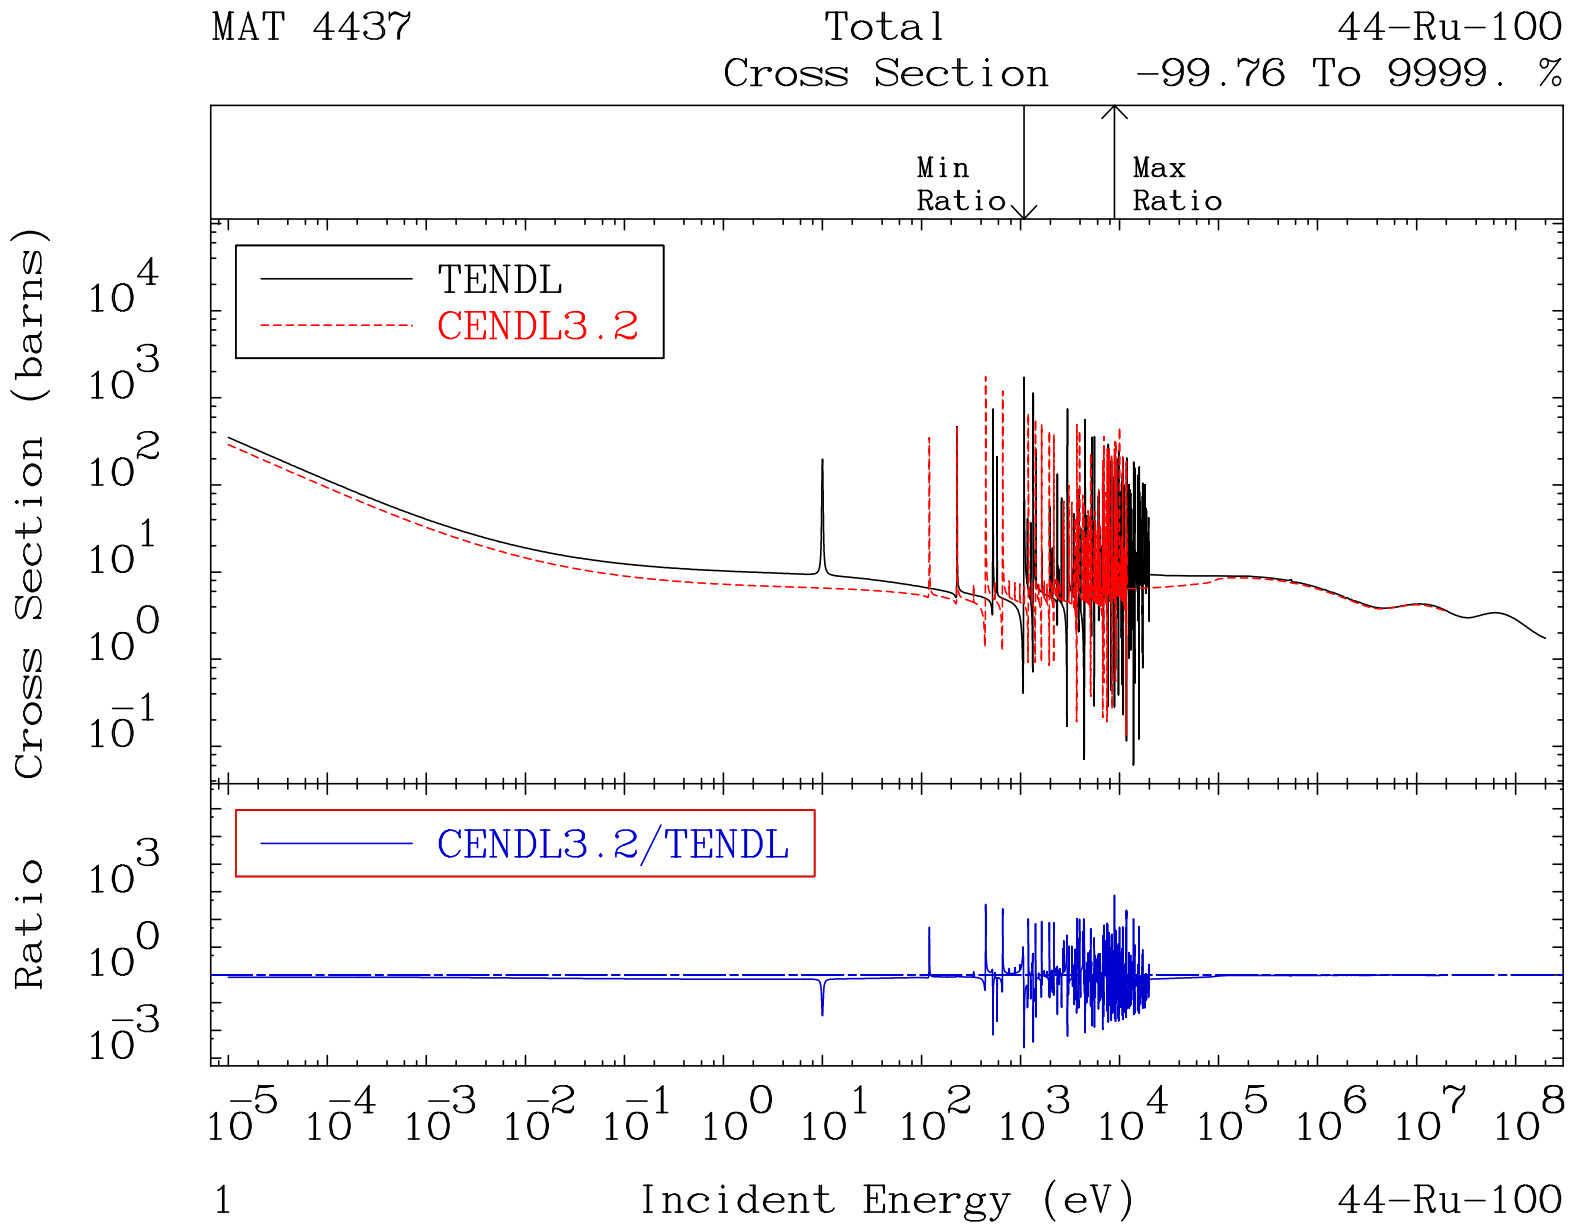
MAT 4437
Total
Cross Section
44-Ru-100
-99.76 To 9999. %
Min
Ratio
Max
Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
1
44-Ru-100

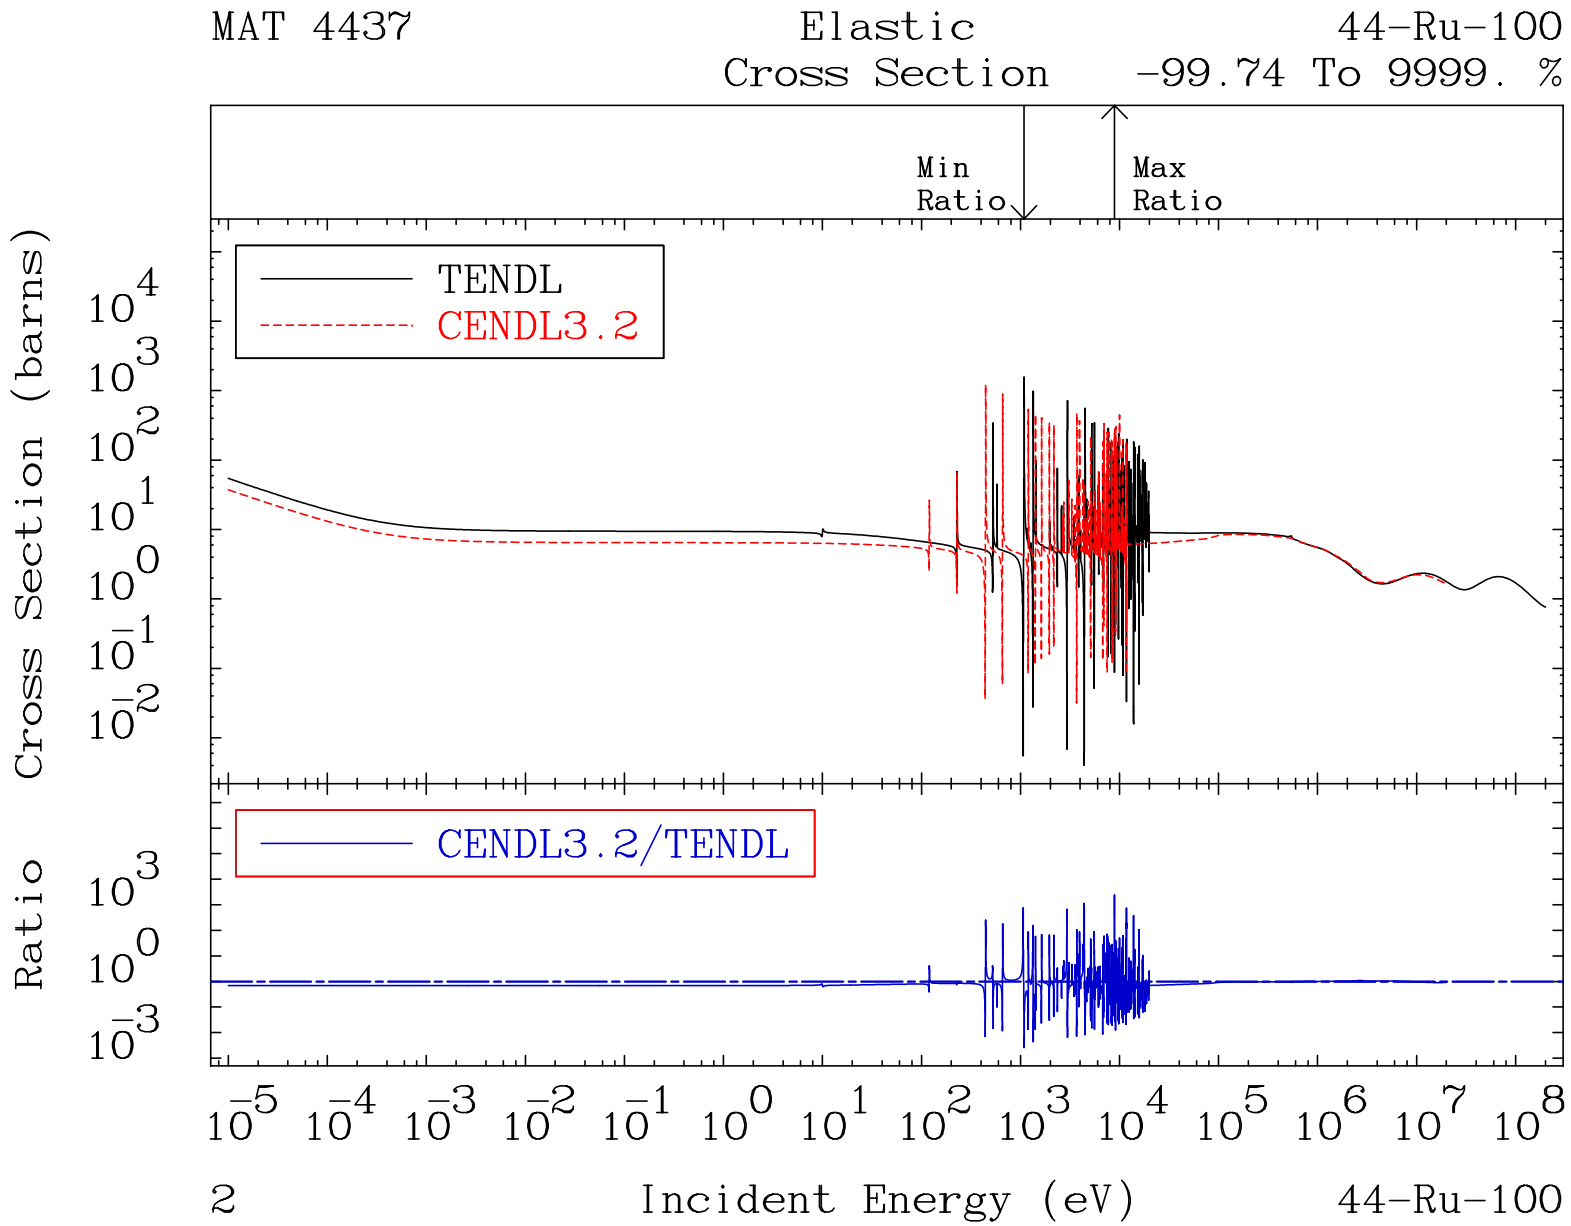
MAT 4437
Elastic
Cross Section
44-Ru-100
-99.74 To 9999. %
Min Ratio
Max Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
2
44-Ru-100

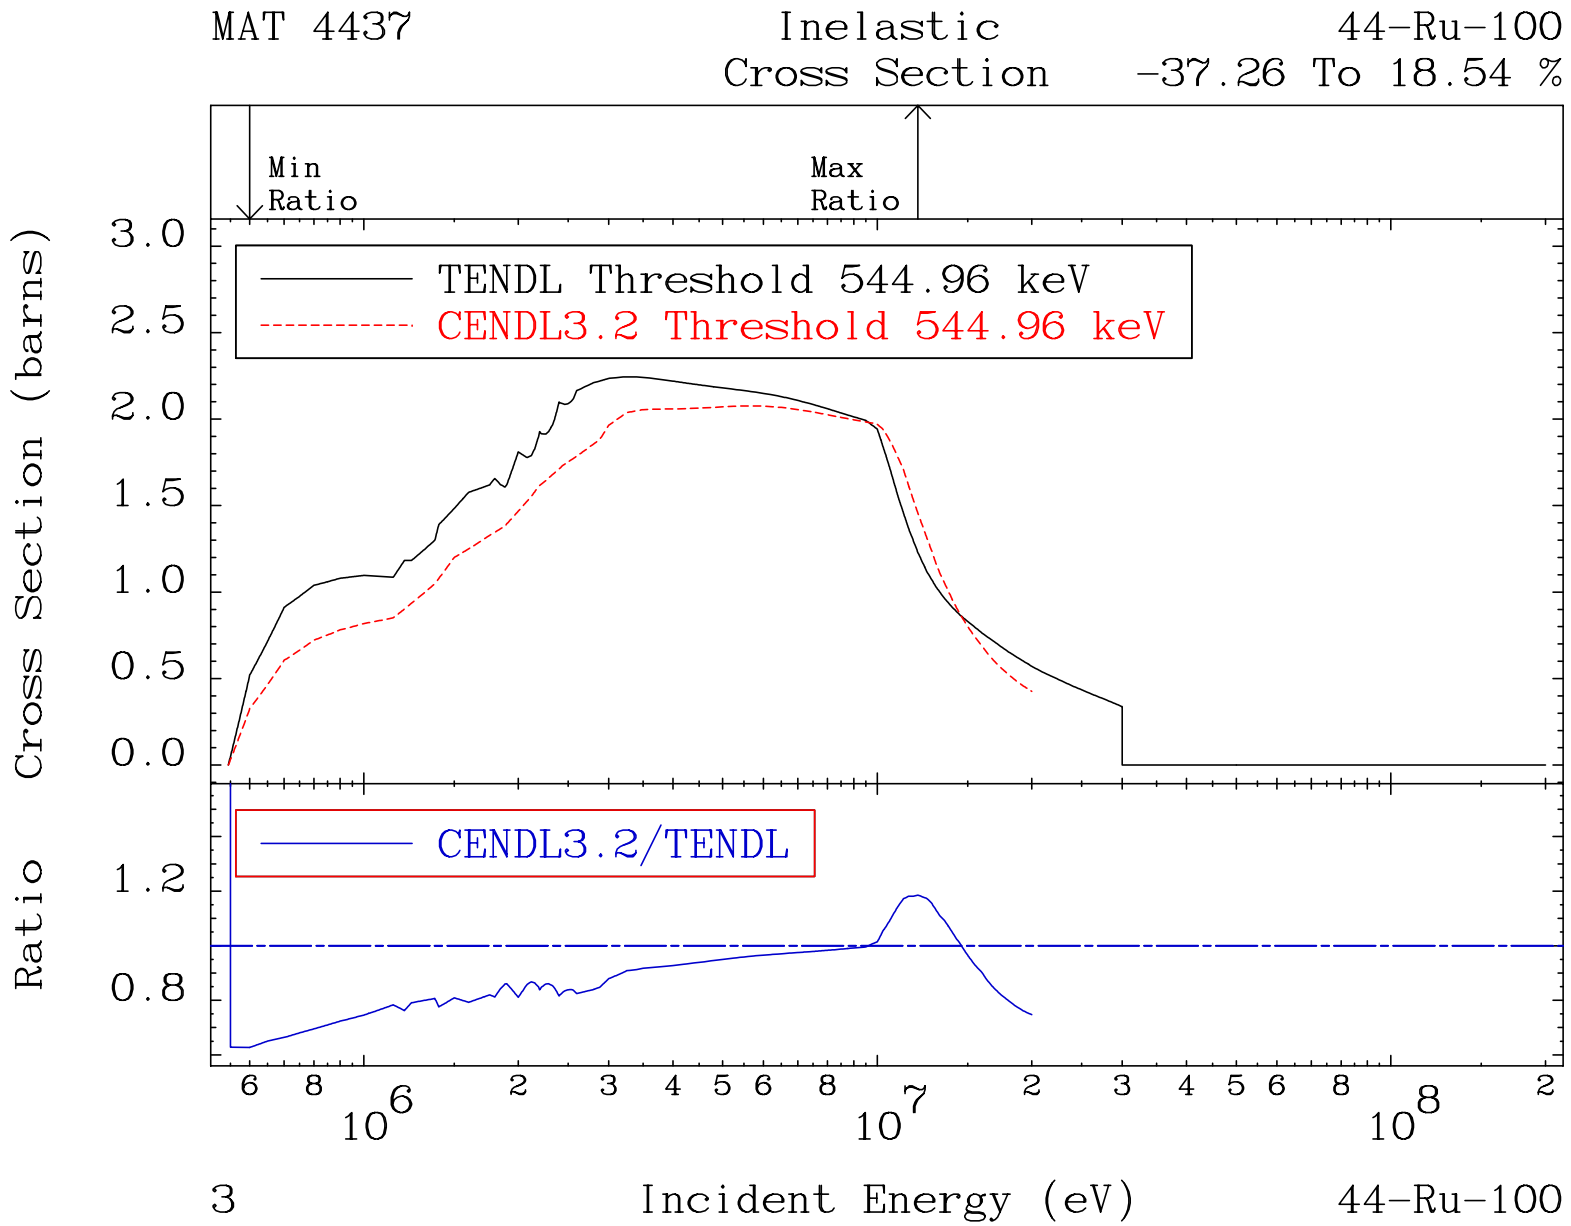
MAT 4437
Inelastic
Cross Section
44-Ru-100
-37.26 To 18.54 %
Min
Ratio
Max
Ratio
TENDL Threshold 544.96 keV
CENDL3.2 Threshold 544.96 keV
Cross Section (barns)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
CENDL3.2/TENDL
Ratio
1.2
0.8
6 8 10^6 2 3 4 5 6 8 10^7 2 3 4 5 6 8 10^8 2
3
Incident Energy (eV)
44-Ru-100

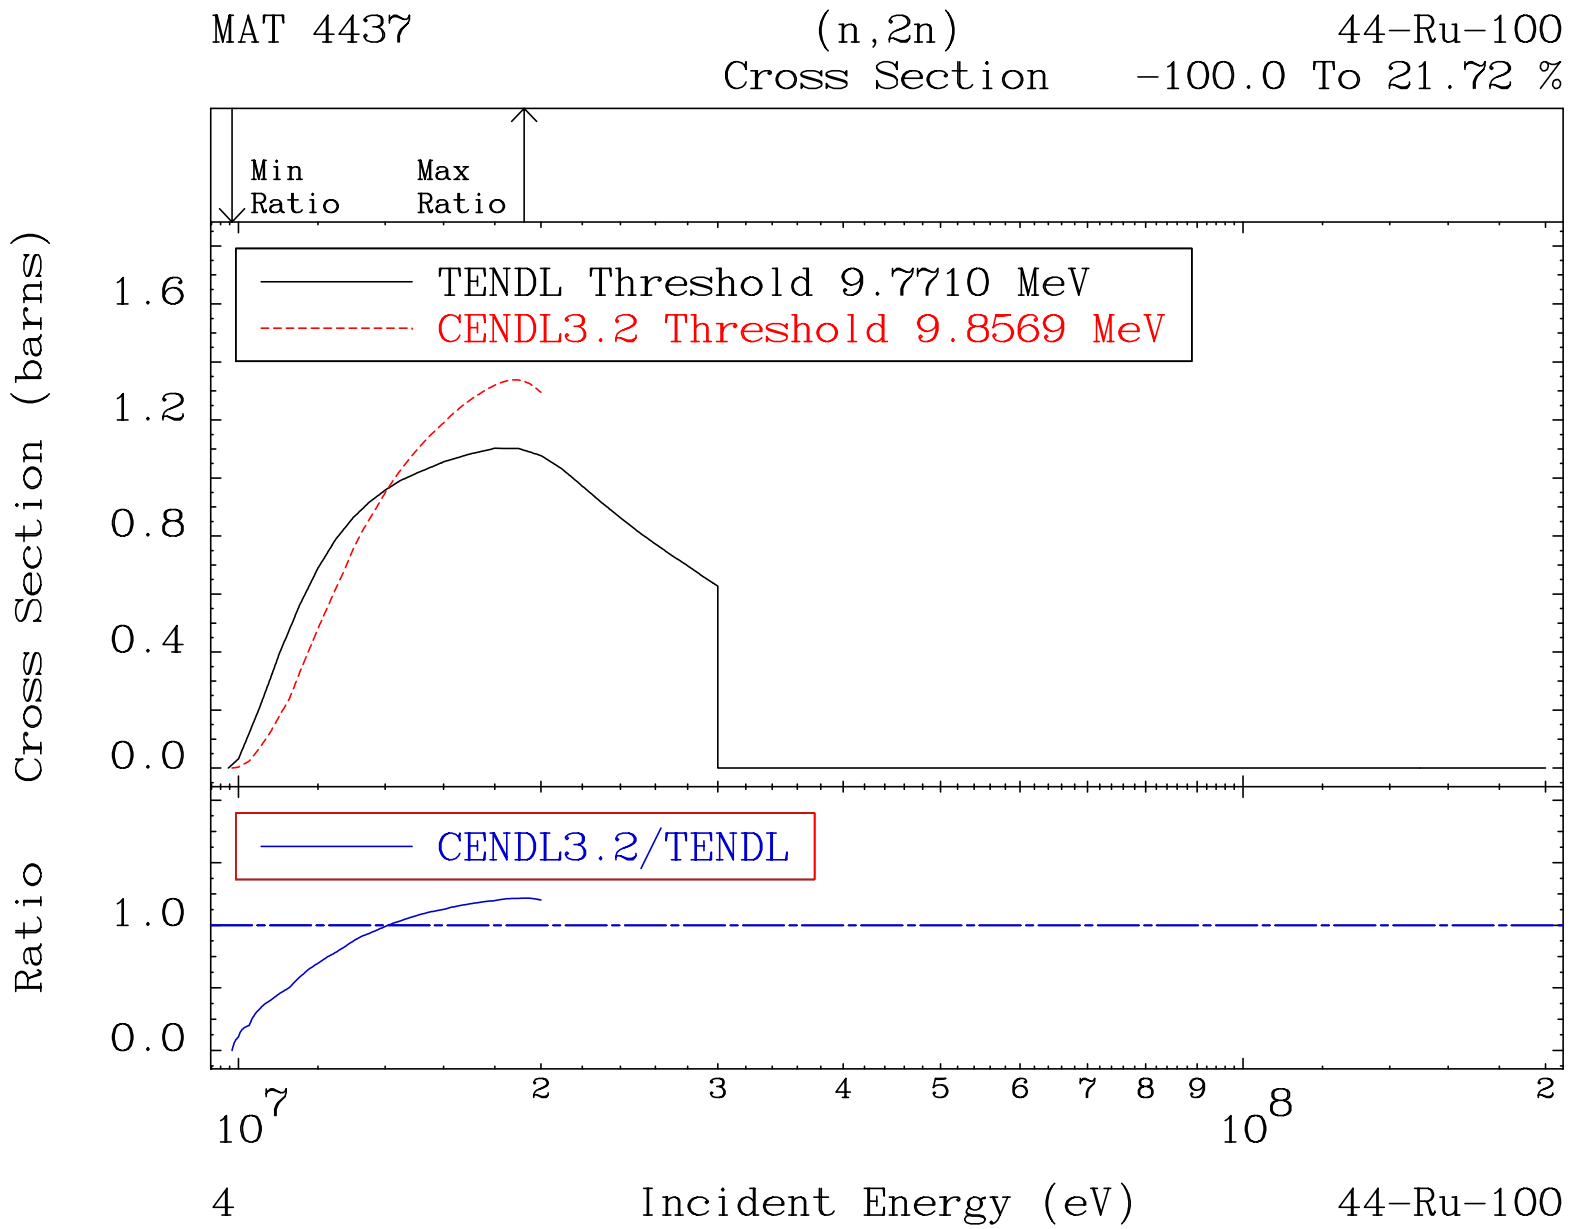
MAT 4437
(n,2n)
Cross Section
44-Ru-100
-100.0 To 21.72 %
Min Ratio
Max Ratio
TENDL Threshold 9.7710 MeV
CENDL3.2 Threshold 9.8569 MeV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
1.6
1.2
0.8
0.4
0.0
1.0
0.0
10^7
2
3
4
5
6
7
8
9
10^8
2
4
Incident Energy (eV)
44-Ru-100

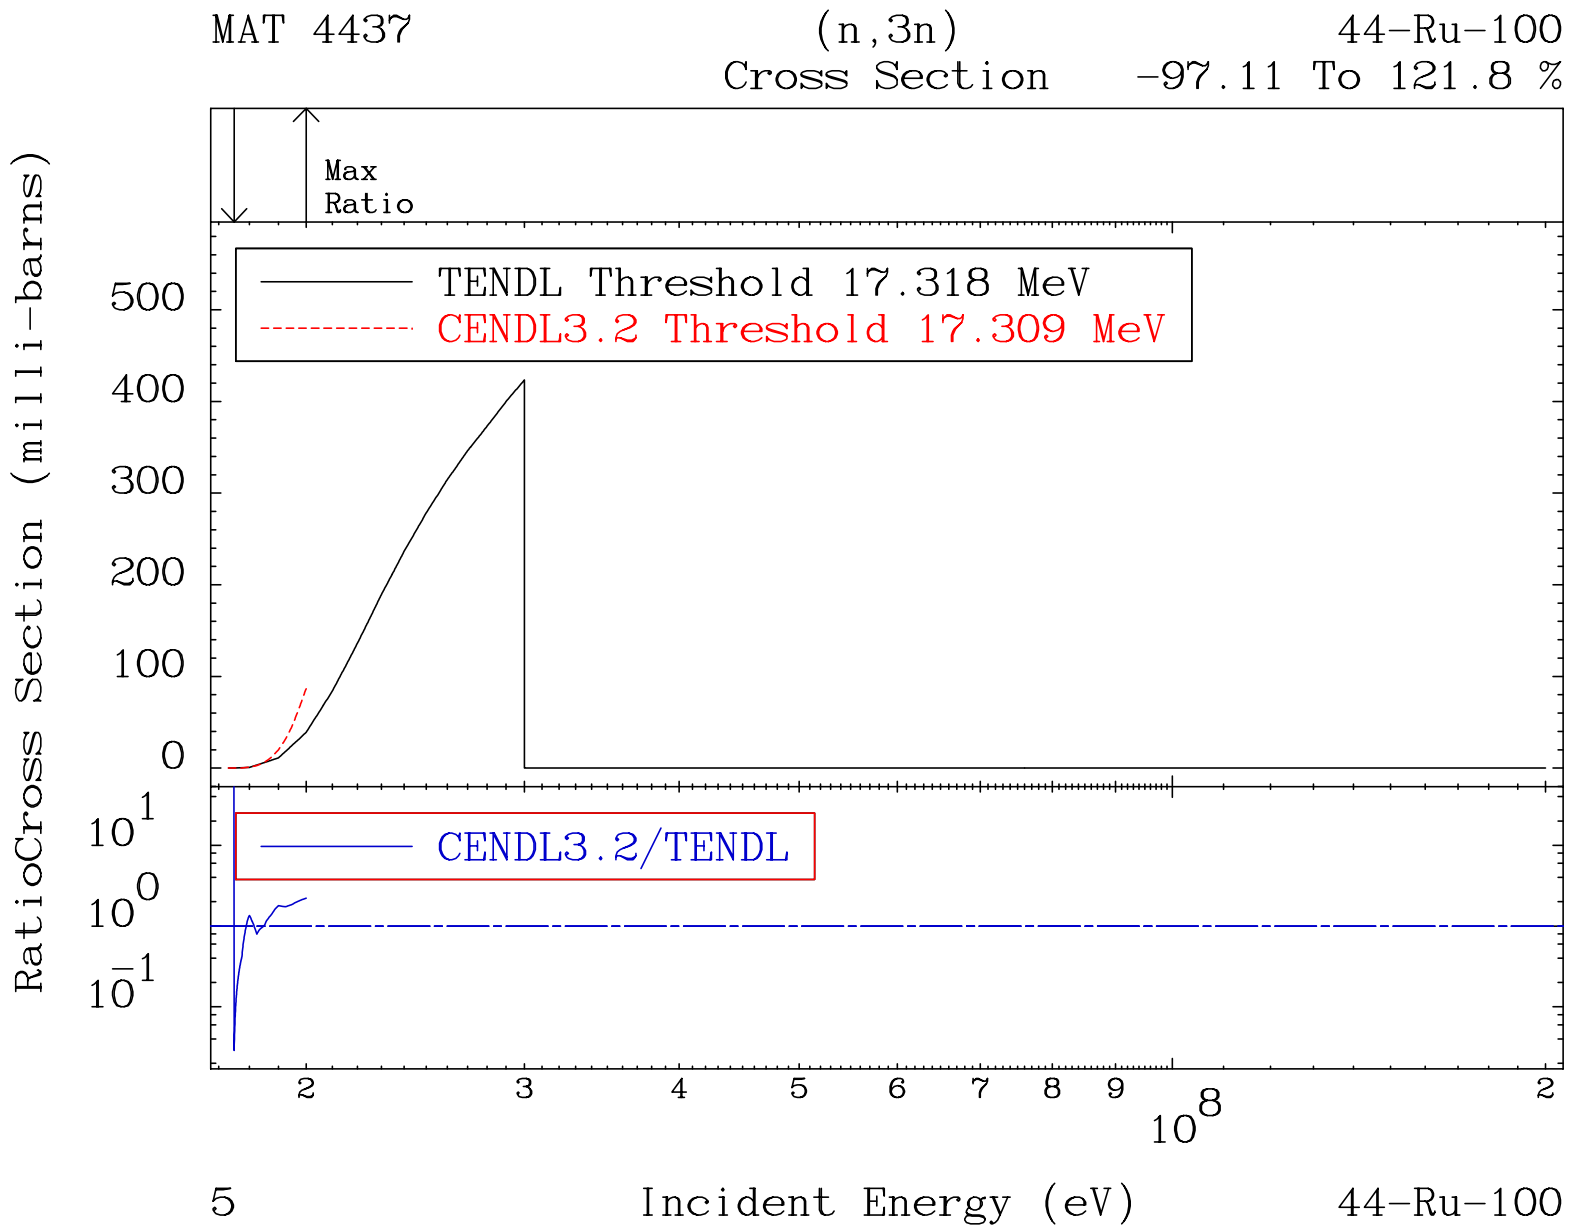
MAT 4437
(n,3n)
Cross Section
44-Ru-100
-97.11 To 121.8 %
Max
Ratio
TENDL Threshold 17.318 MeV
CENDL3.2 Threshold 17.309 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
500
400
300
200
100
0
10^1
10^0
10^-1
2
3
4
5
6
7
8
9
10^8
2
Incident Energy (eV)
5
44-Ru-100

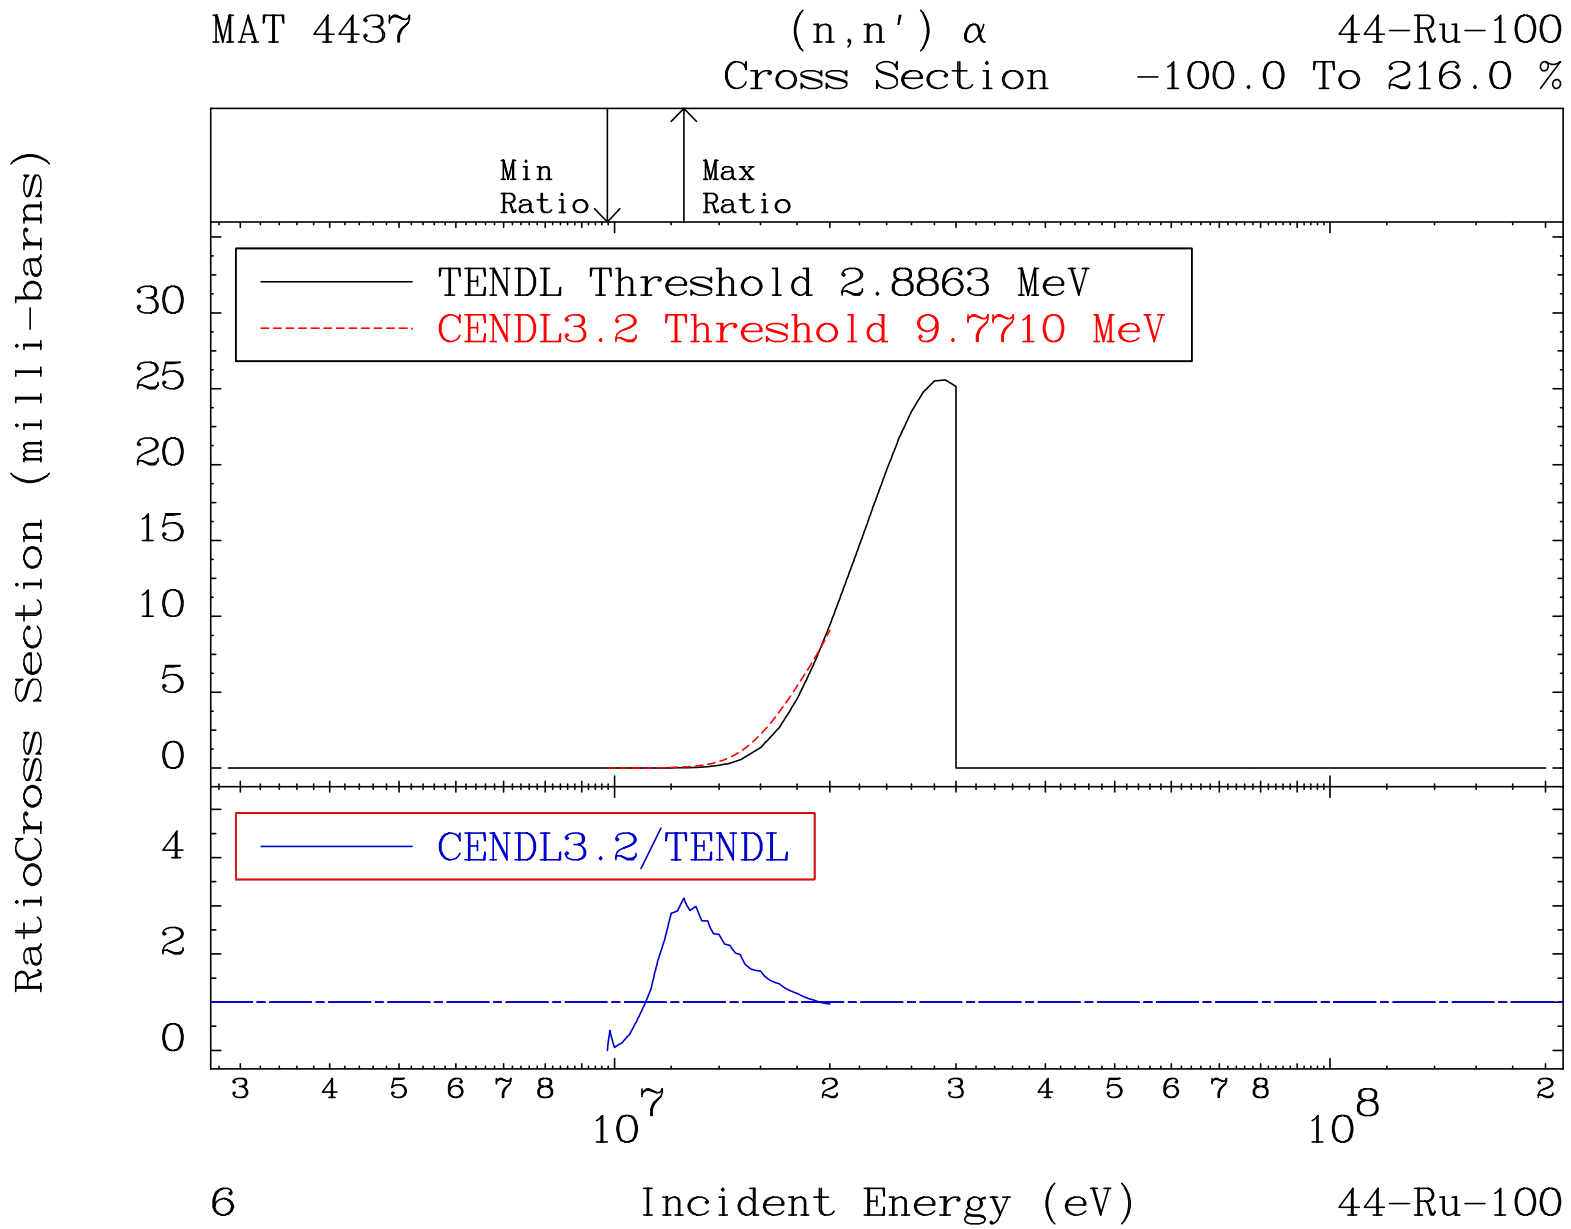
MAT 4437
(n,n') α
Cross Section
44-Ru-100
-100.0 To 216.0 %
Min Ratio
Max Ratio
TENDL Threshold 2.8863 MeV
CENDL3.2 Threshold 9.7710 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
30
25
20
15
10
5
0
4
2
0
3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
6
Incident Energy (eV)
44-Ru-100

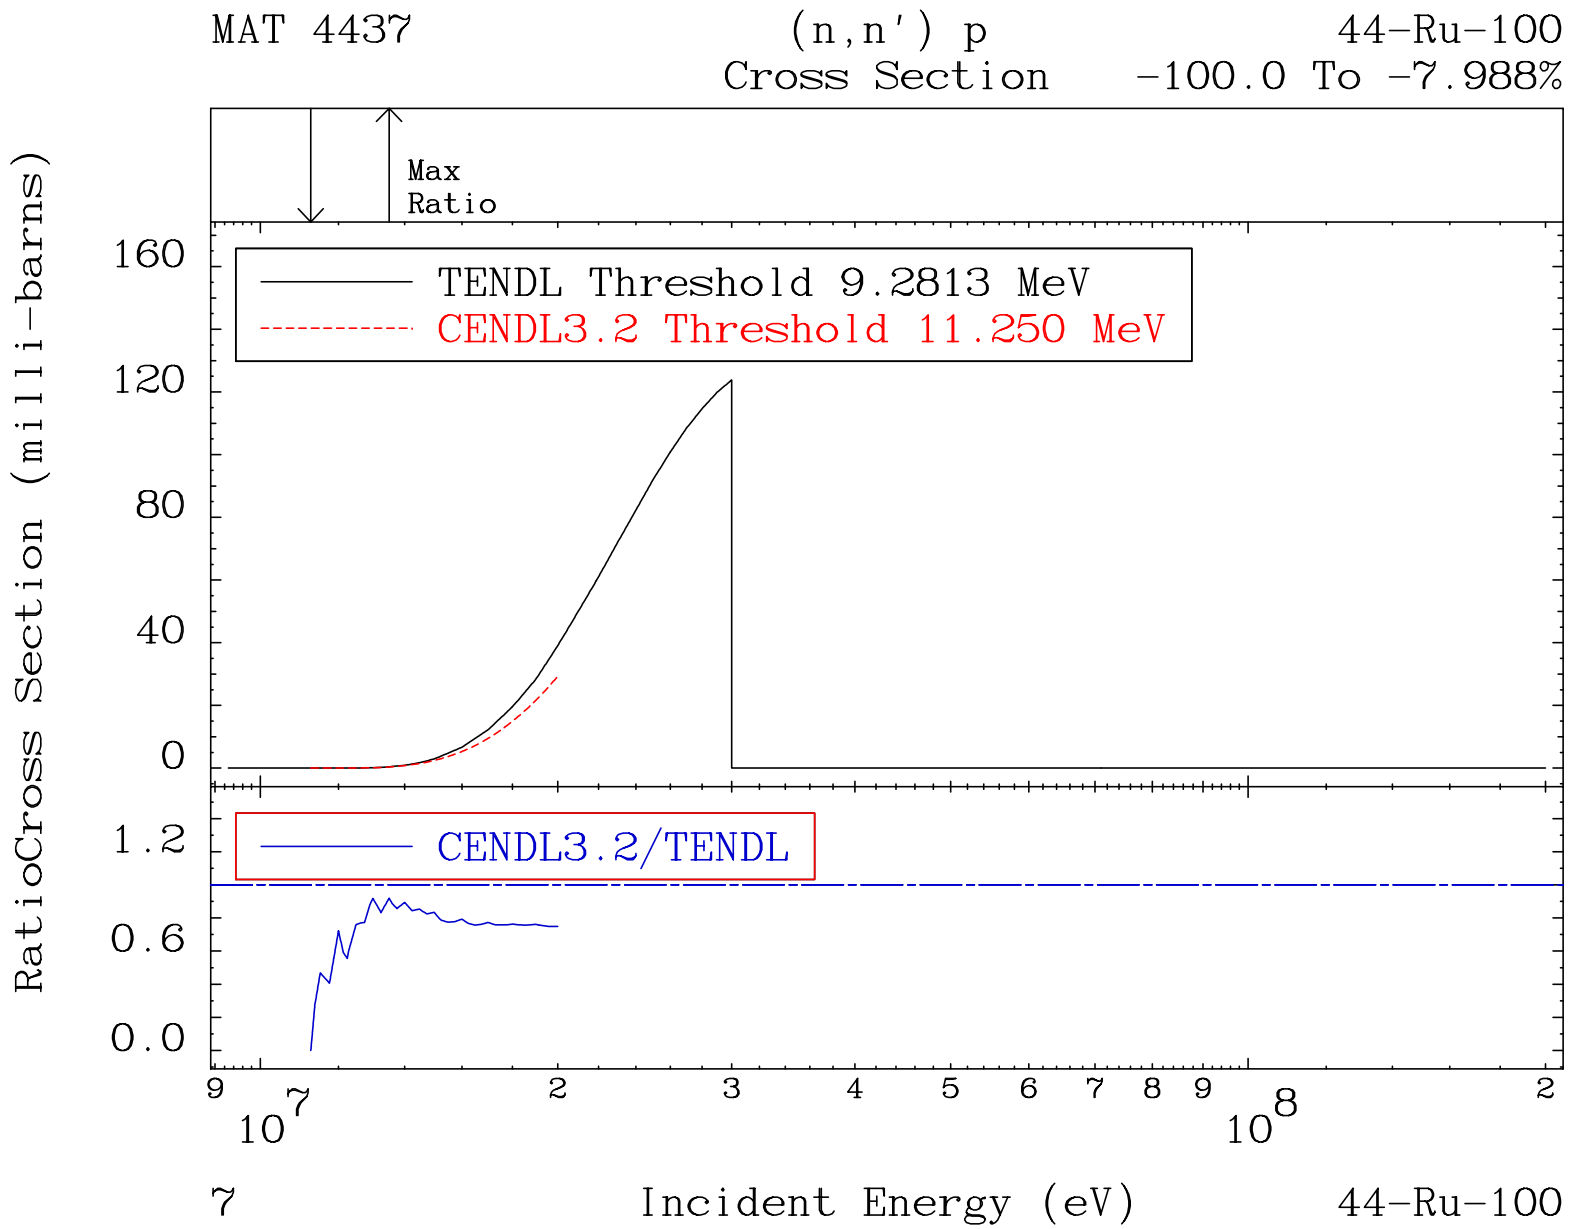
MAT 4437
(n,n') p
Cross Section
44-Ru-100
-100.0 To -7.988%
Max
Ratio
TENDL Threshold 9.2813 MeV
CENDL3.2 Threshold 11.250 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
160
120
80
40
0
1.2
0.6
0.0
9
10^7
2
3
4
5
6
7
8
9
10^8
2
7
Incident Energy (eV)
44-Ru-100

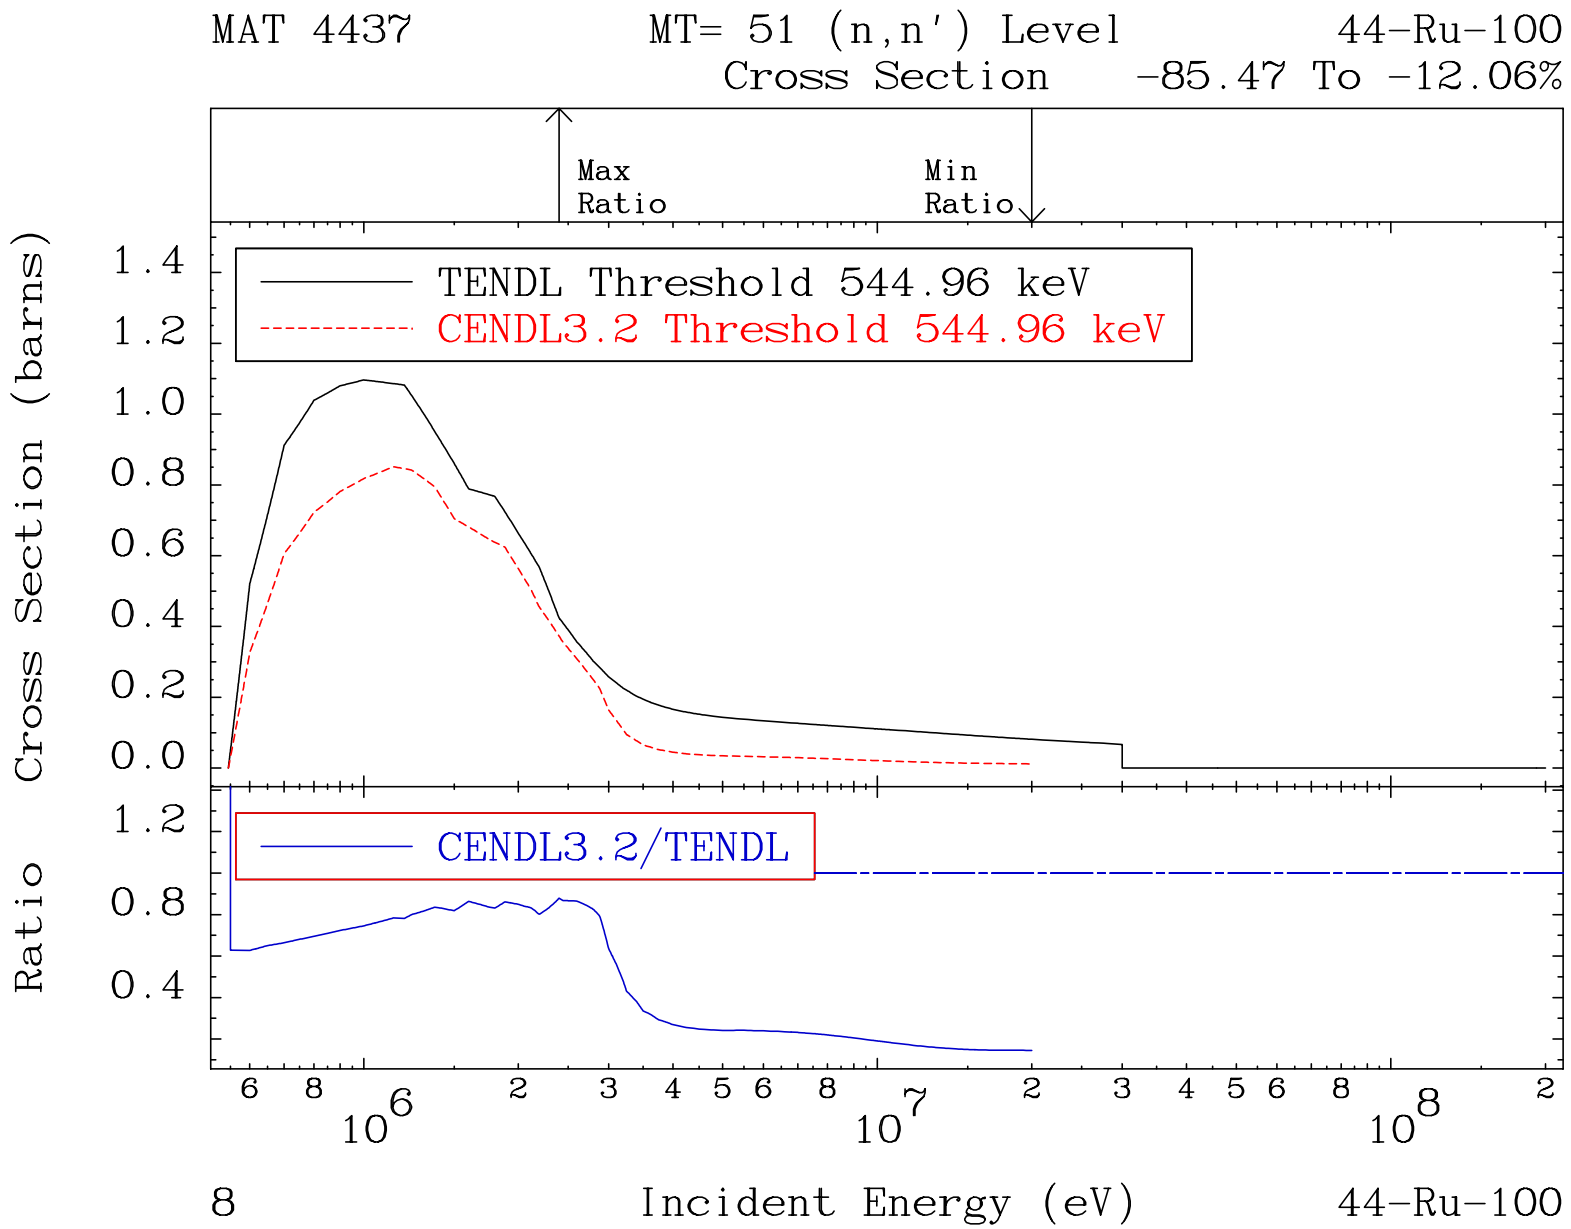
MAT 4437
MT= 51 (n,n') Level
Cross Section
44-Ru-100
-85.47 To -12.06%
Max Ratio
Min Ratio
TENDL Threshold 544.96 keV
CENDL3.2 Threshold 544.96 keV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
44-Ru-100
8

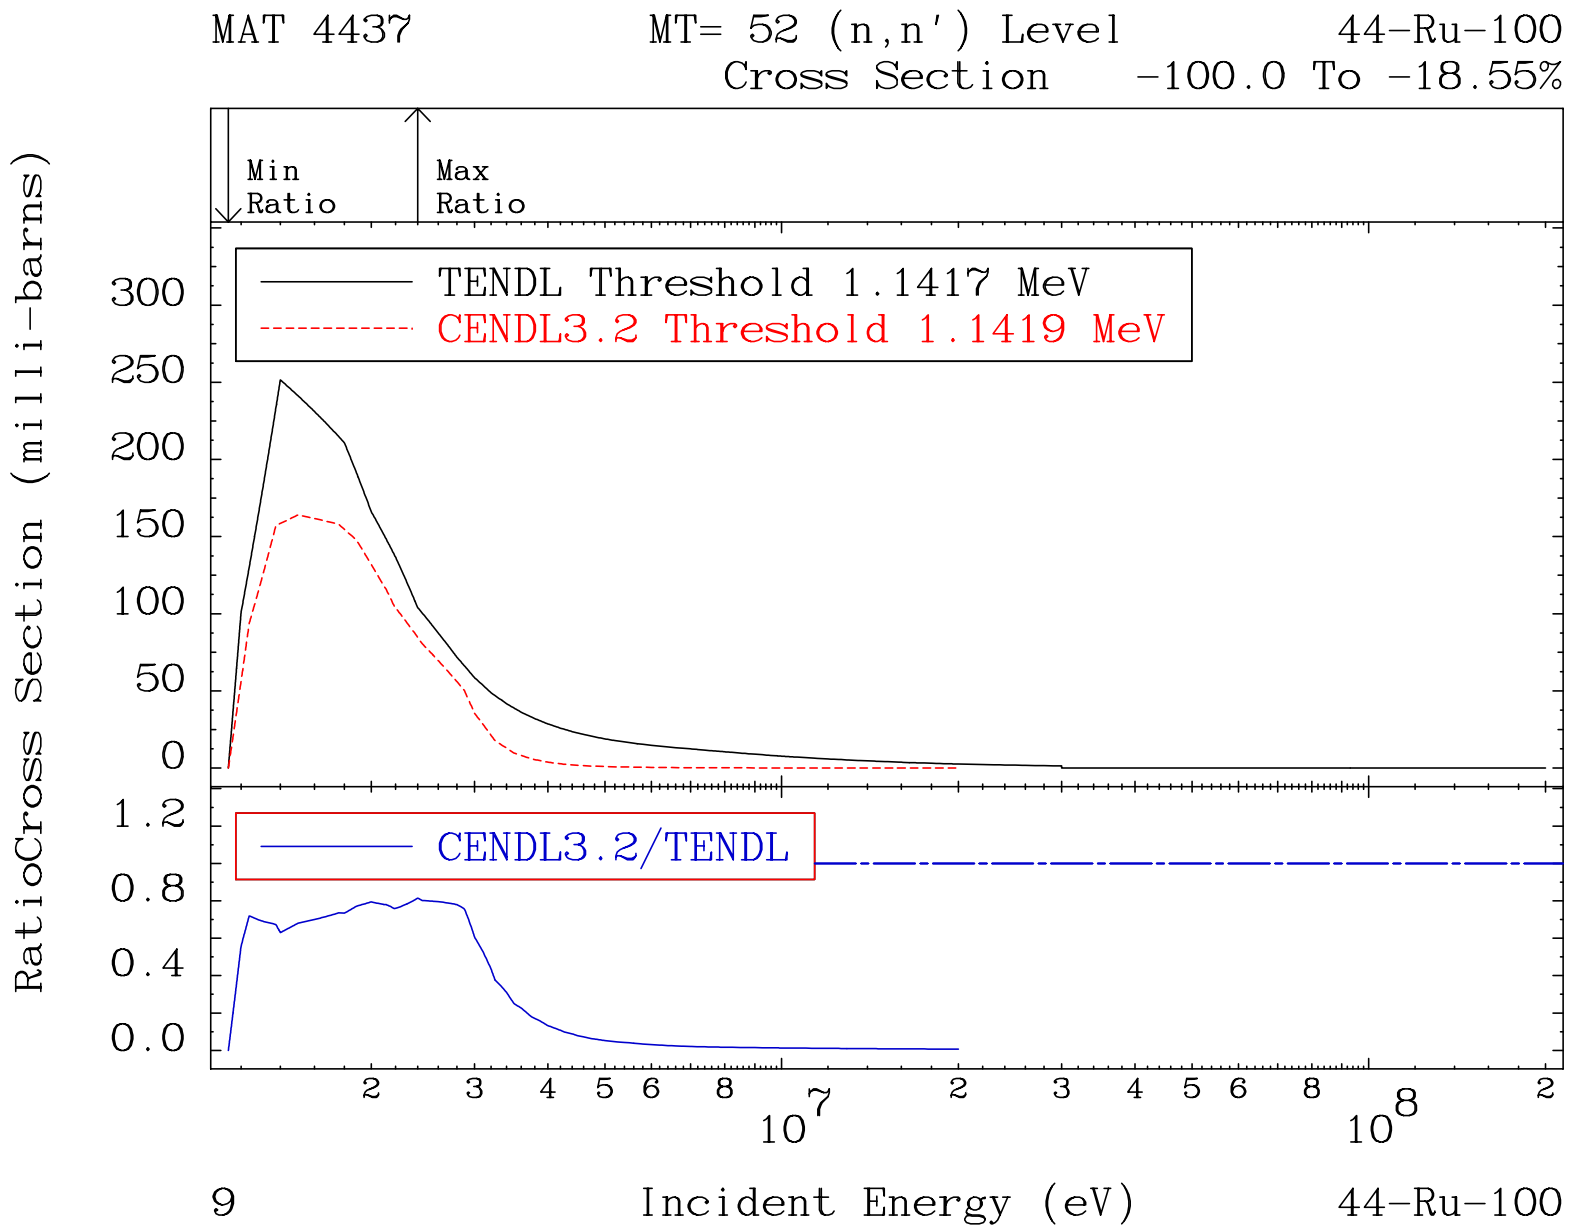
MAT 4437
MT= 52 (n,n') Level
44-Ru-100
Cross Section
-100.0 To -18.55%
Min Ratio
Max Ratio
TENDL Threshold 1.1417 MeV
CENDL3.2 Threshold 1.1419 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
300
250
200
150
100
50
0
1.2
0.8
0.4
0.0
2 3 4 5 6 8 10^7 2 3 4 5 6 8 10^8 2
Incident Energy (eV)
9
44-Ru-100

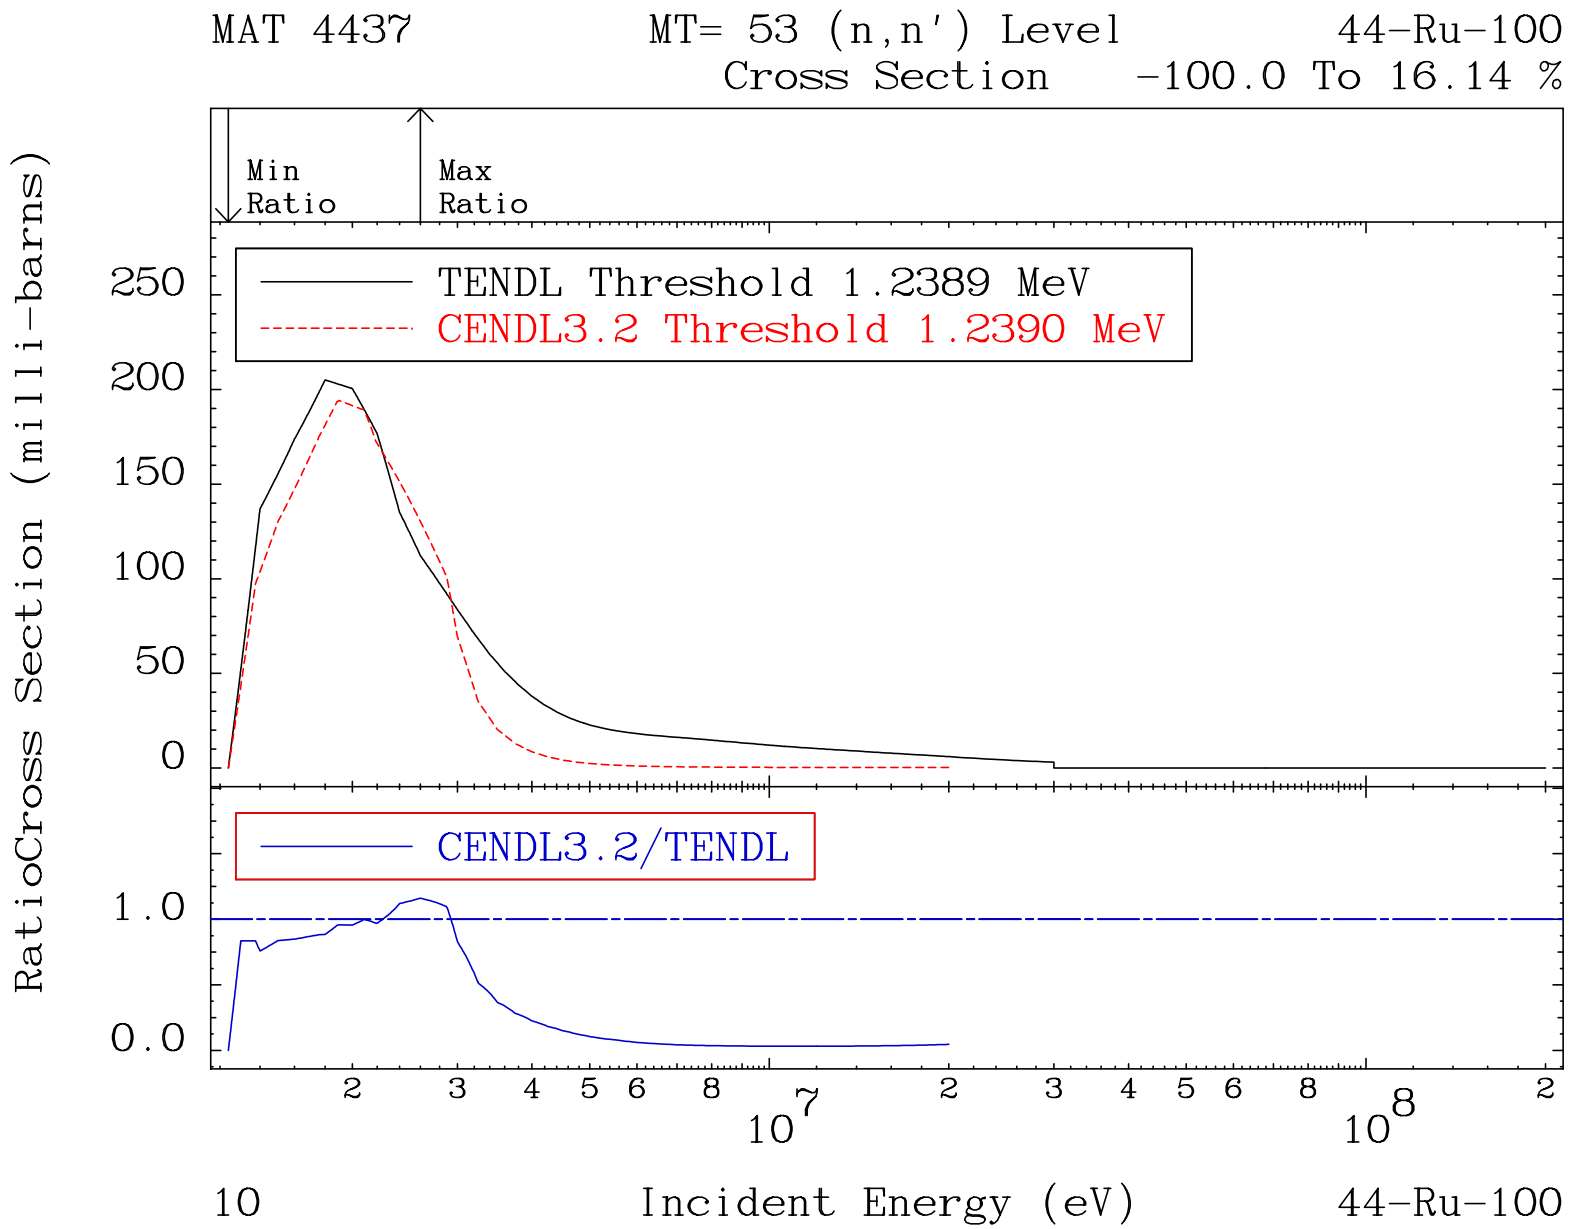
MAT 4437
MT= 53 (n,n') Level
44-Ru-100
Cross Section
-100.0 To 16.14 %
Min Ratio
Max Ratio
TENDL Threshold 1.2389 MeV
CENDL3.2 Threshold 1.2390 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
250
200
150
100
50
0
1.0
0.0
2 3 4 5 6 8 10^7 2 3 4 5 6 8 10^8 2
10
Incident Energy (eV)
44-Ru-100

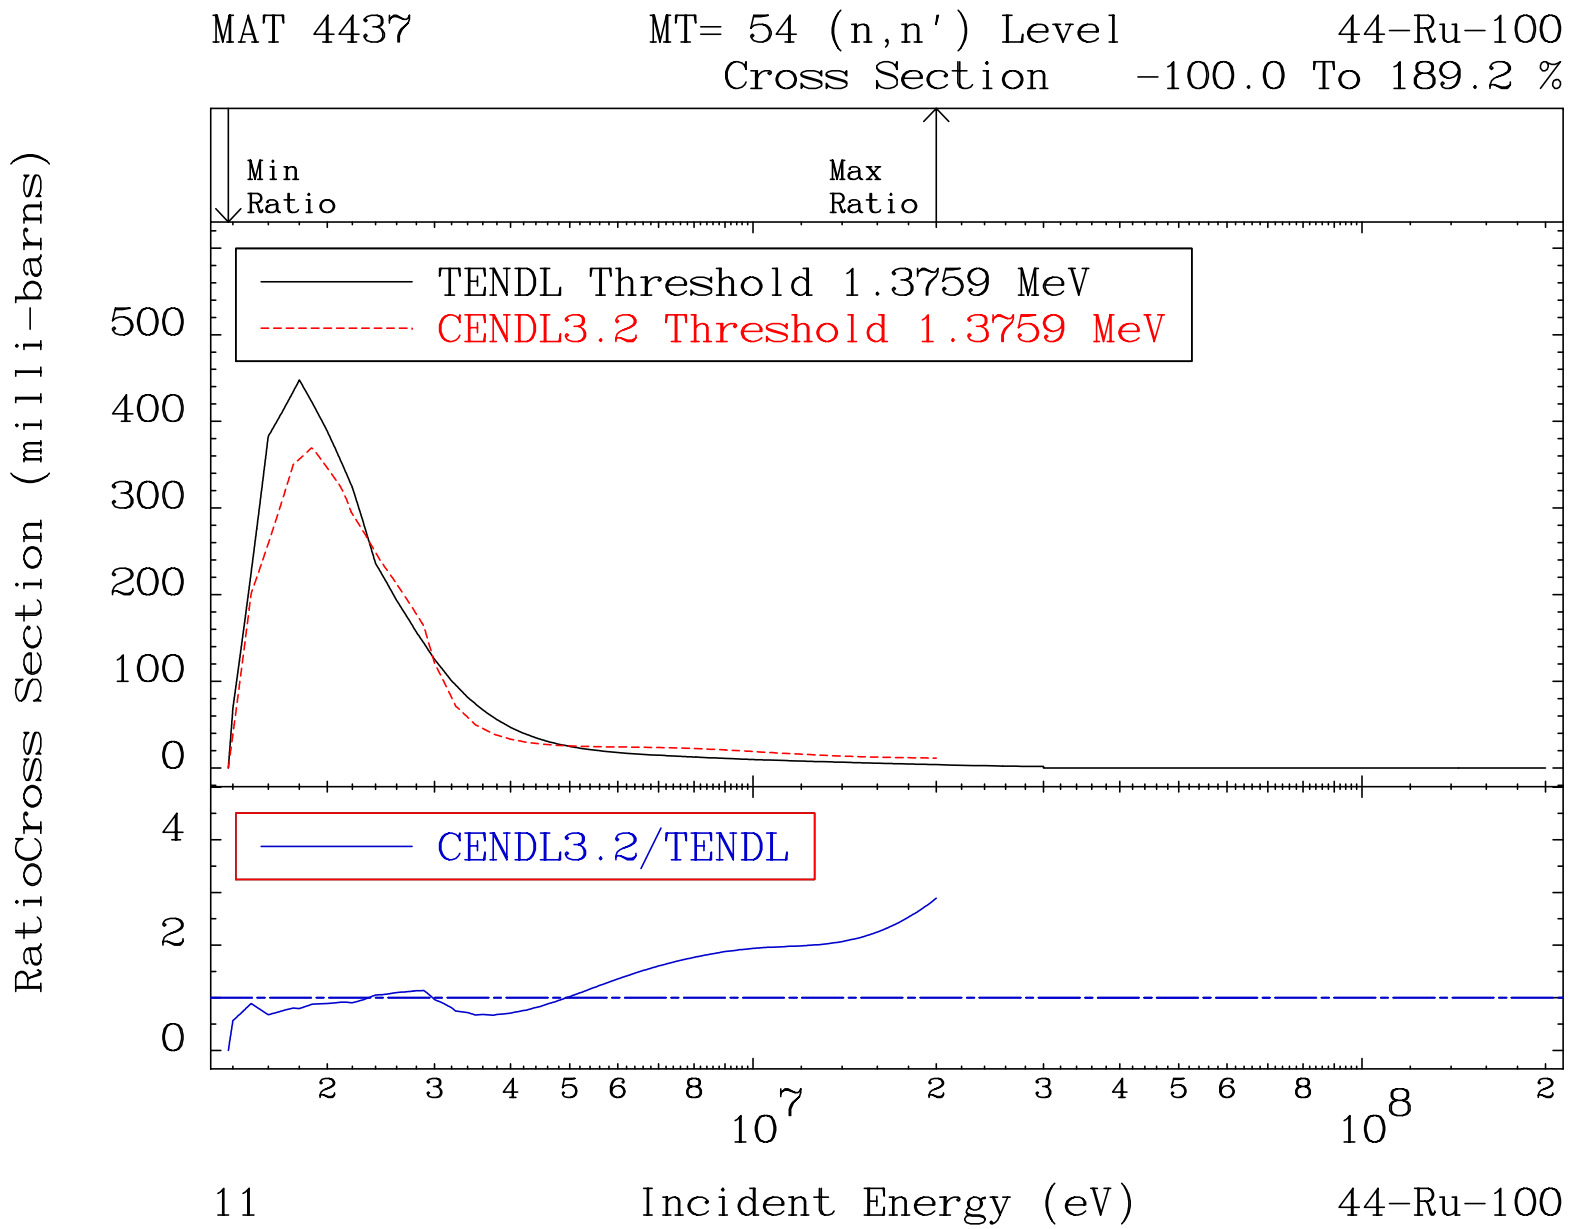
MAT 4437
MT= 54 (n,n') Level
44-Ru-100
Cross Section -100.0 To 189.2 %
Min Ratio
Max Ratio
TENDL Threshold 1.3759 MeV
CENDL3.2 Threshold 1.3759 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
500
400
300
200
100
0
4
2
0
2 3 4 5 6 8 10^7 2 3 4 5 6 8 10^8 2
11
Incident Energy (eV)
44-Ru-100

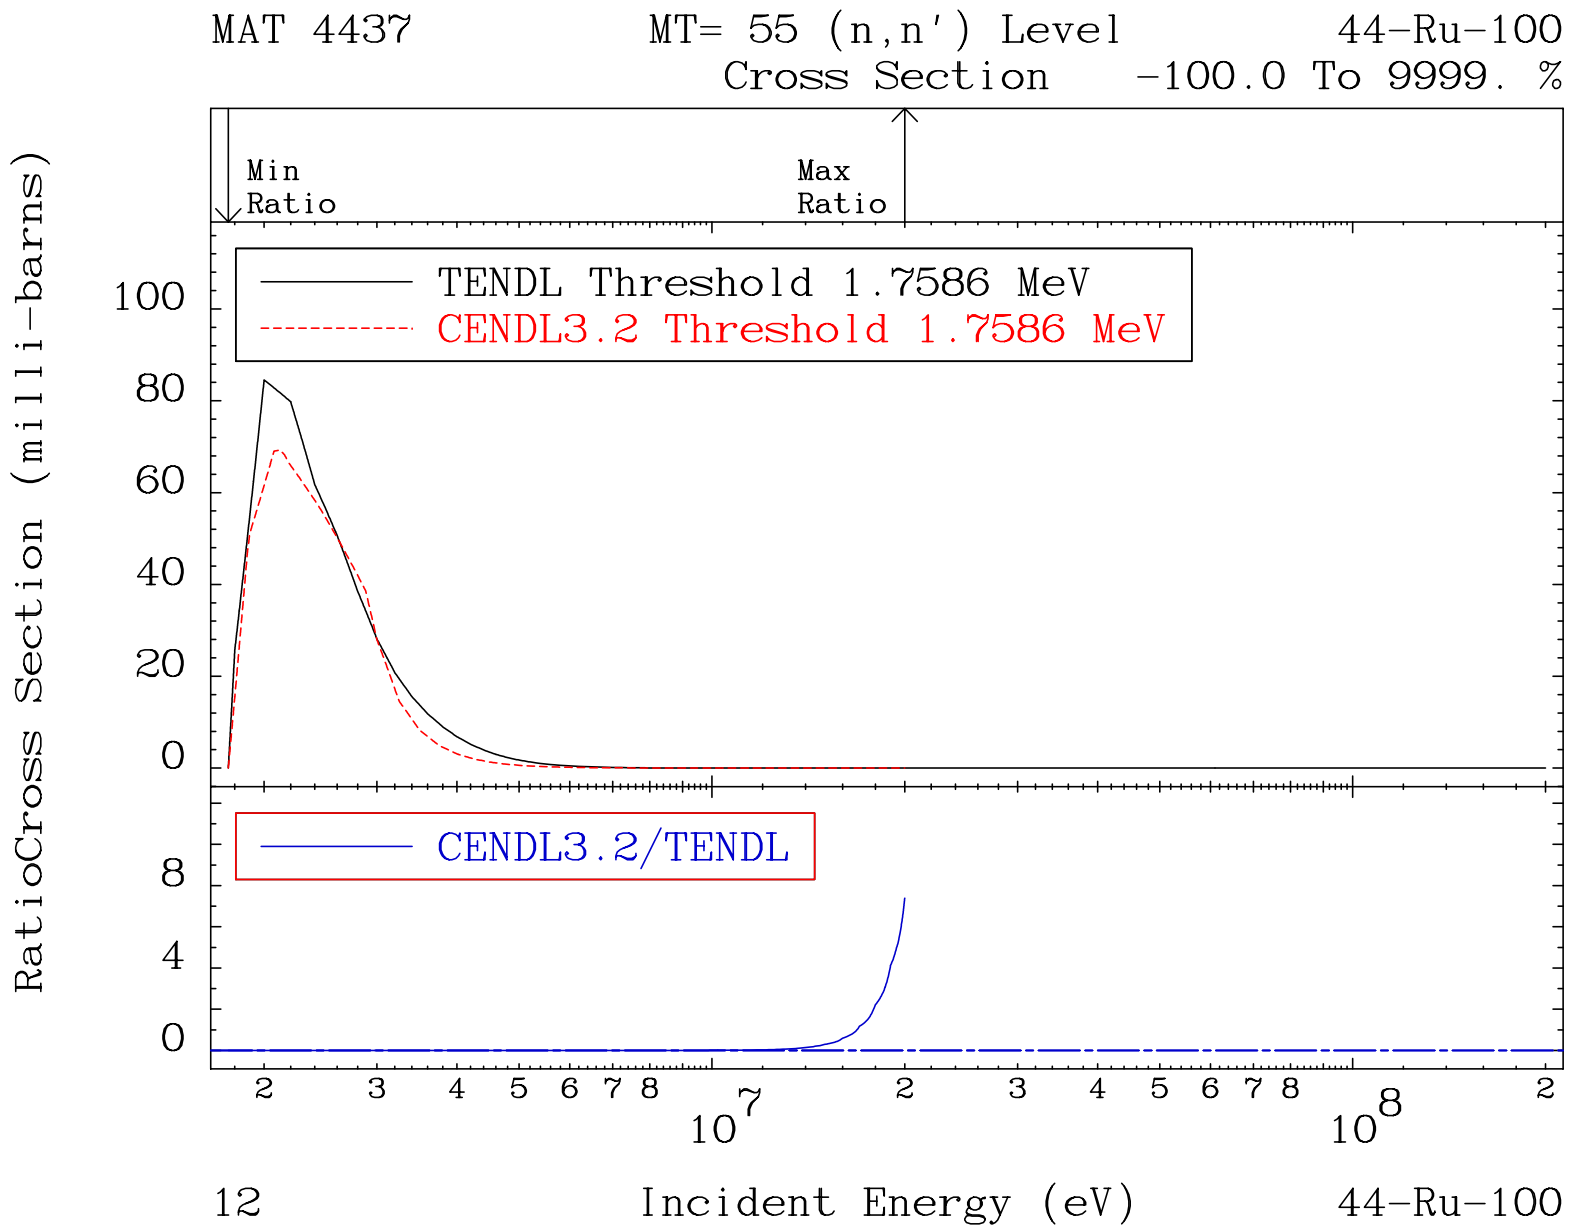
MAT 4437
MT= 55 (n,n') Level
44-Ru-100
Cross Section -100.0 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 1.7586 MeV
CENDL3.2 Threshold 1.7586 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
100
80
60
40
20
0
8
4
0
2 3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
12
Incident Energy (eV)
44-Ru-100

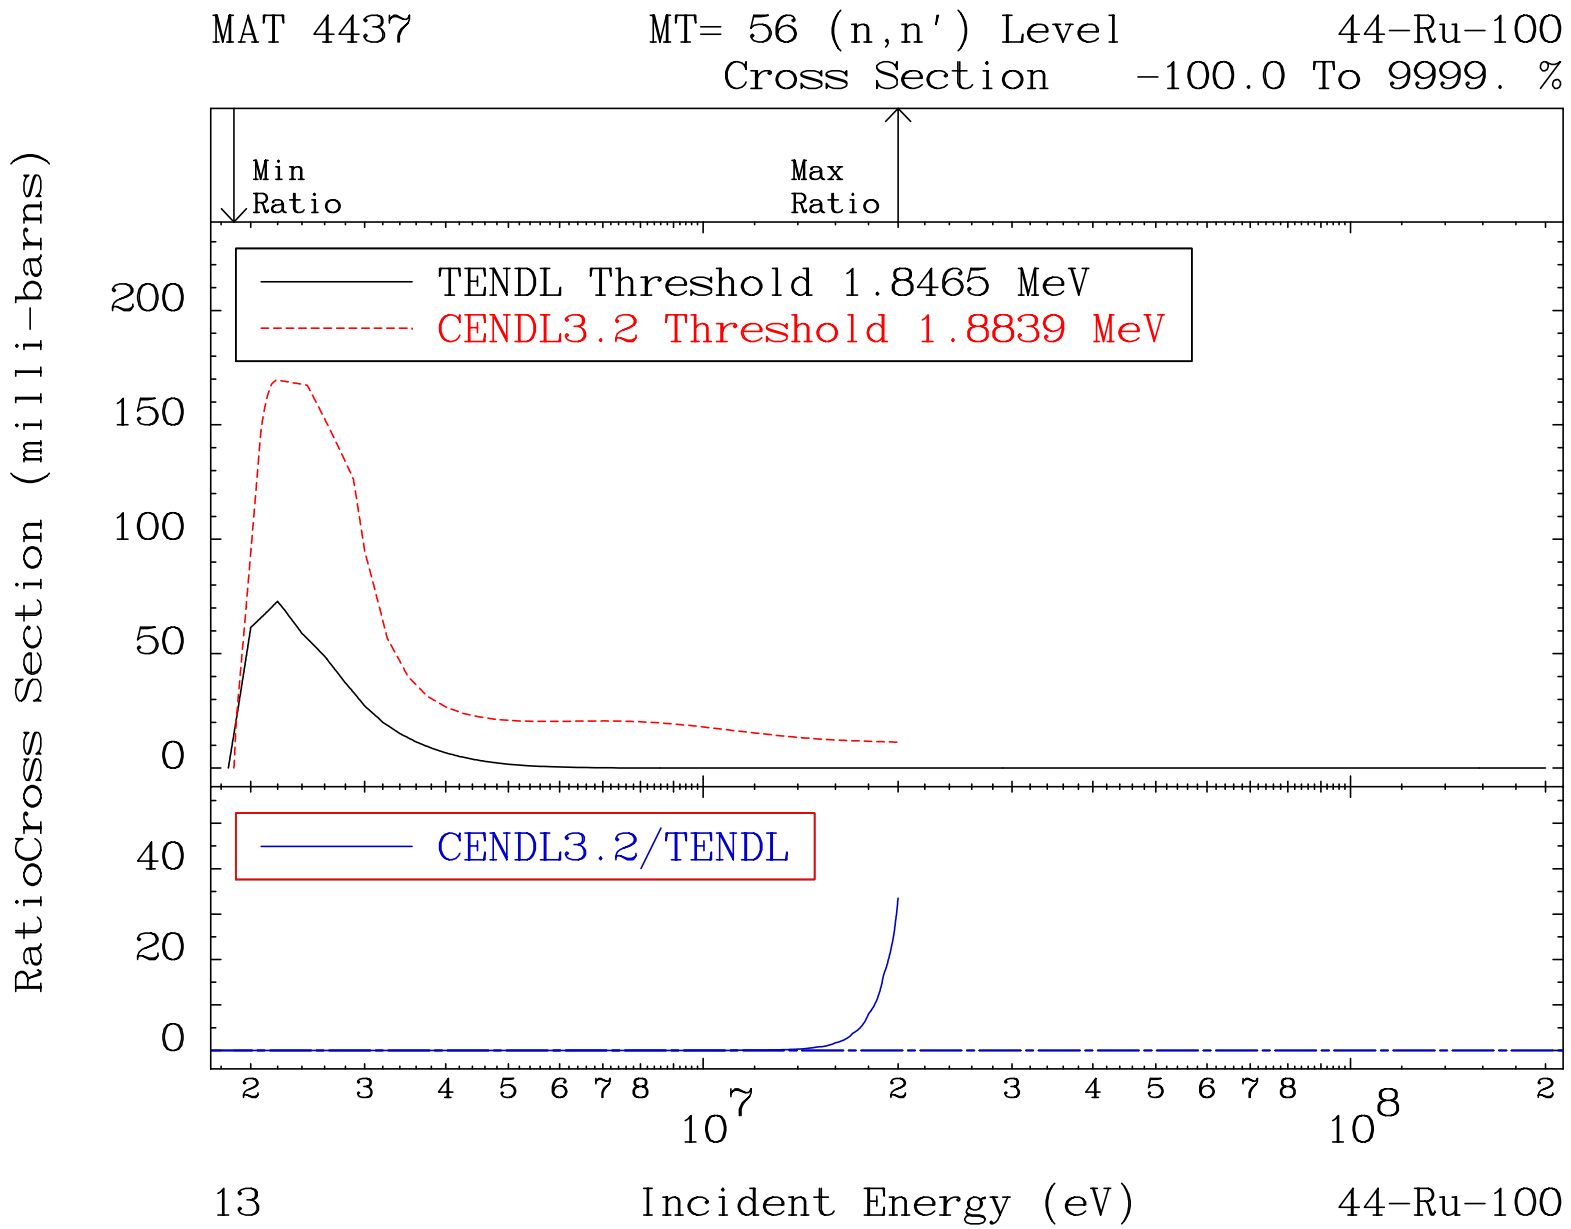
MAT 4437
MT= 56 (n,n') Level
44-Ru-100
Cross Section -100.0 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 1.8465 MeV
CENDL3.2 Threshold 1.8839 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
200
150
100
50
0
40
20
0
2 3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
13
Incident Energy (eV)
44-Ru-100

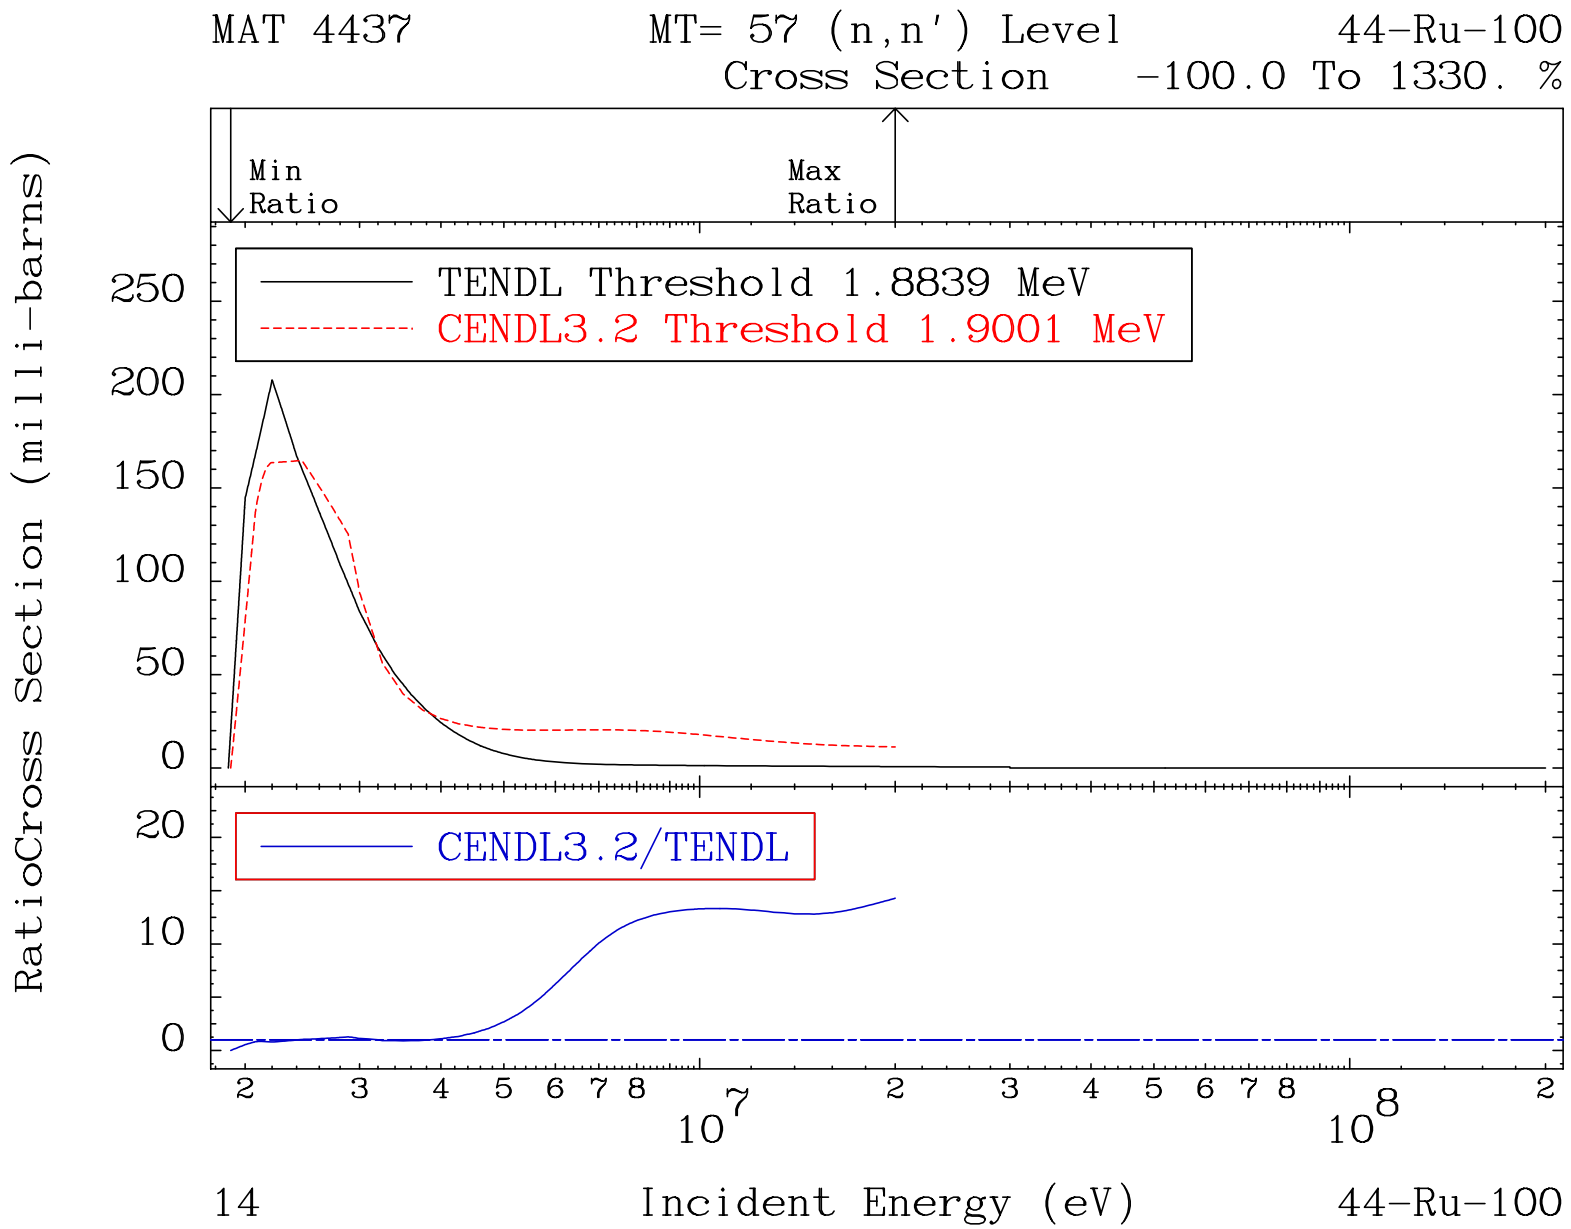
MAT 4437
MT= 57 (n,n') Level
44-Ru-100
Cross Section -100.0 To 1330. %
Min Ratio
Max Ratio
TENDL Threshold 1.8839 MeV
CENDL3.2 Threshold 1.9001 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
250
200
150
100
50
0
20
10
0
2 3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
14
Incident Energy (eV)
44-Ru-100

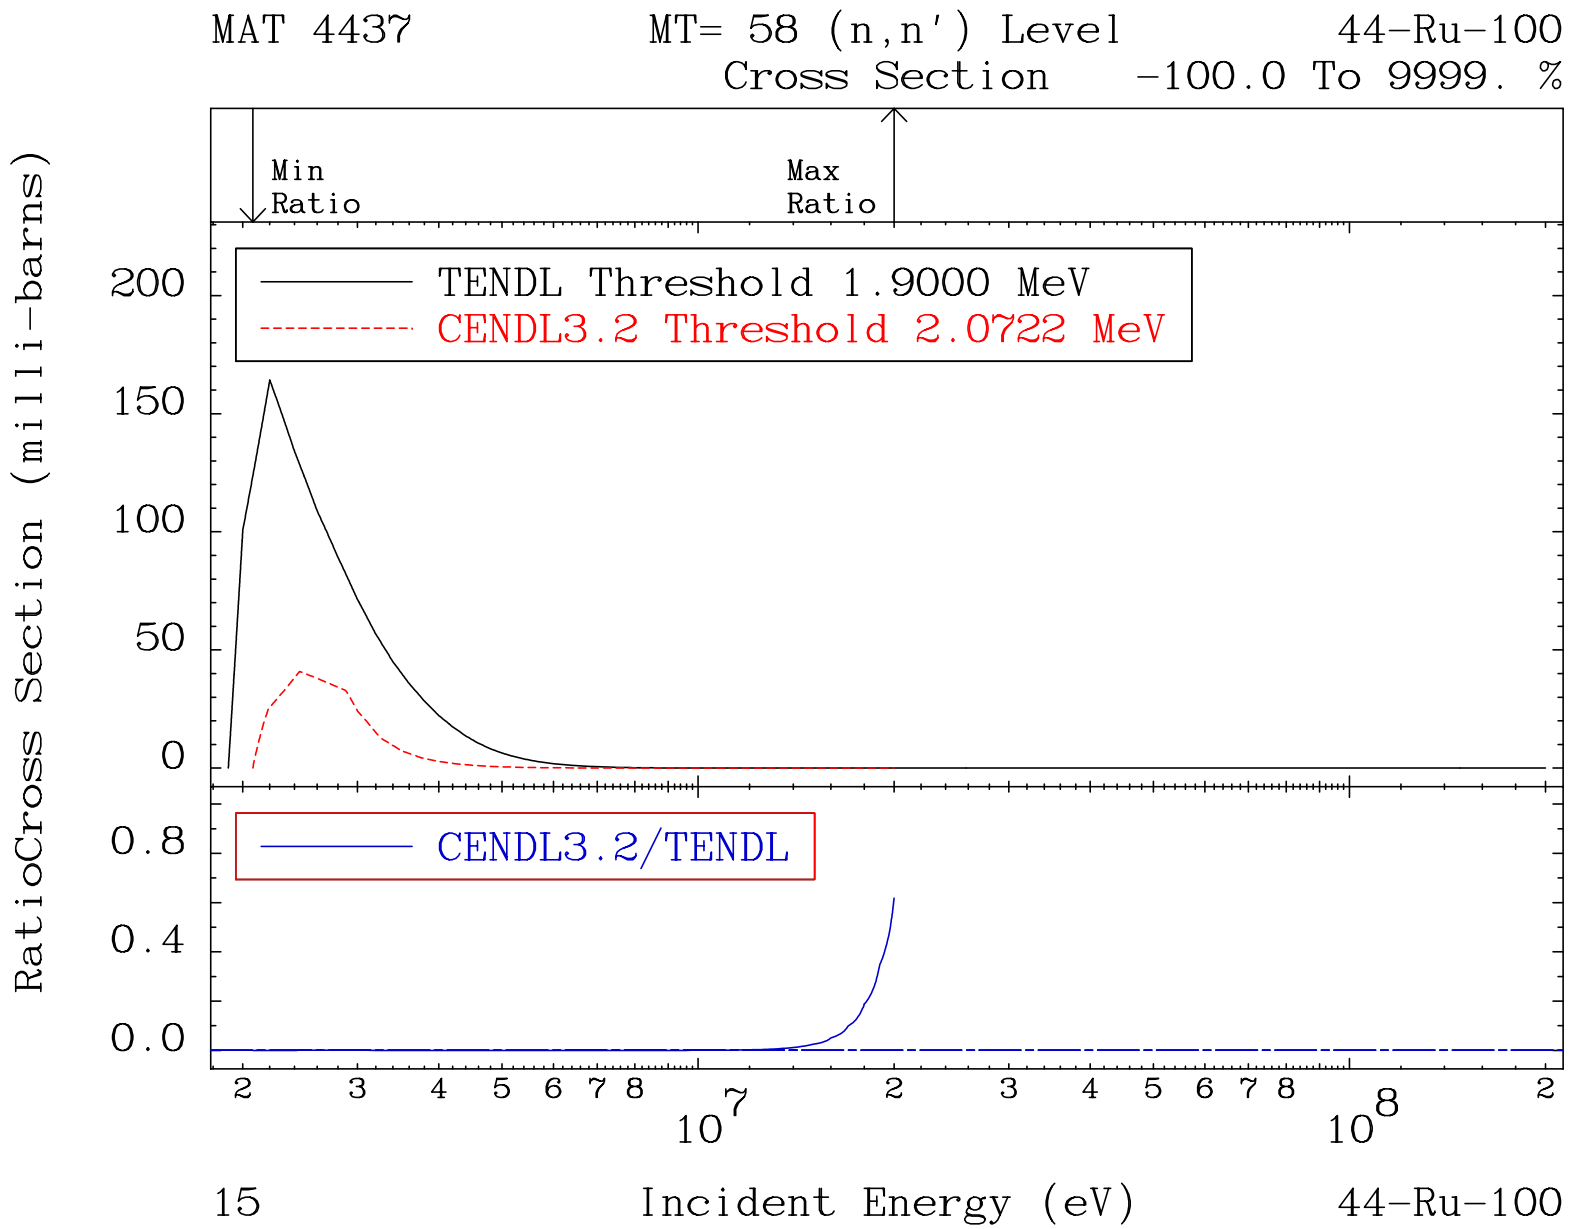
MAT 4437
MT= 58 (n,n') Level
44-Ru-100
Cross Section -100.0 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 1.9000 MeV
CENDL3.2 Threshold 2.0722 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
200
150
100
50
0
0.8
0.4
0.0
2 3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
15
Incident Energy (eV)
44-Ru-100

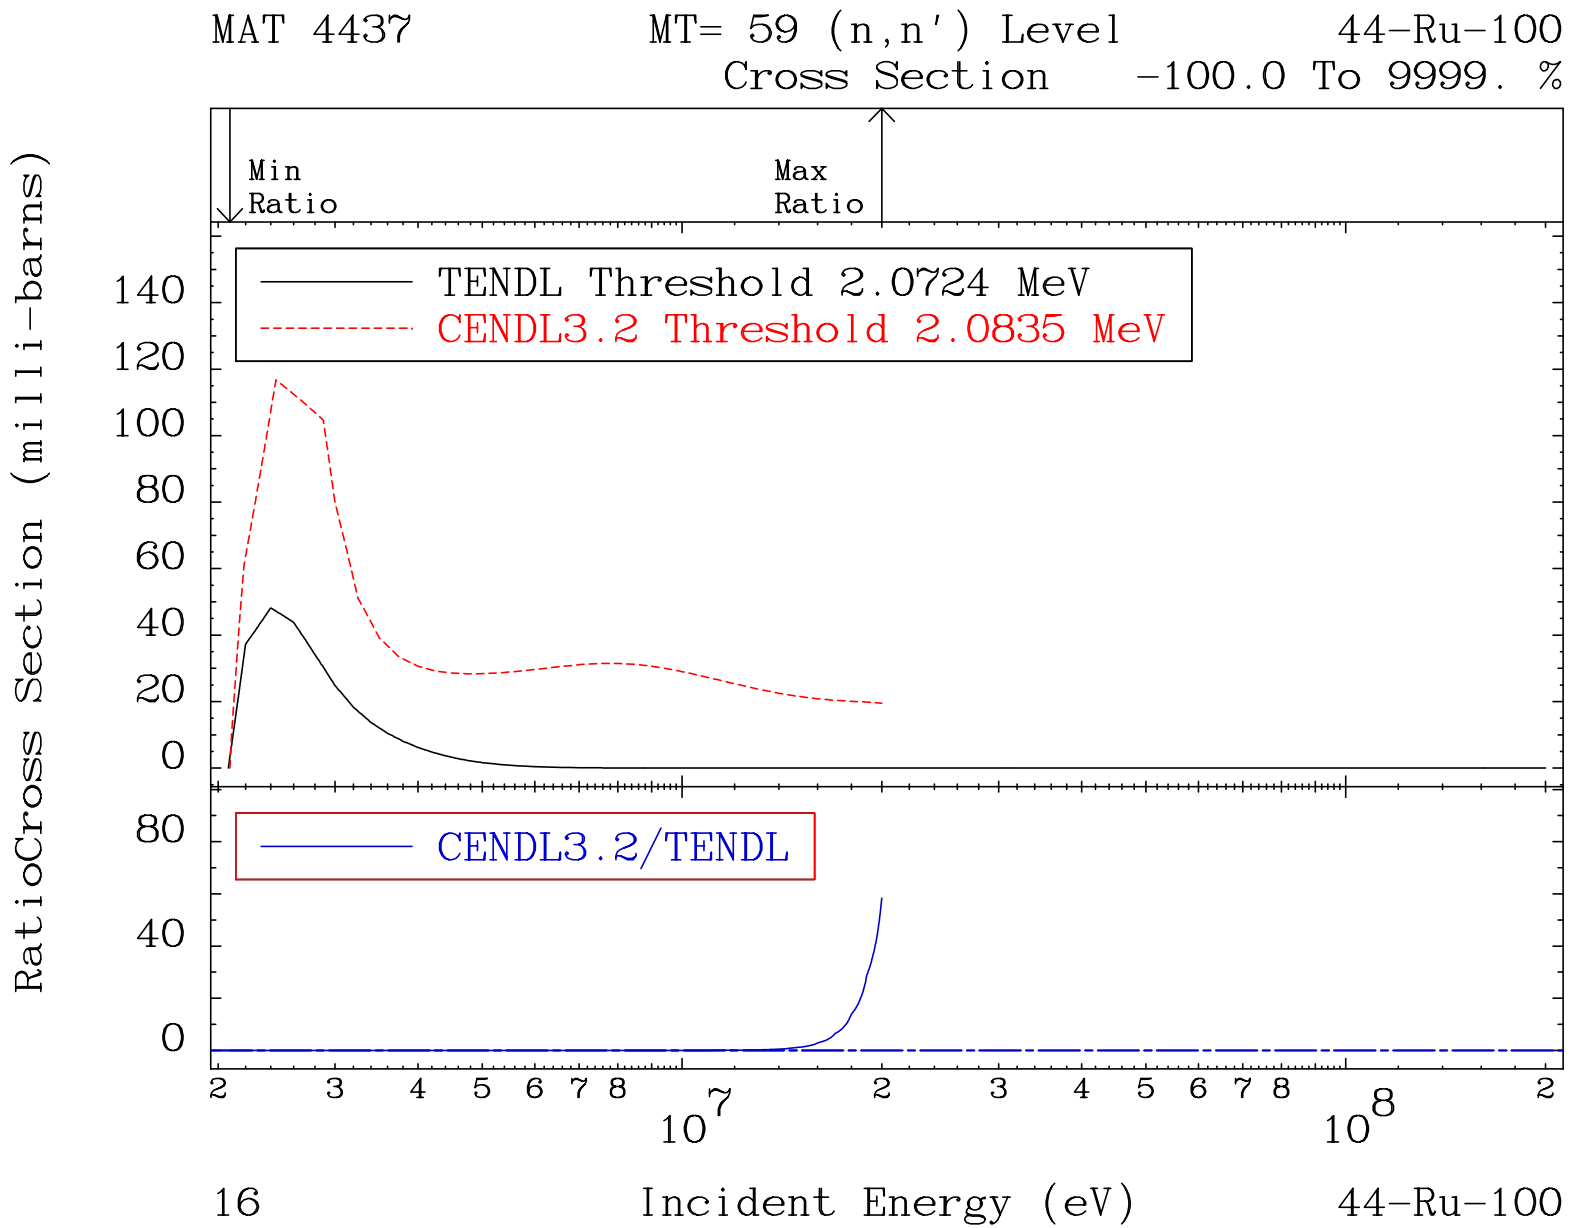
MAT 4437
MT= 59 (n,n') Level
44-Ru-100
Cross Section -100.0 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 2.0724 MeV
CENDL3.2 Threshold 2.0835 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
140
120
100
80
60
40
20
0
80
40
0
2 3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
16
Incident Energy (eV)
44-Ru-100

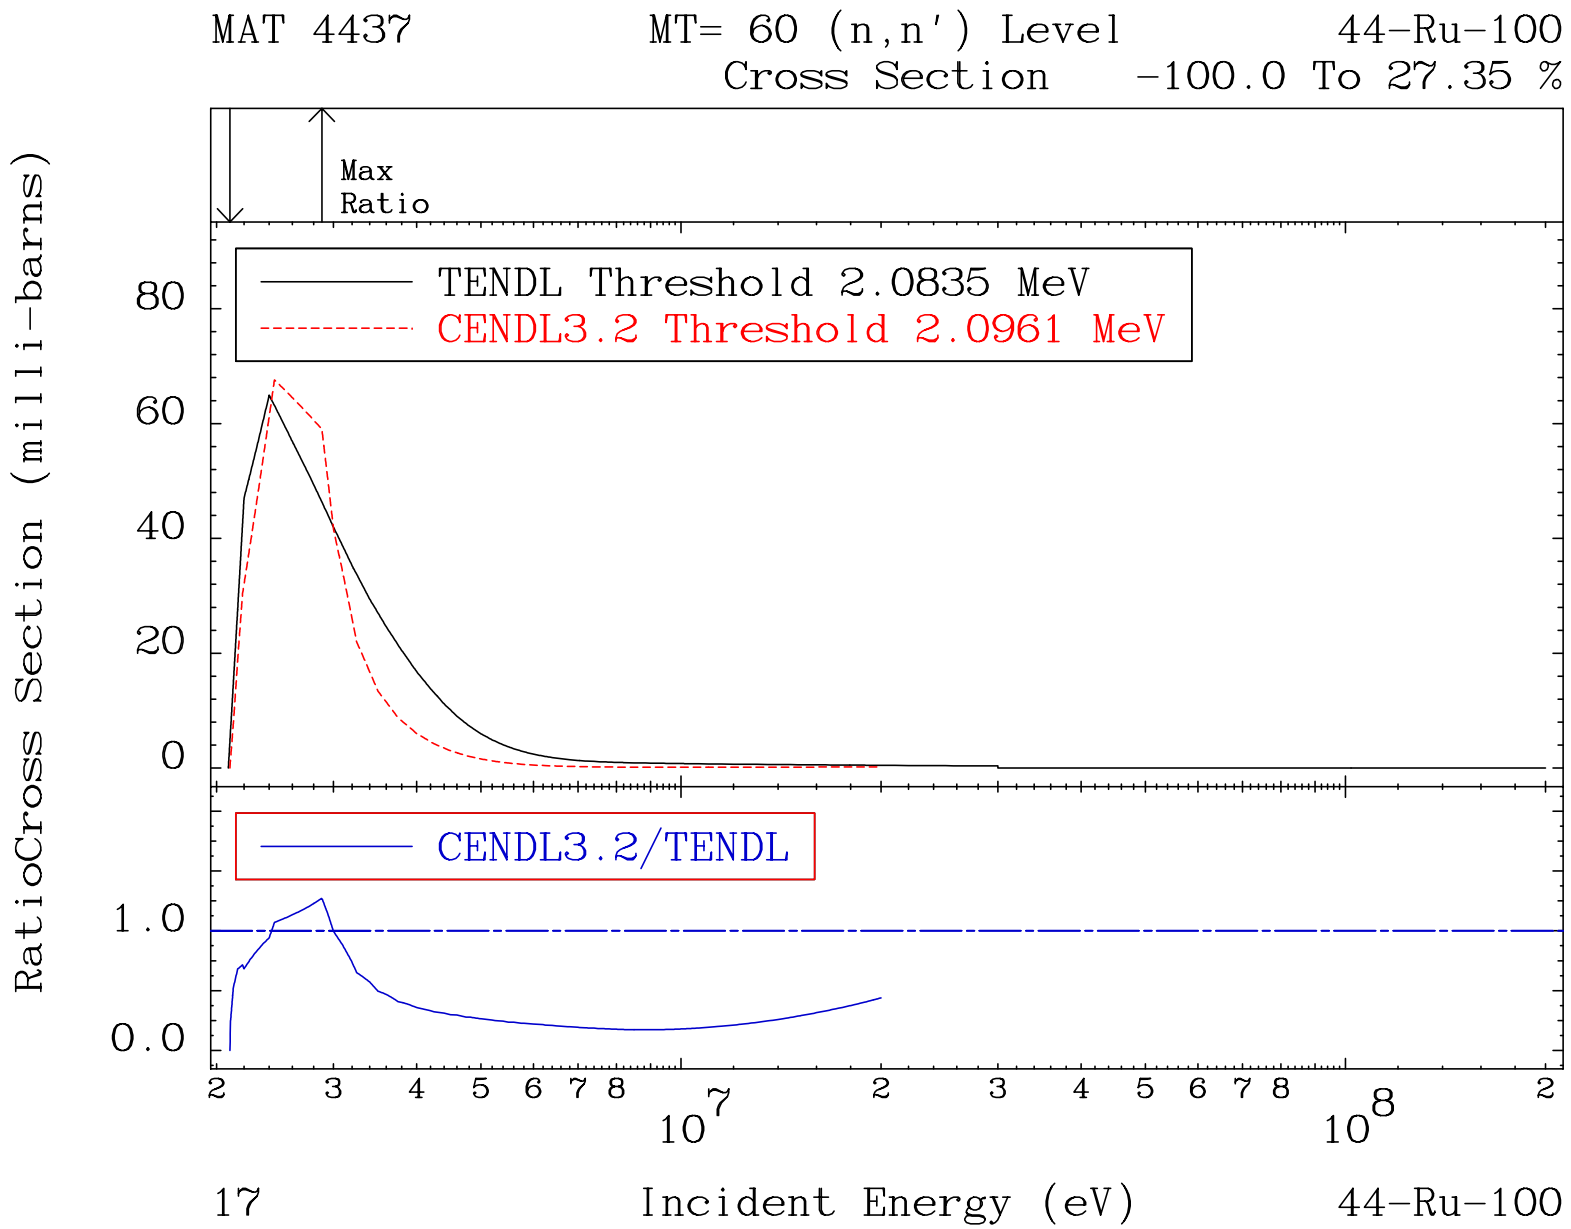
MAT 4437
MT= 60 (n,n') Level
44-Ru-100
Cross Section -100.0 To 27.35 %
Max
Ratio
TENDL Threshold 2.0835 MeV
CENDL3.2 Threshold 2.0961 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
80
60
40
20
0
1.0
0.0
2 3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
17
Incident Energy (eV)
44-Ru-100

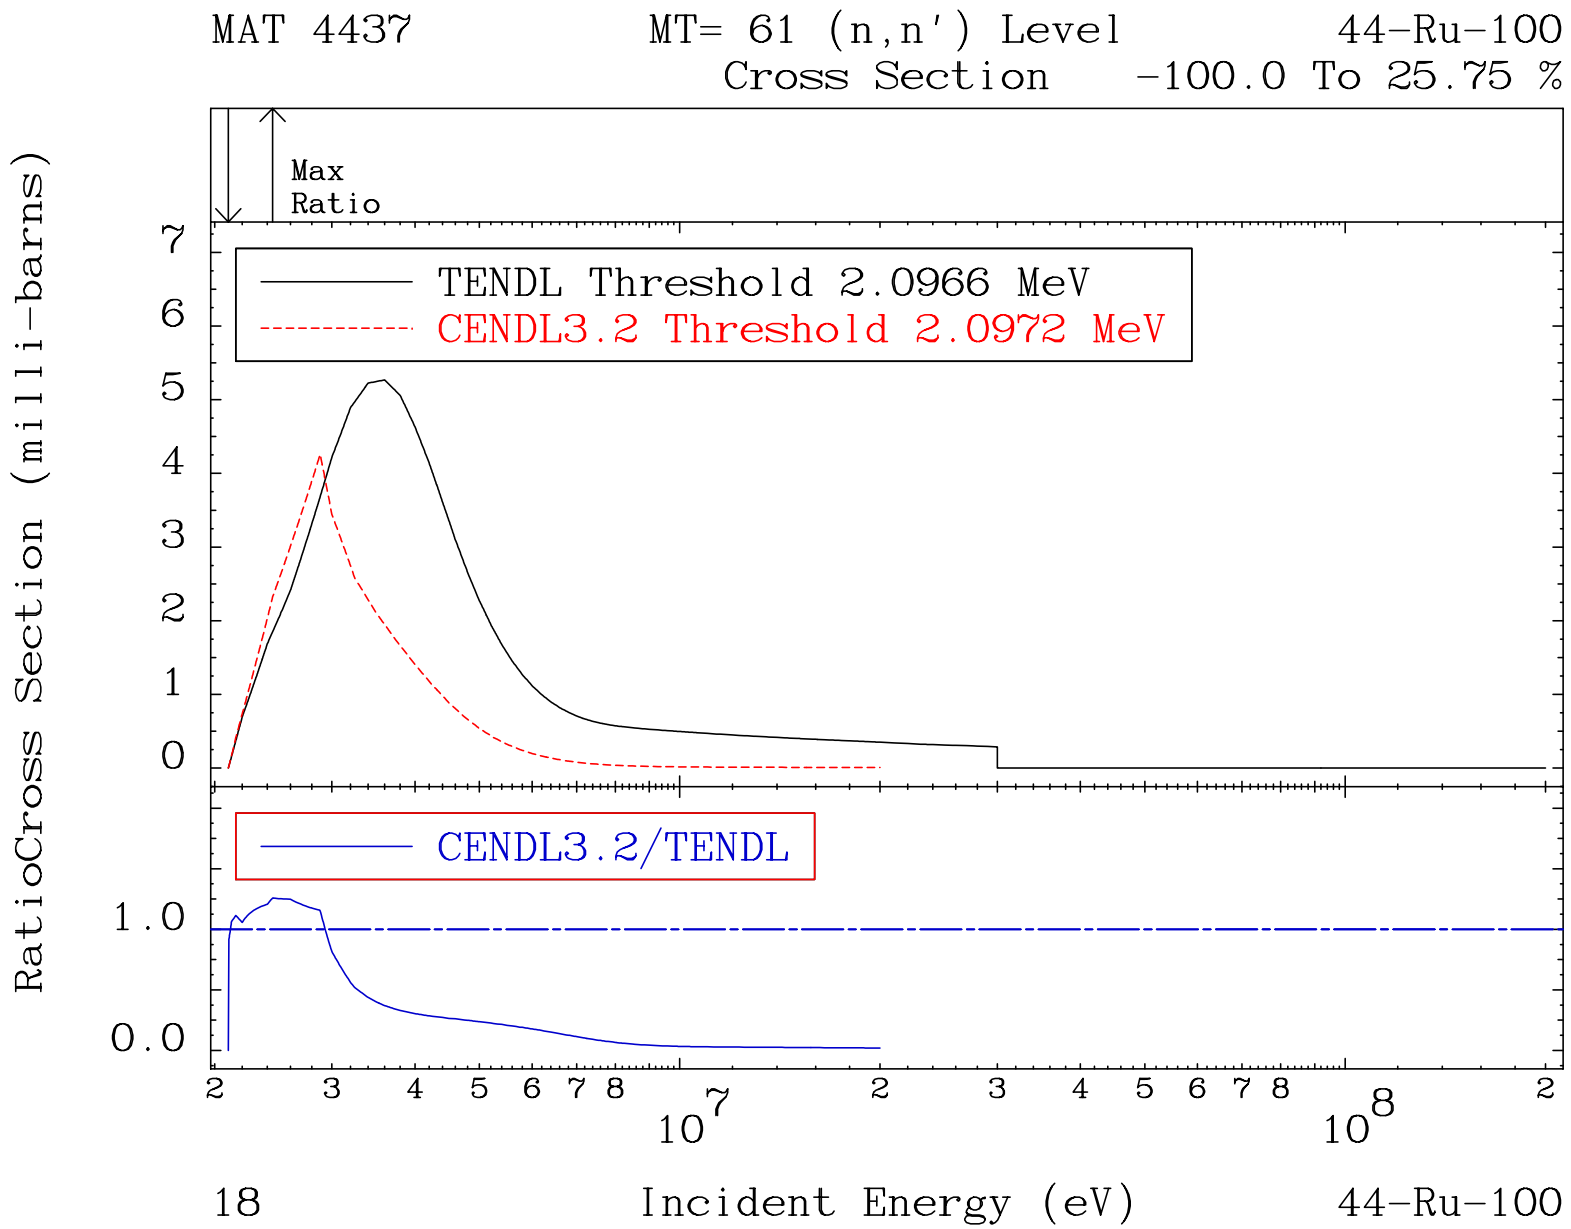
MAT 4437
MT= 61 (n,n') Level
44-Ru-100
Cross Section
-100.0 To 25.75 %
Max
Ratio
TENDL Threshold 2.0966 MeV
CENDL3.2 Threshold 2.0972 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
18
44-Ru-100

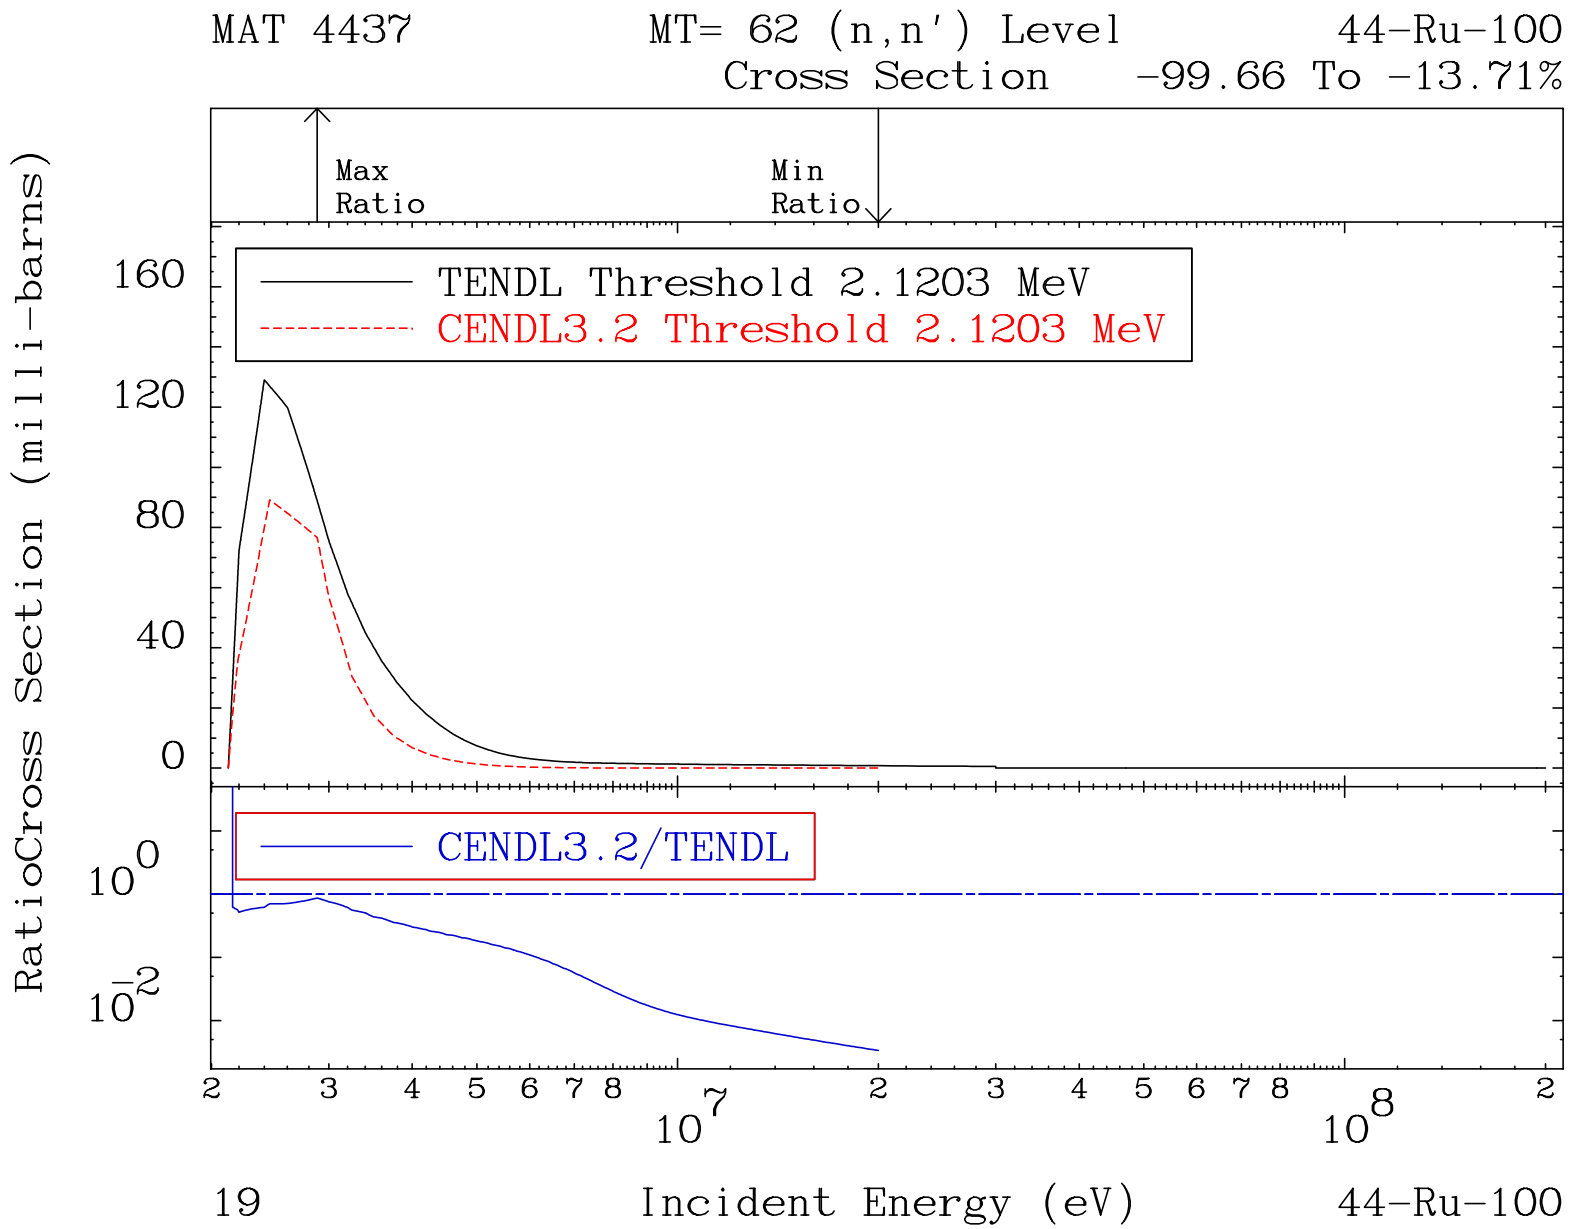
MAT 4437
MT= 62 (n,n') Level
Cross Section
44-Ru-100
-99.66 To -13.71%
Max Ratio
Min Ratio
TENDL Threshold 2.1203 MeV
CENDL3.2 Threshold 2.1203 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
160
120
80
40
0
10^0
10^-2
2 3 4 5 6 7 8 10^7 2 3 4 5 6 7 8 10^8 2
Incident Energy (eV)
19
44-Ru-100

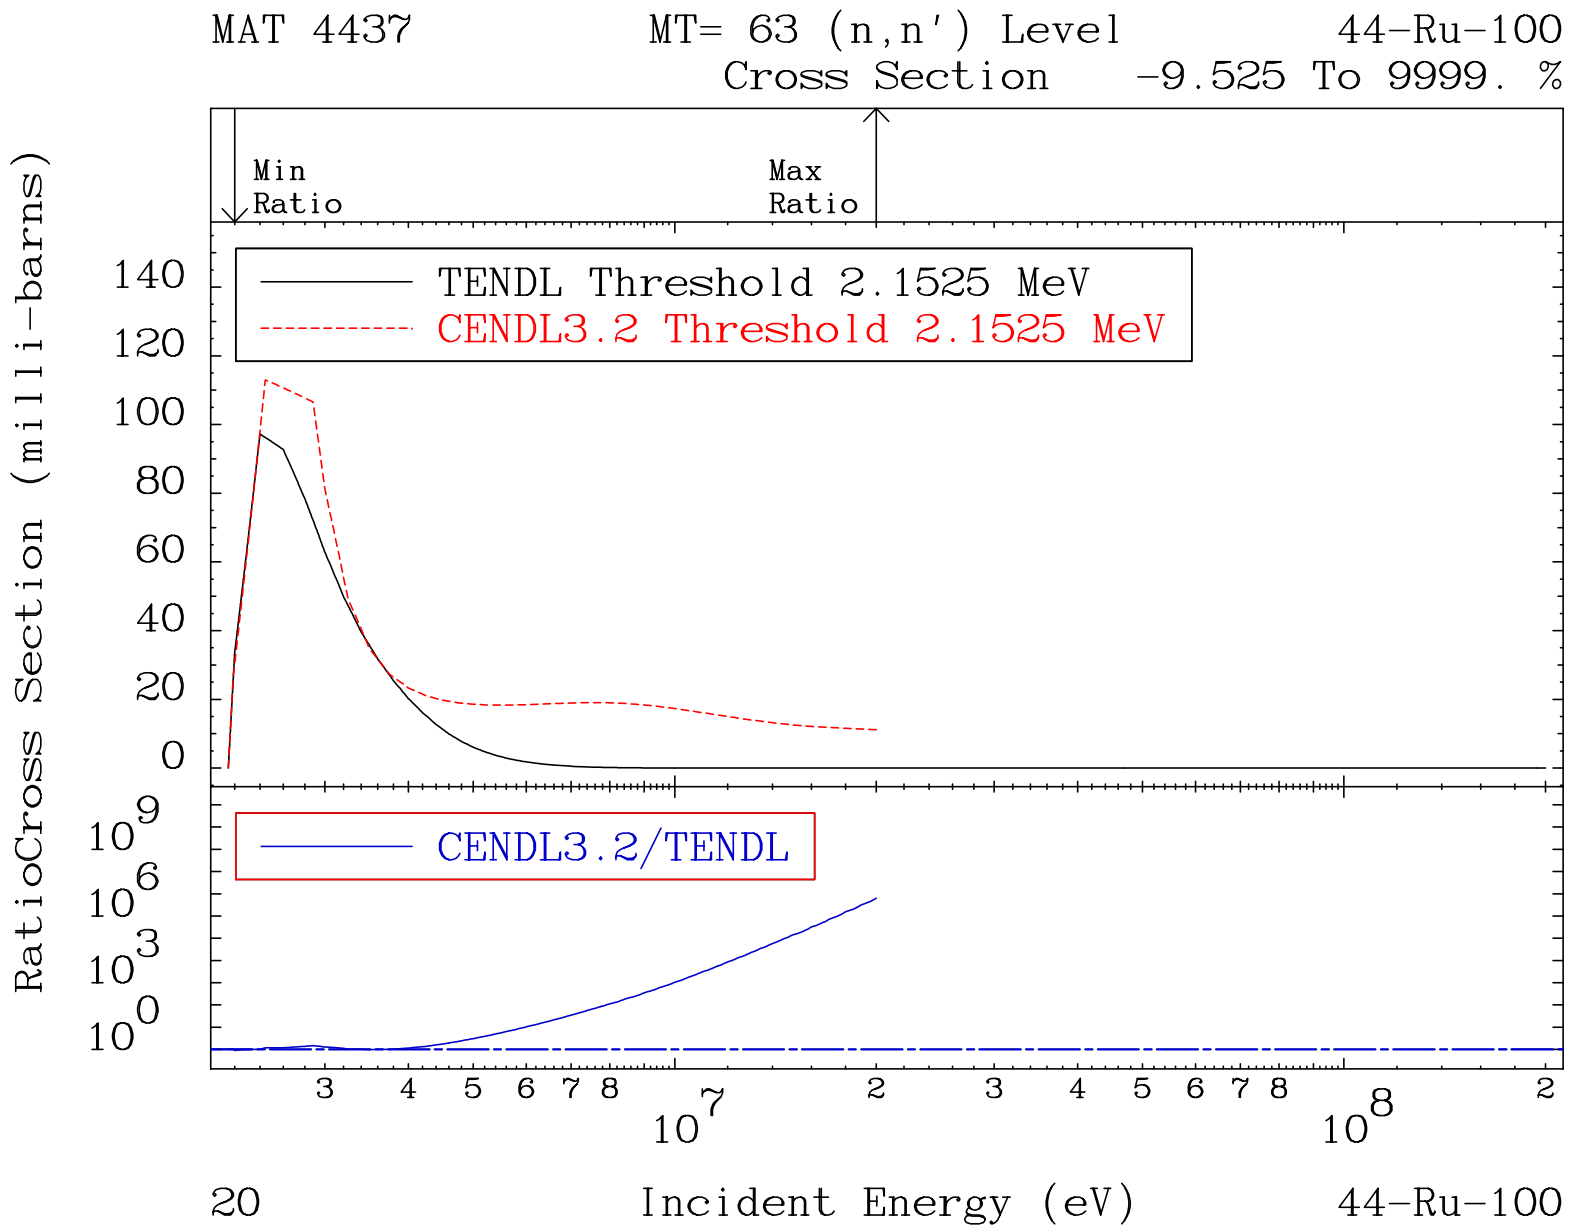
MAT 4437
MT= 63 (n,n') Level
44-Ru-100
Cross Section
-9.525 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 2.1525 MeV
CENDL3.2 Threshold 2.1525 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
140
120
100
80
60
40
20
0
10^9
10^6
10^3
10^0
3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
20
Incident Energy (eV)
44-Ru-100

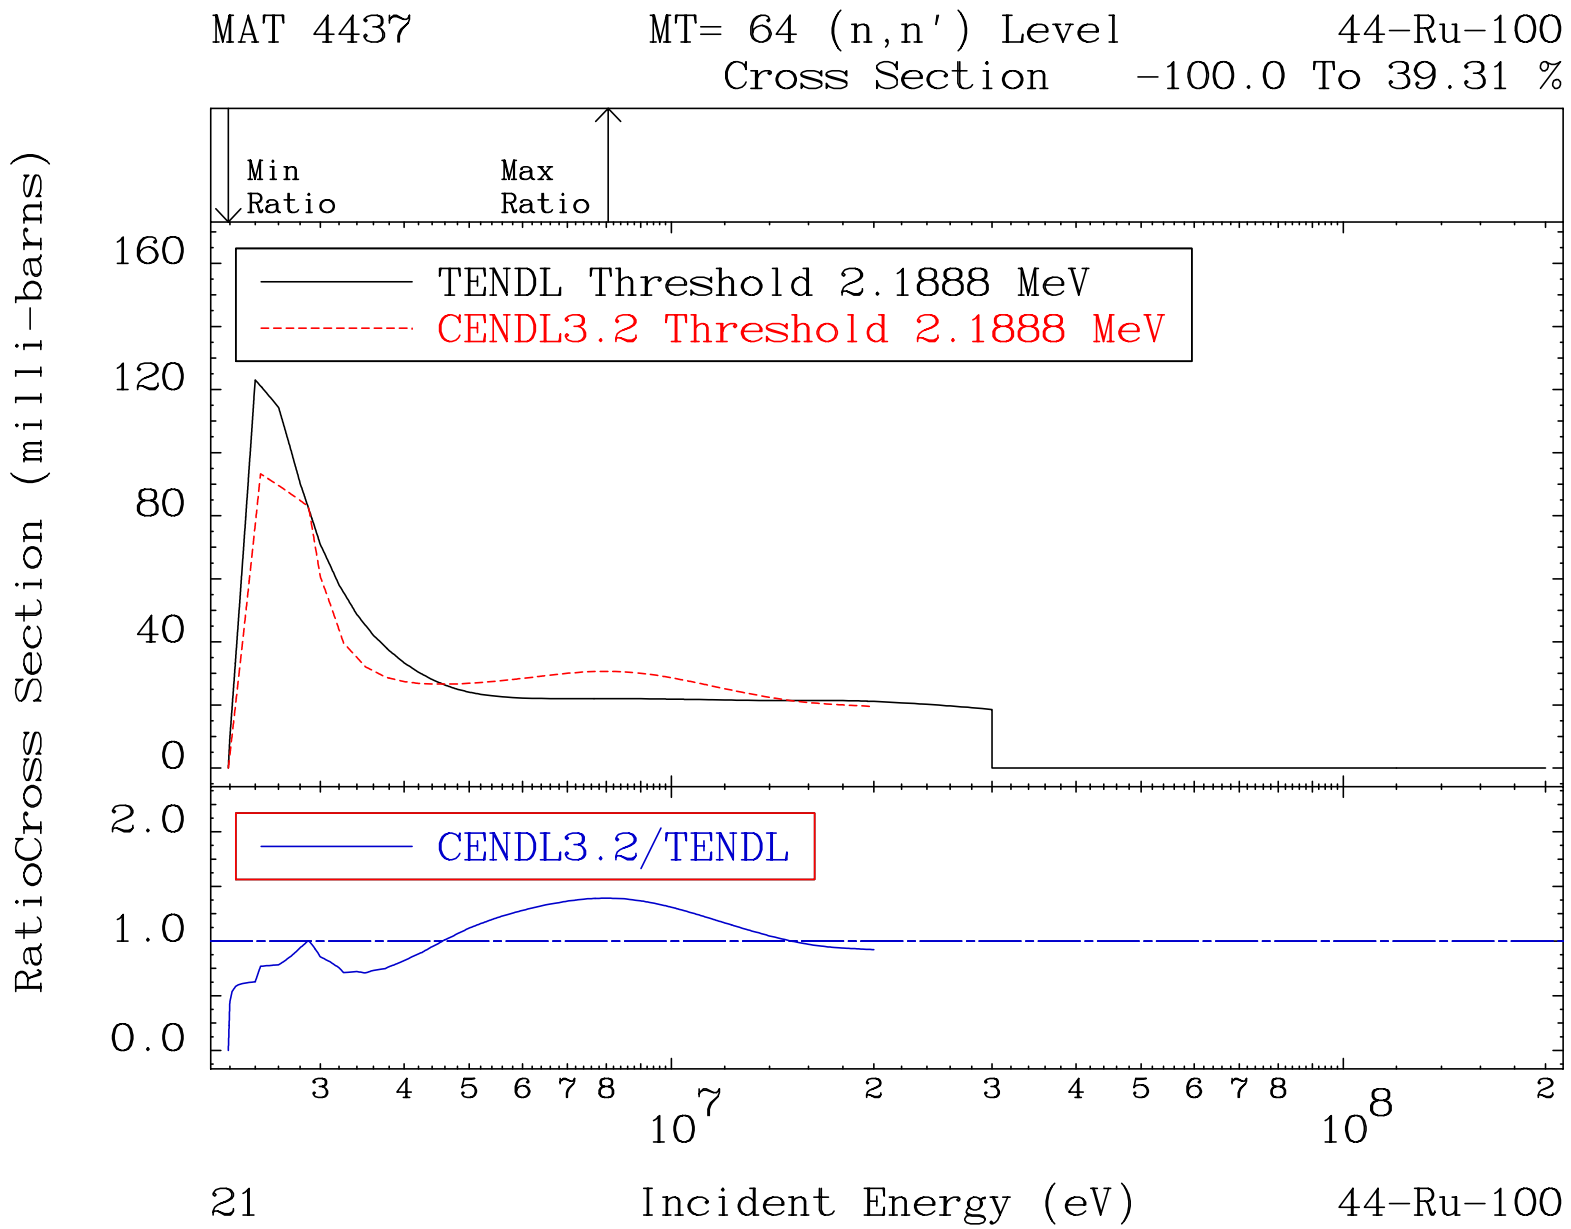
MAT 4437
MT= 64 (n,n') Level
44-Ru-100
Cross Section -100.0 To 39.31 %
Min Ratio
Max Ratio
TENDL Threshold 2.1888 MeV
CENDL3.2 Threshold 2.1888 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
160
120
80
40
0
2.0
1.0
0.0
3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
21
Incident Energy (eV)
44-Ru-100

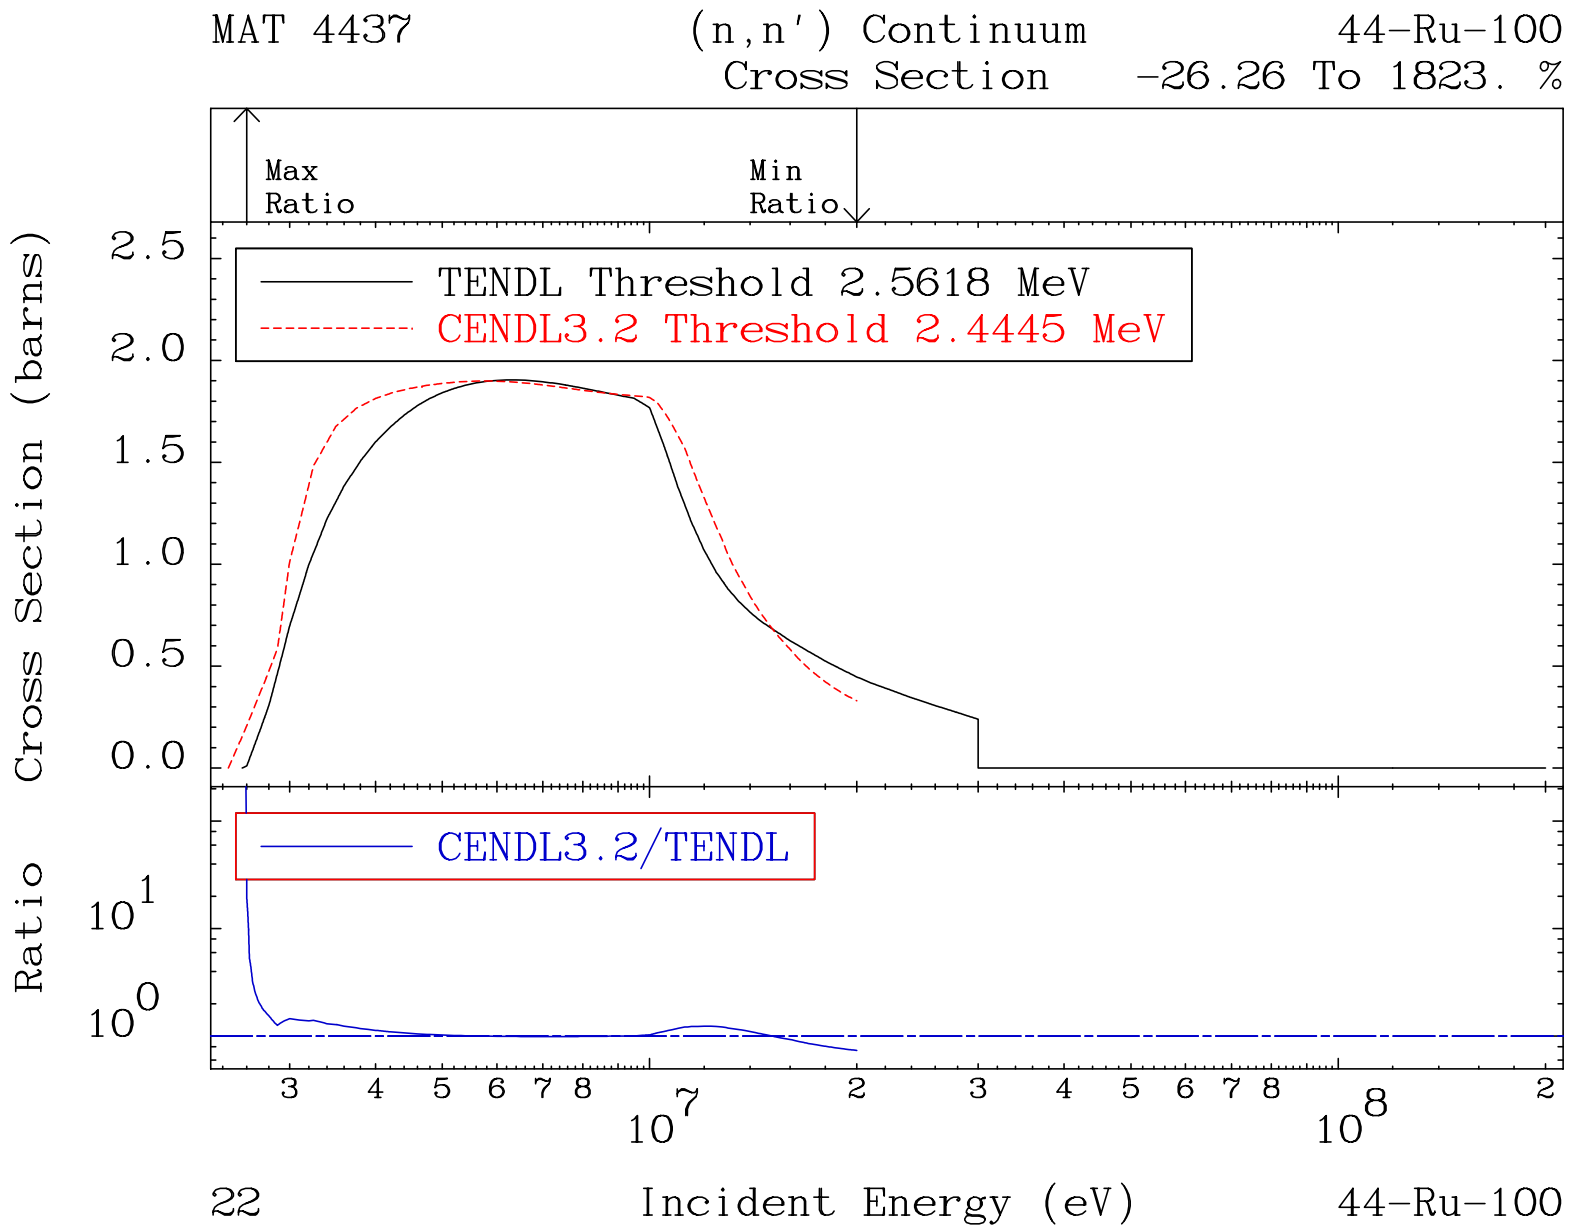
MAT 4437
(n,n') Continuum
Cross Section
44-Ru-100
-26.26 To 1823. %
Max Ratio
Min Ratio
TENDL Threshold 2.5618 MeV
CENDL3.2 Threshold 2.4445 MeV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
2.5
2.0
1.5
1.0
0.5
0.0
10^1
10^0
3 4 5 6 7 8 10^7 2 3 4 5 6 7 8 10^8 2
Incident Energy (eV)
22
44-Ru-100

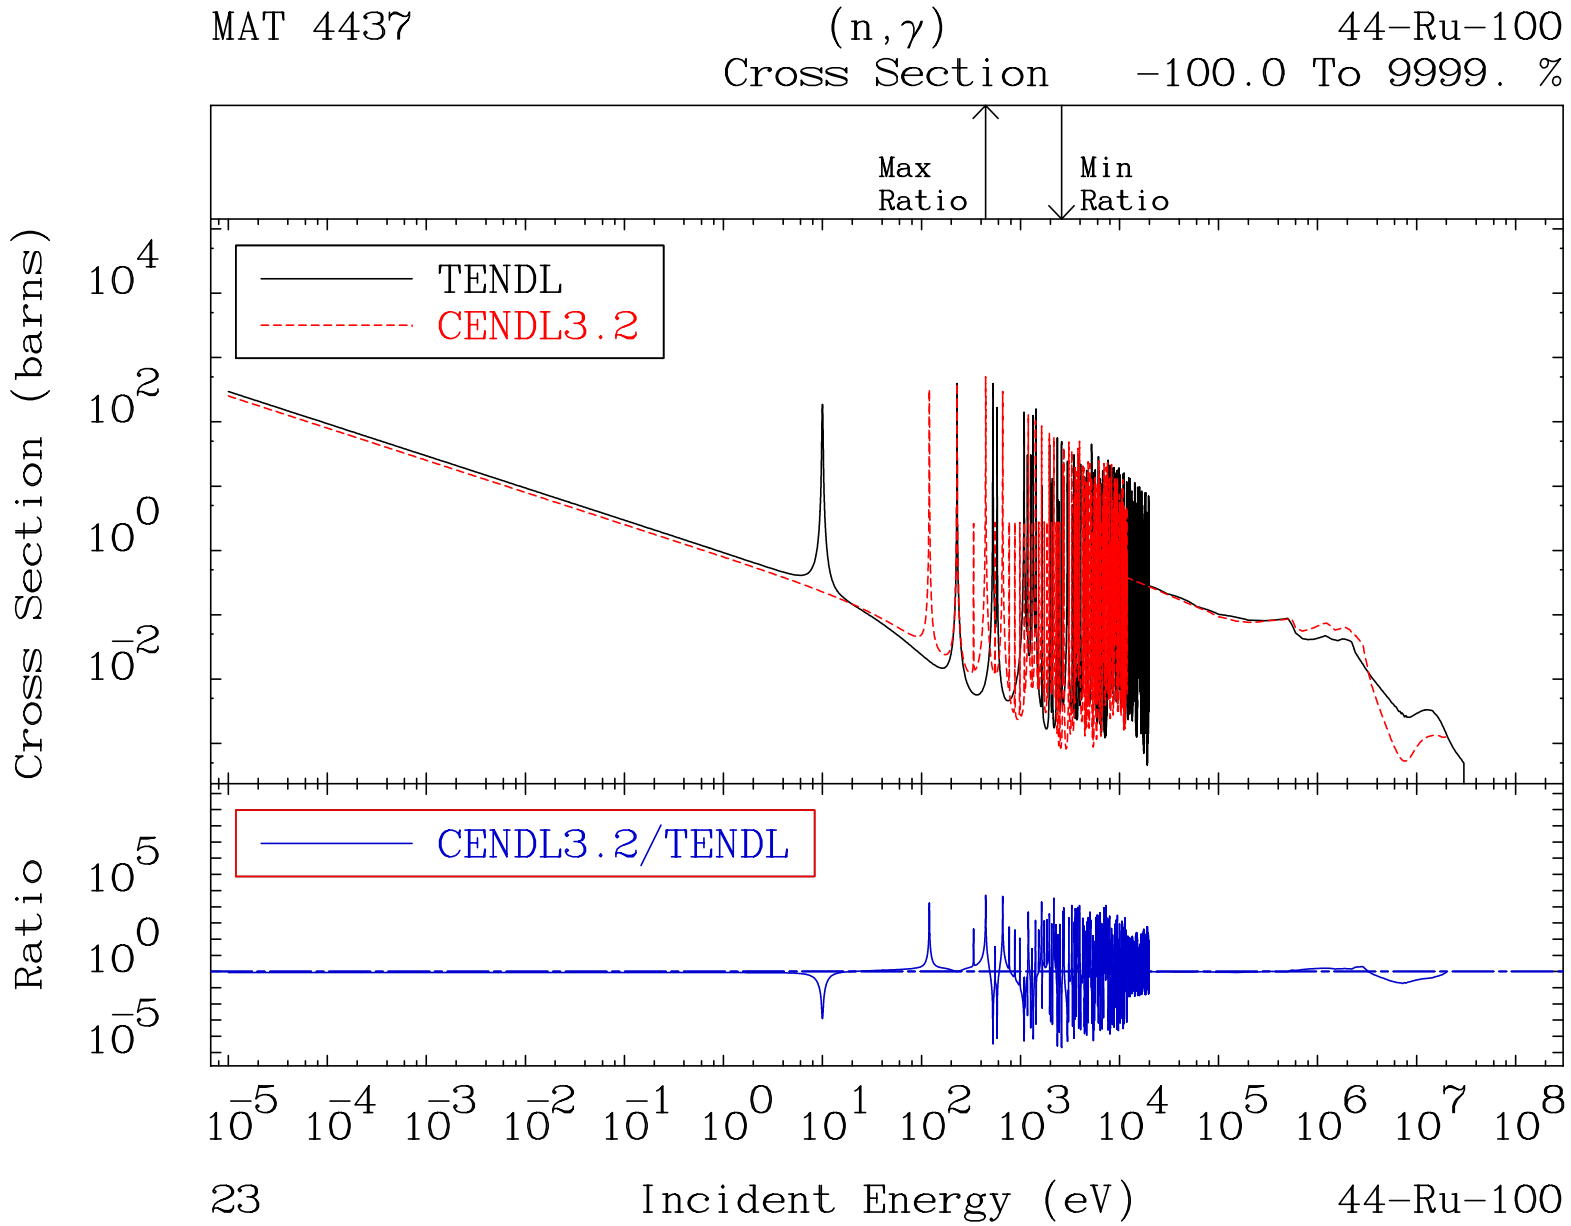
MAT 4437
(n,γ)
Cross Section
44-Ru-100
-100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
23
44-Ru-100

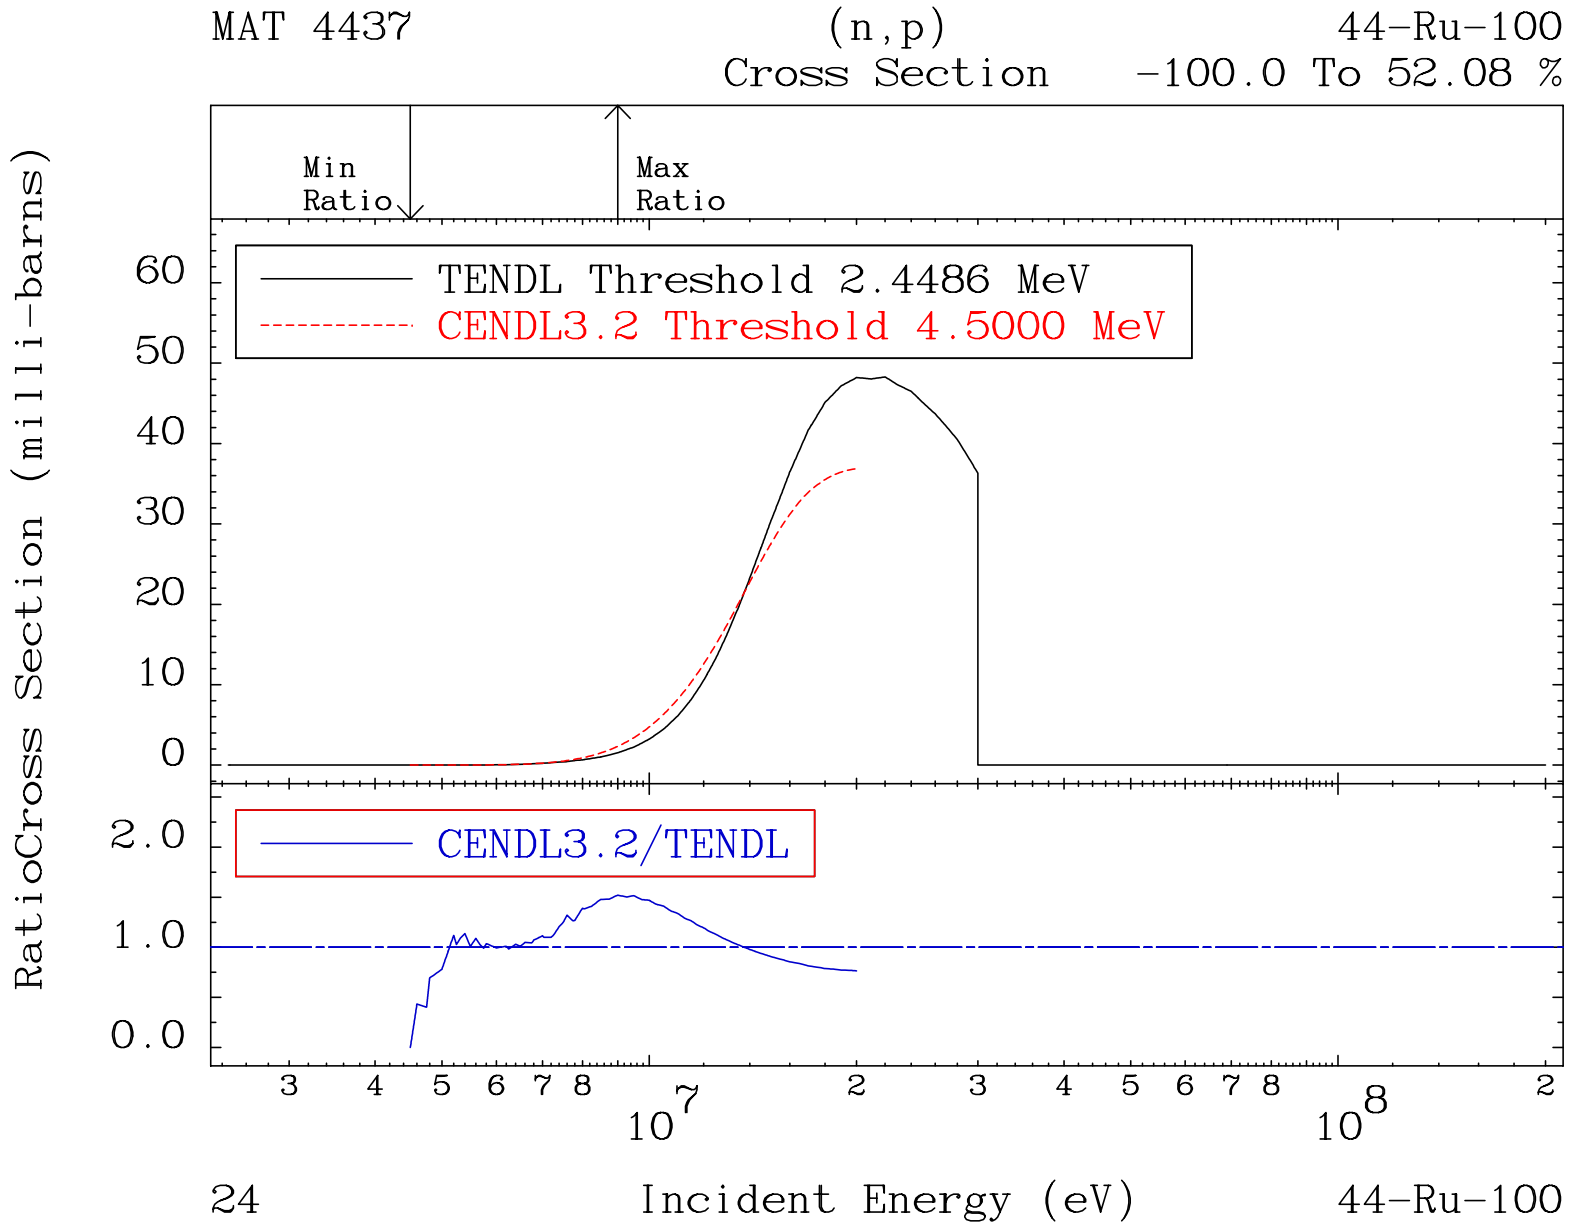
MAT 4437
(n,p)
44-Ru-100
Cross Section
-100.0 To 52.08 %
Min Ratio
Max Ratio
TENDL Threshold 2.4486 MeV
CENDL3.2 Threshold 4.5000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
60
50
40
30
20
10
0
2.0
1.0
0.0
3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
24
Incident Energy (eV)
44-Ru-100

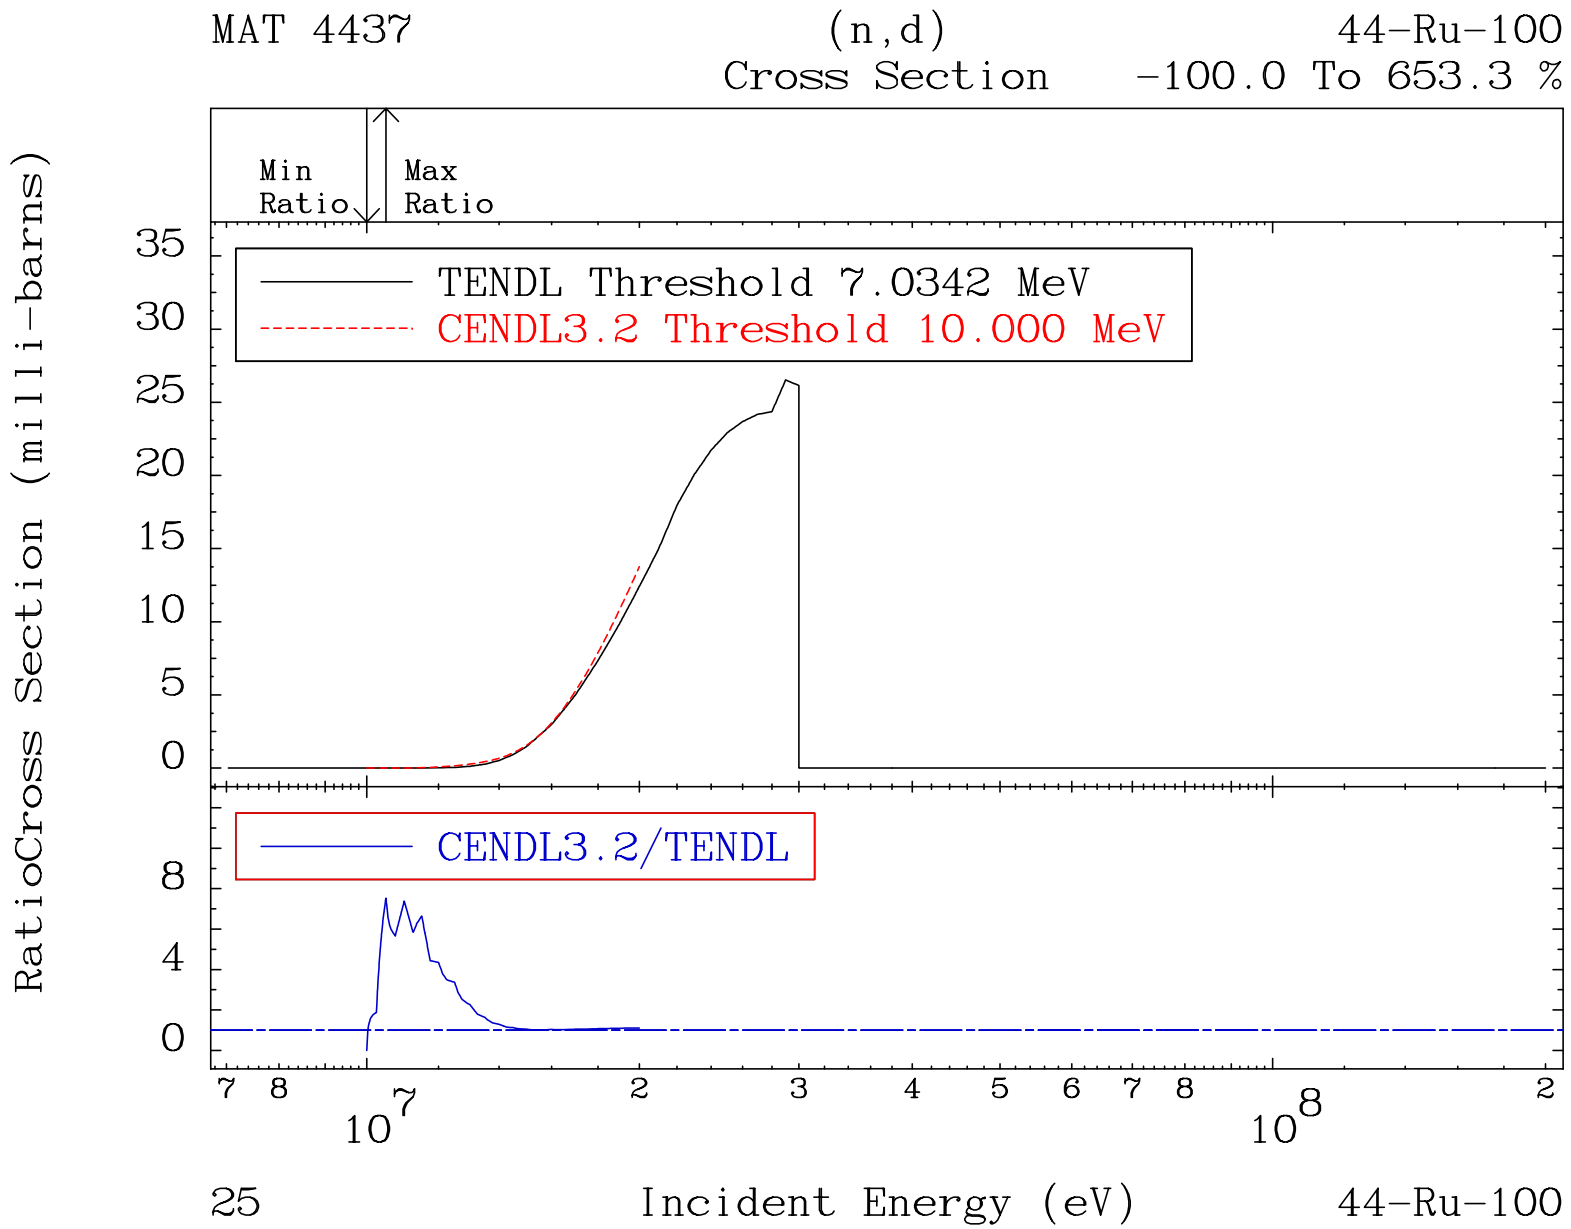
MAT 4437
(n,d)
Cross Section
44-Ru-100
-100.0 To 653.3 %
Min Ratio
Max Ratio
TENDL Threshold 7.0342 MeV
CENDL3.2 Threshold 10.000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
25
44-Ru-100

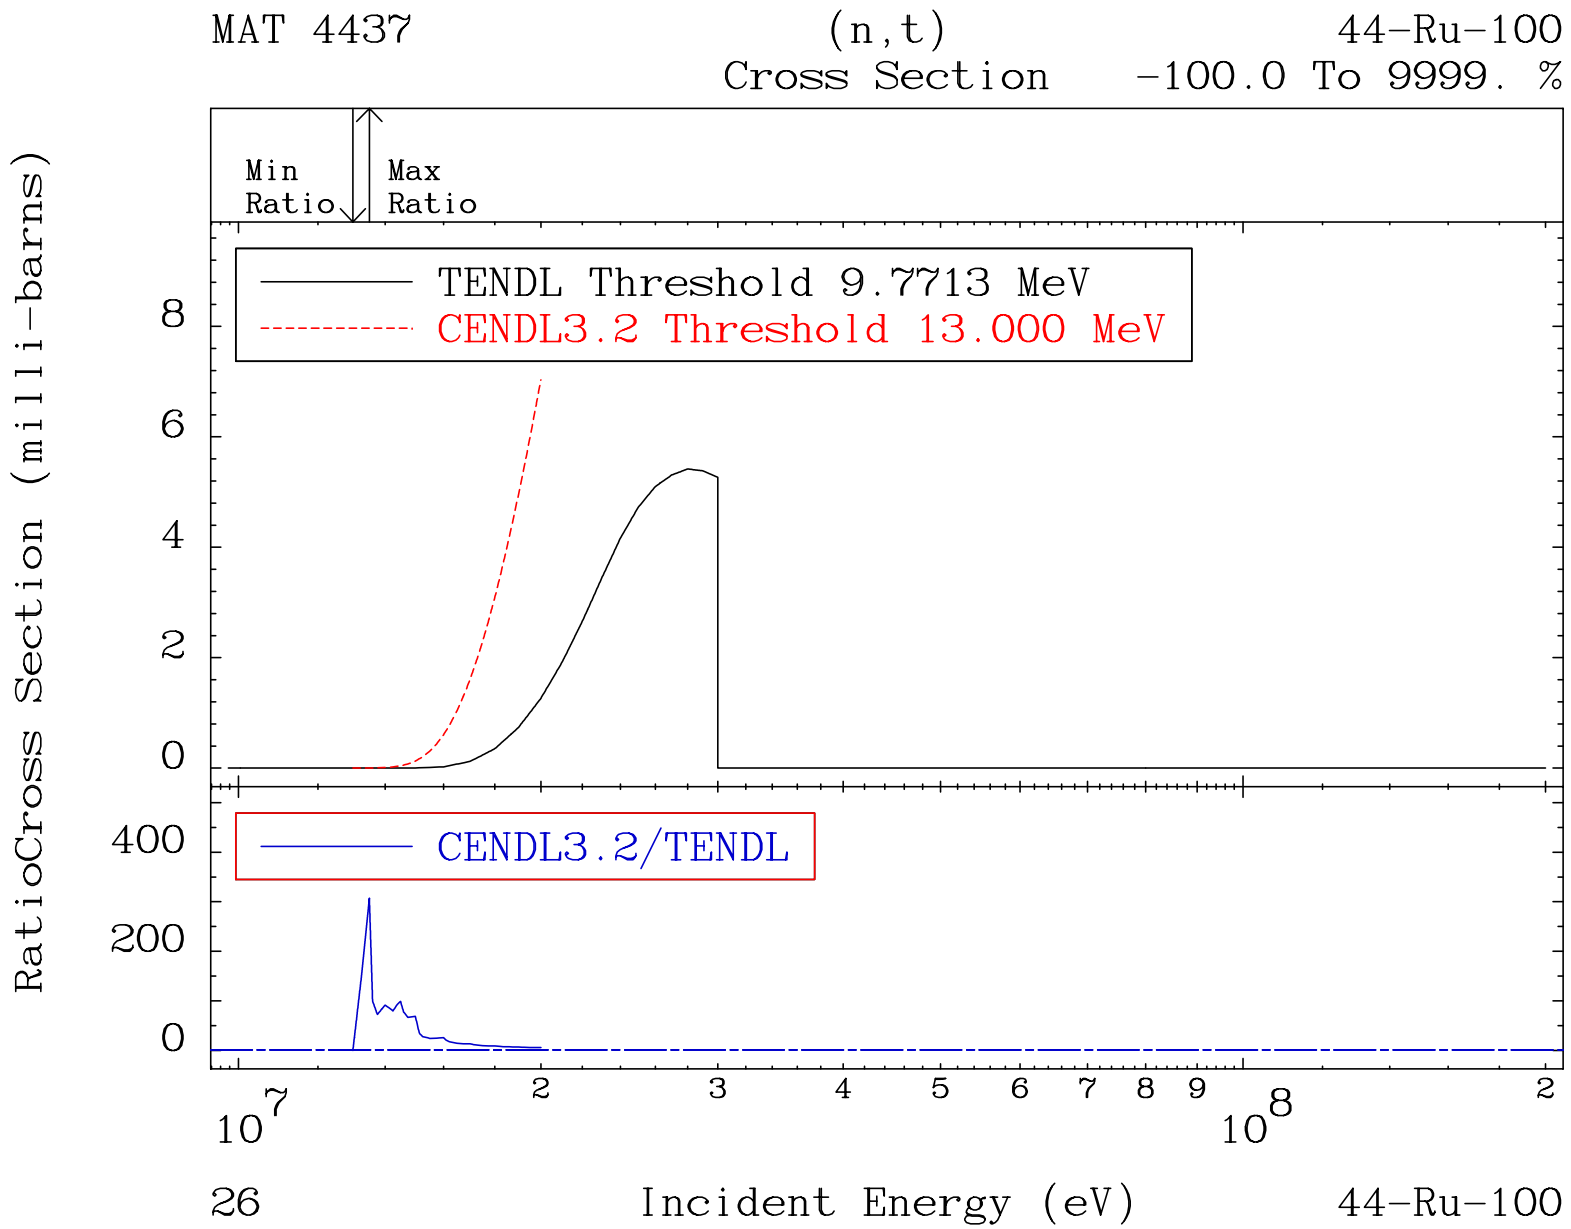
MAT 4437
(n,t)
Cross Section
44-Ru-100
-100.0 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 9.7713 MeV
CENDL3.2 Threshold 13.000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
0
2
4
6
8
0
200
400
10^7
2
3
4
5
6
7
8
9
10^8
2
26
Incident Energy (eV)
44-Ru-100

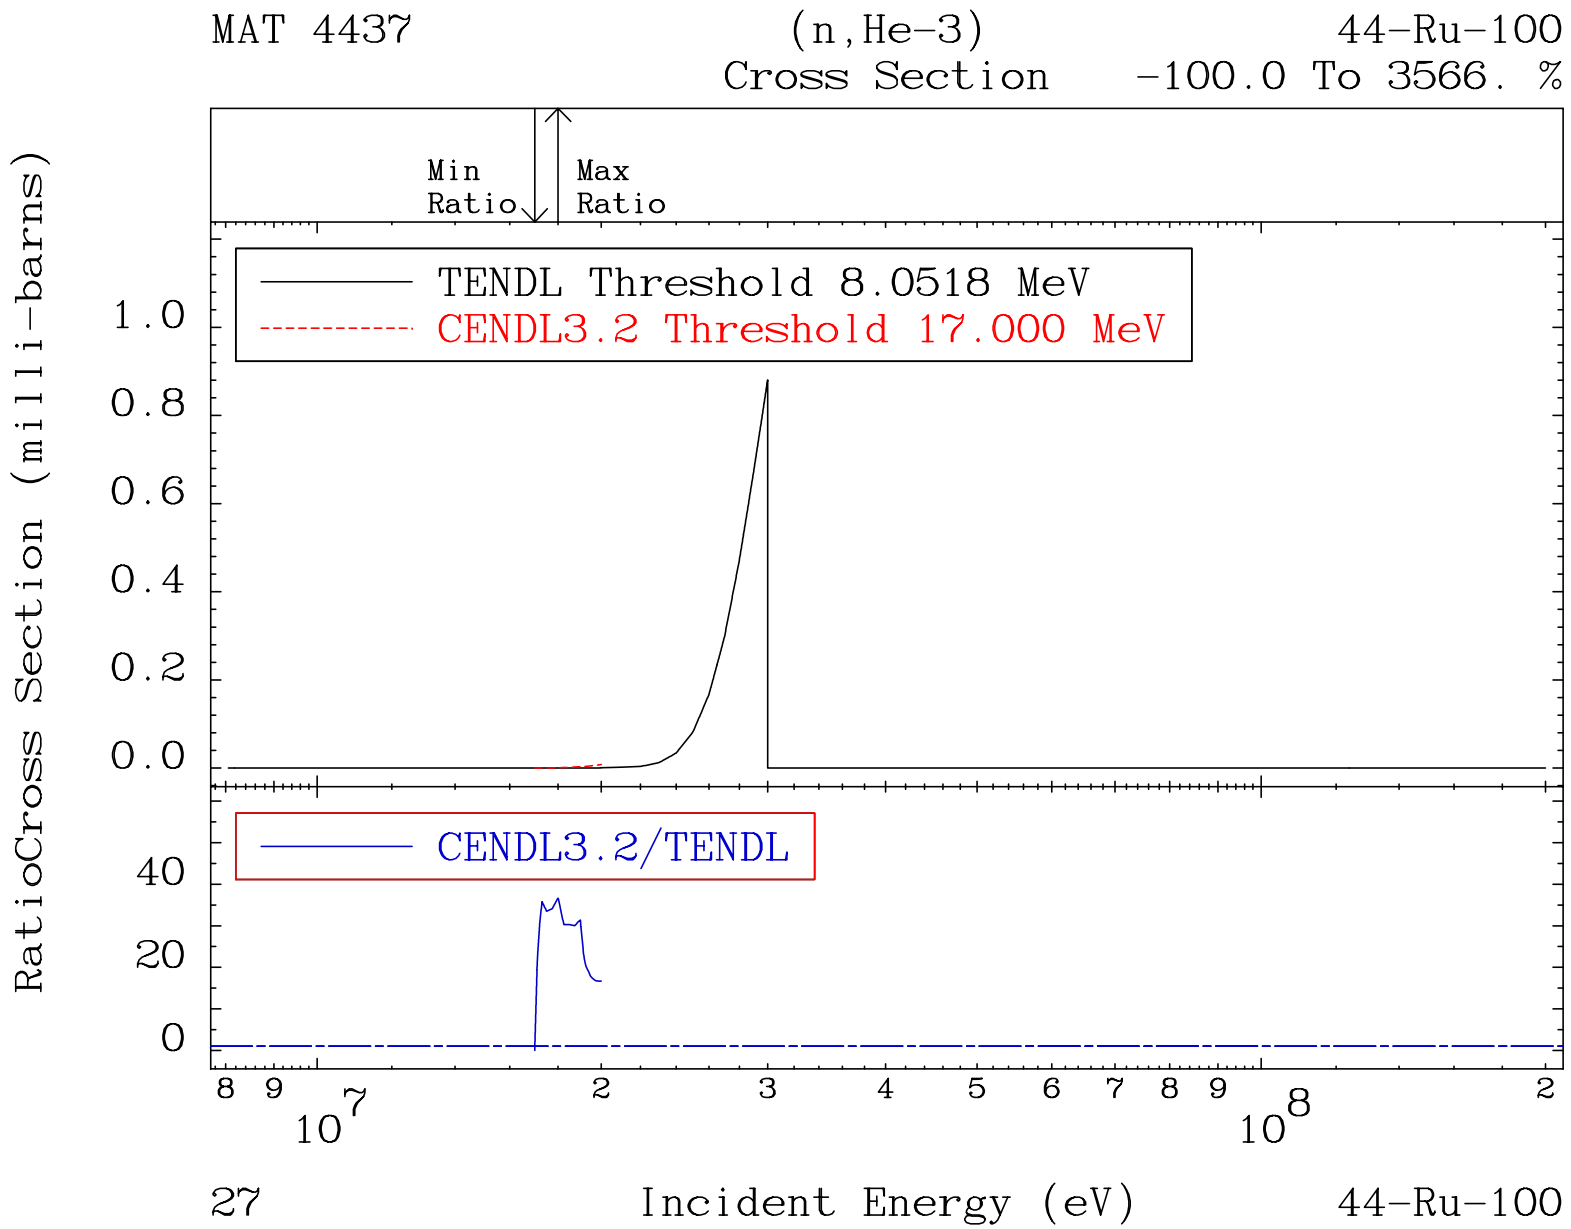
MAT 4437
(n,He-3)
Cross Section
44-Ru-100
-100.0 To 3566. %
Min Ratio
Max Ratio
TENDL Threshold 8.0518 MeV
CENDL3.2 Threshold 17.000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
1.0
0.8
0.6
0.4
0.2
0.0
40
20
0
8 9 10^7 2 3 4 5 6 7 8 9 10^8 2
27
Incident Energy (eV)
44-Ru-100

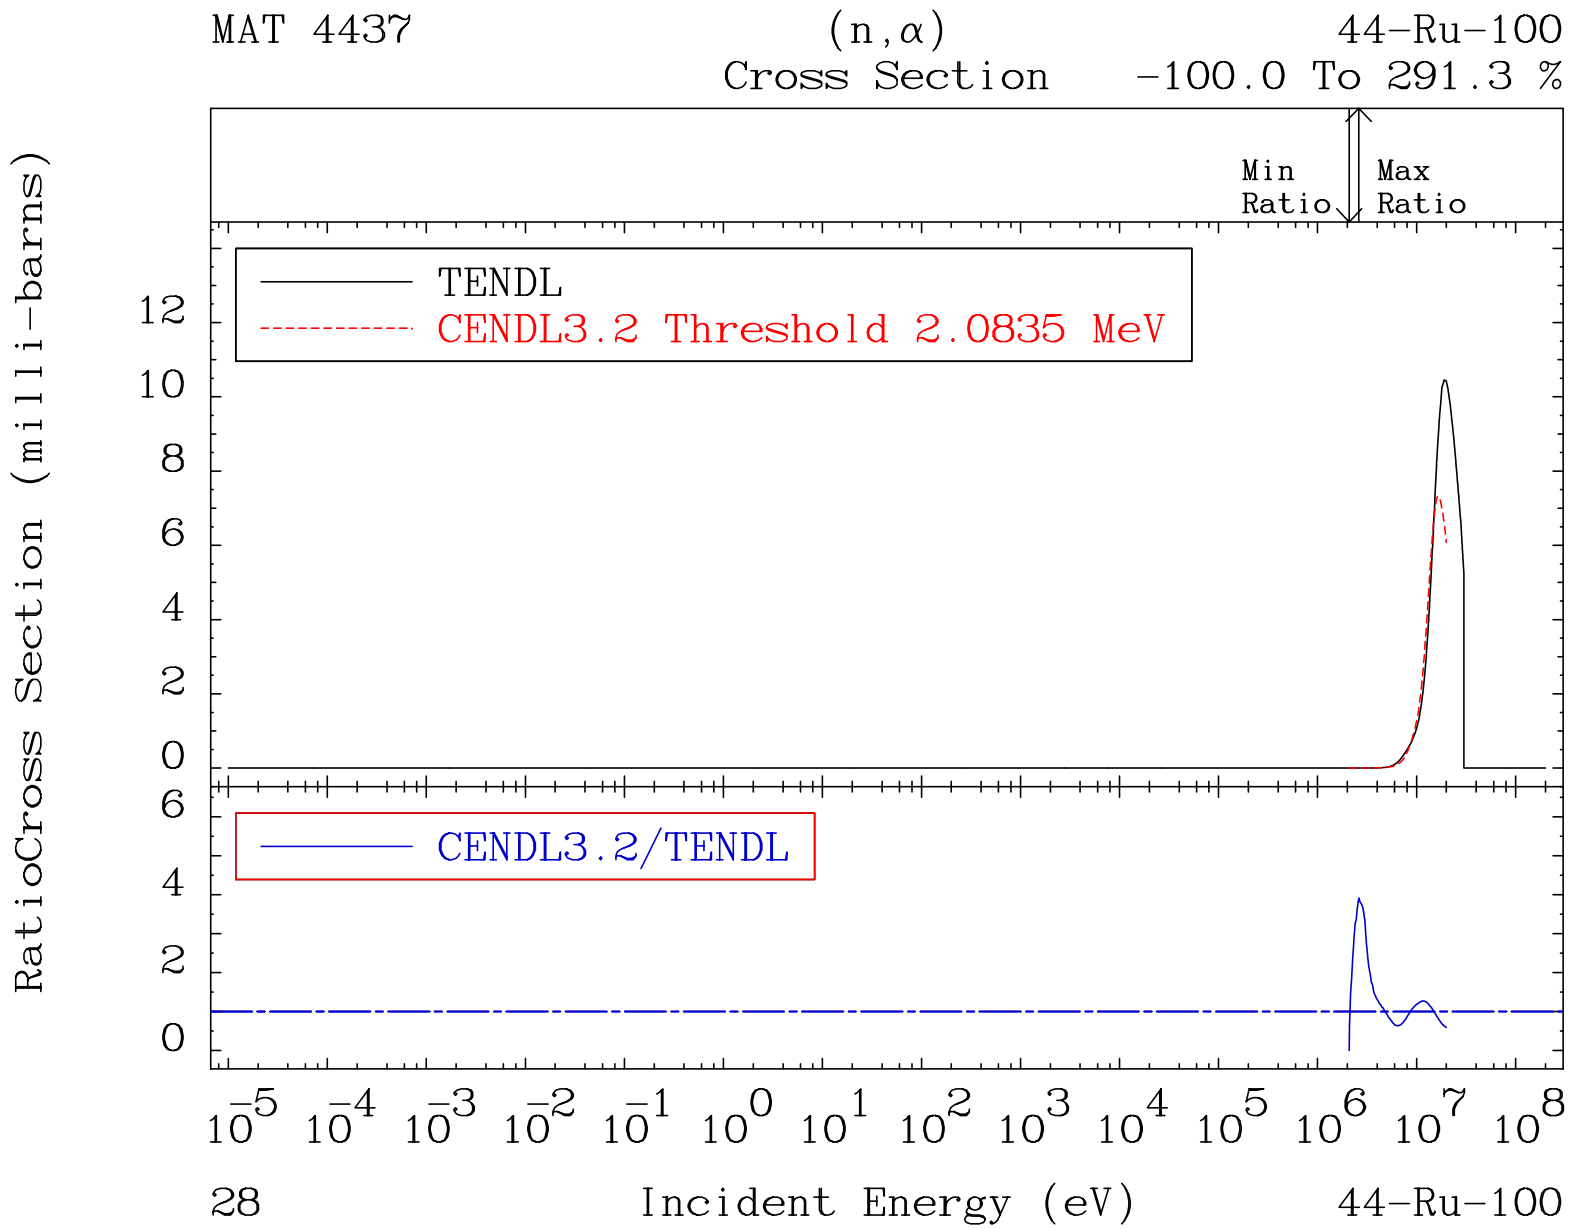
MAT 4437
(n,α)
Cross Section
44-Ru-100
-100.0 To 291.3 %
Min Ratio
Max Ratio
TENDL
CENDL3.2 Threshold 2.0835 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
28
44-Ru-100

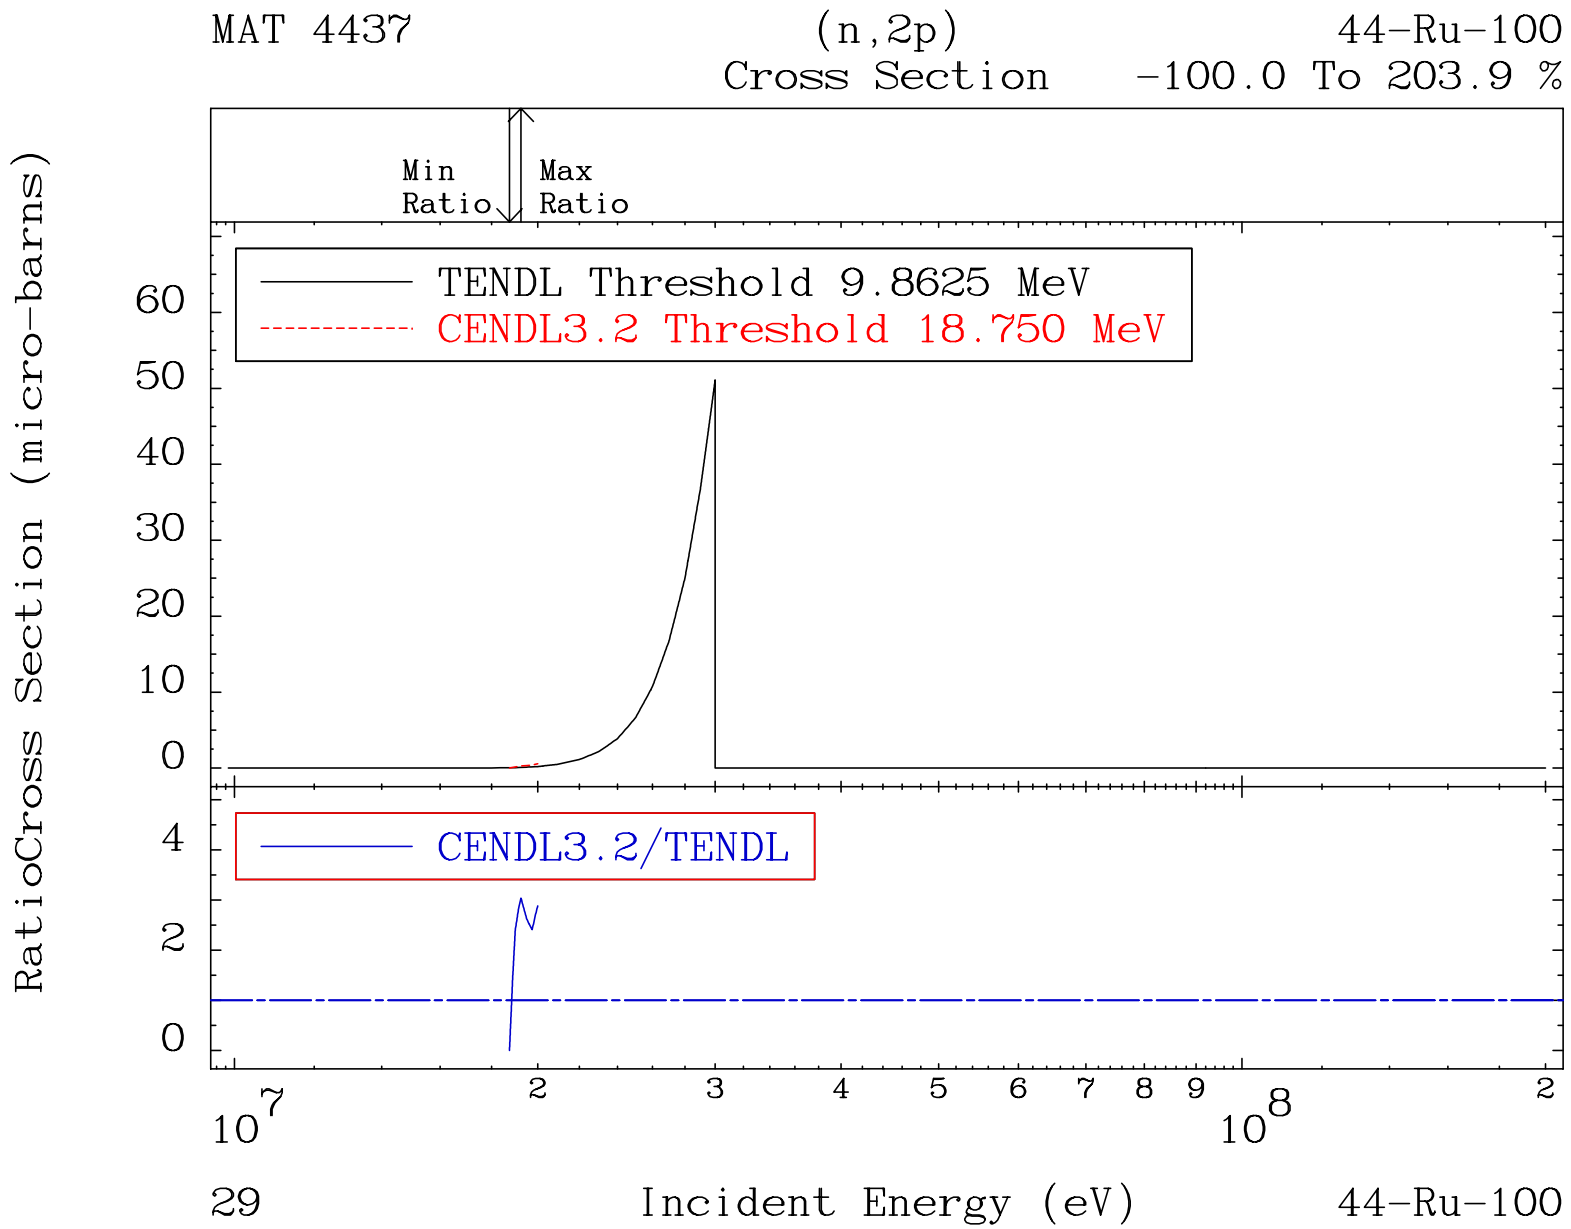
MAT 4437
(n,2p)
Cross Section
44-Ru-100
-100.0 To 203.9 %
Min Ratio
Max Ratio
TENDL Threshold 9.8625 MeV
CENDL3.2 Threshold 18.750 MeV
CENDL3.2/TENDL
RatioCross Section (micro-barns)
60
50
40
30
20
10
0
4
2
0
10^7
2
3
4
5
6
7
8
9
10^8
2
29
Incident Energy (eV)
44-Ru-100

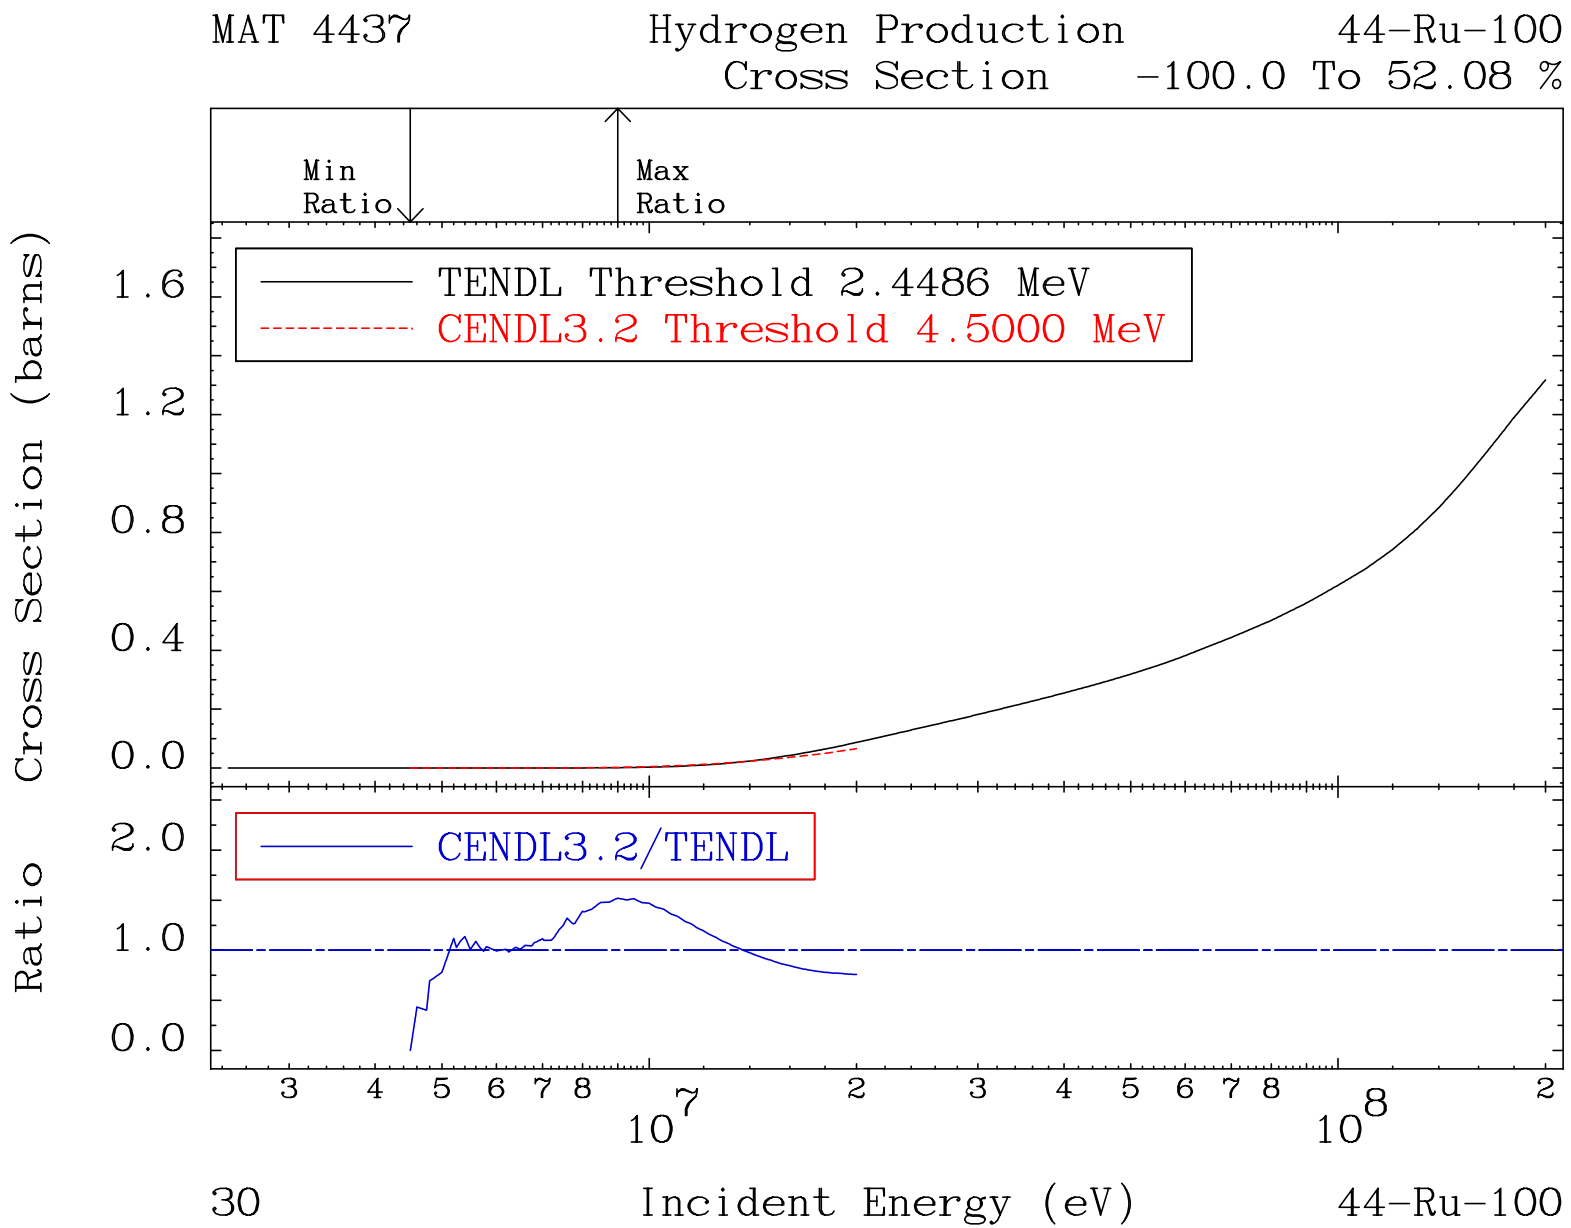
MAT 4437
Hydrogen Production
44-Ru-100
Cross Section -100.0 To 52.08 %
Min Ratio
Max Ratio
TENDL Threshold 2.4486 MeV
CENDL3.2 Threshold 4.5000 MeV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
1.6
1.2
0.8
0.4
0.0
2.0
1.0
0.0
3 4 5 6 7 8 10^7 2 3 4 5 6 7 8 10^8 2
30
Incident Energy (eV)
44-Ru-100

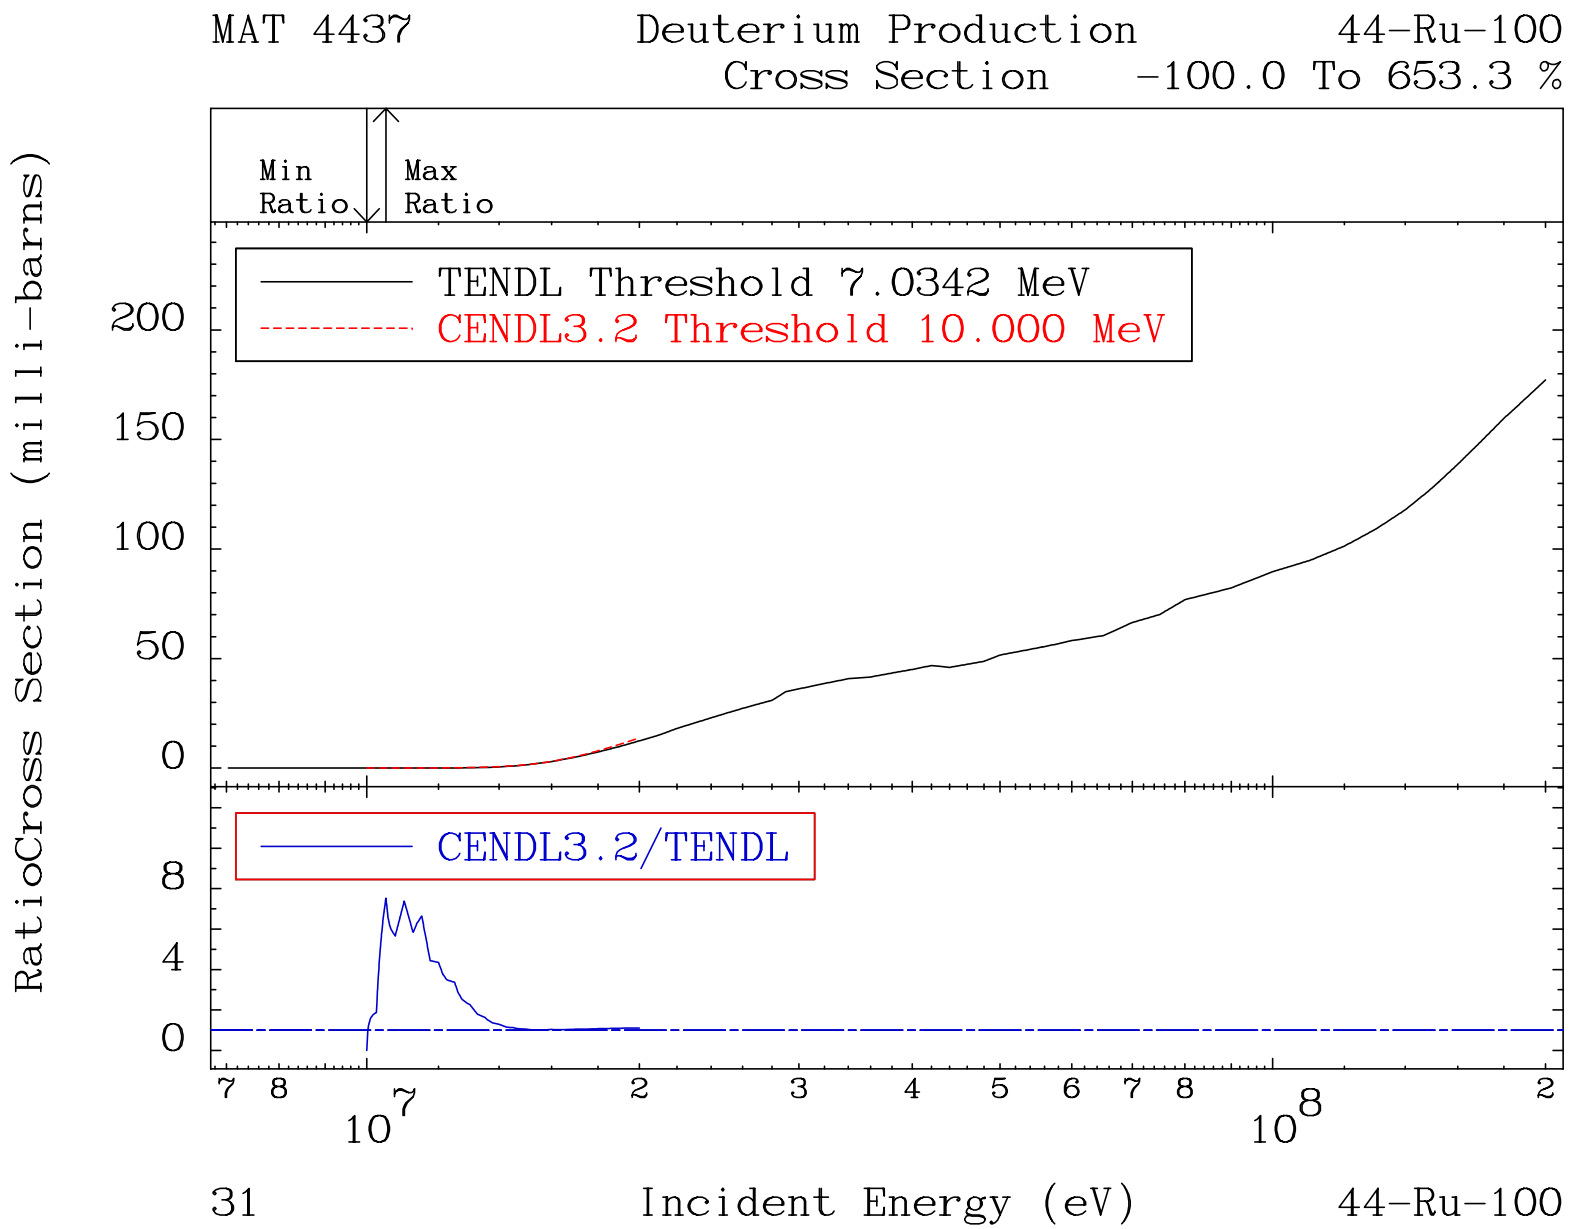
MAT 4437
Deuterium Production
44-Ru-100
Cross Section
-100.0 To 653.3 %
Min Ratio
Max Ratio
TENDL Threshold 7.0342 MeV
CENDL3.2 Threshold 10.000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
200
150
100
50
0
8
4
0
7 8
10^7
2 3 4 5 6 7 8
10^8
2
31
Incident Energy (eV)
44-Ru-100

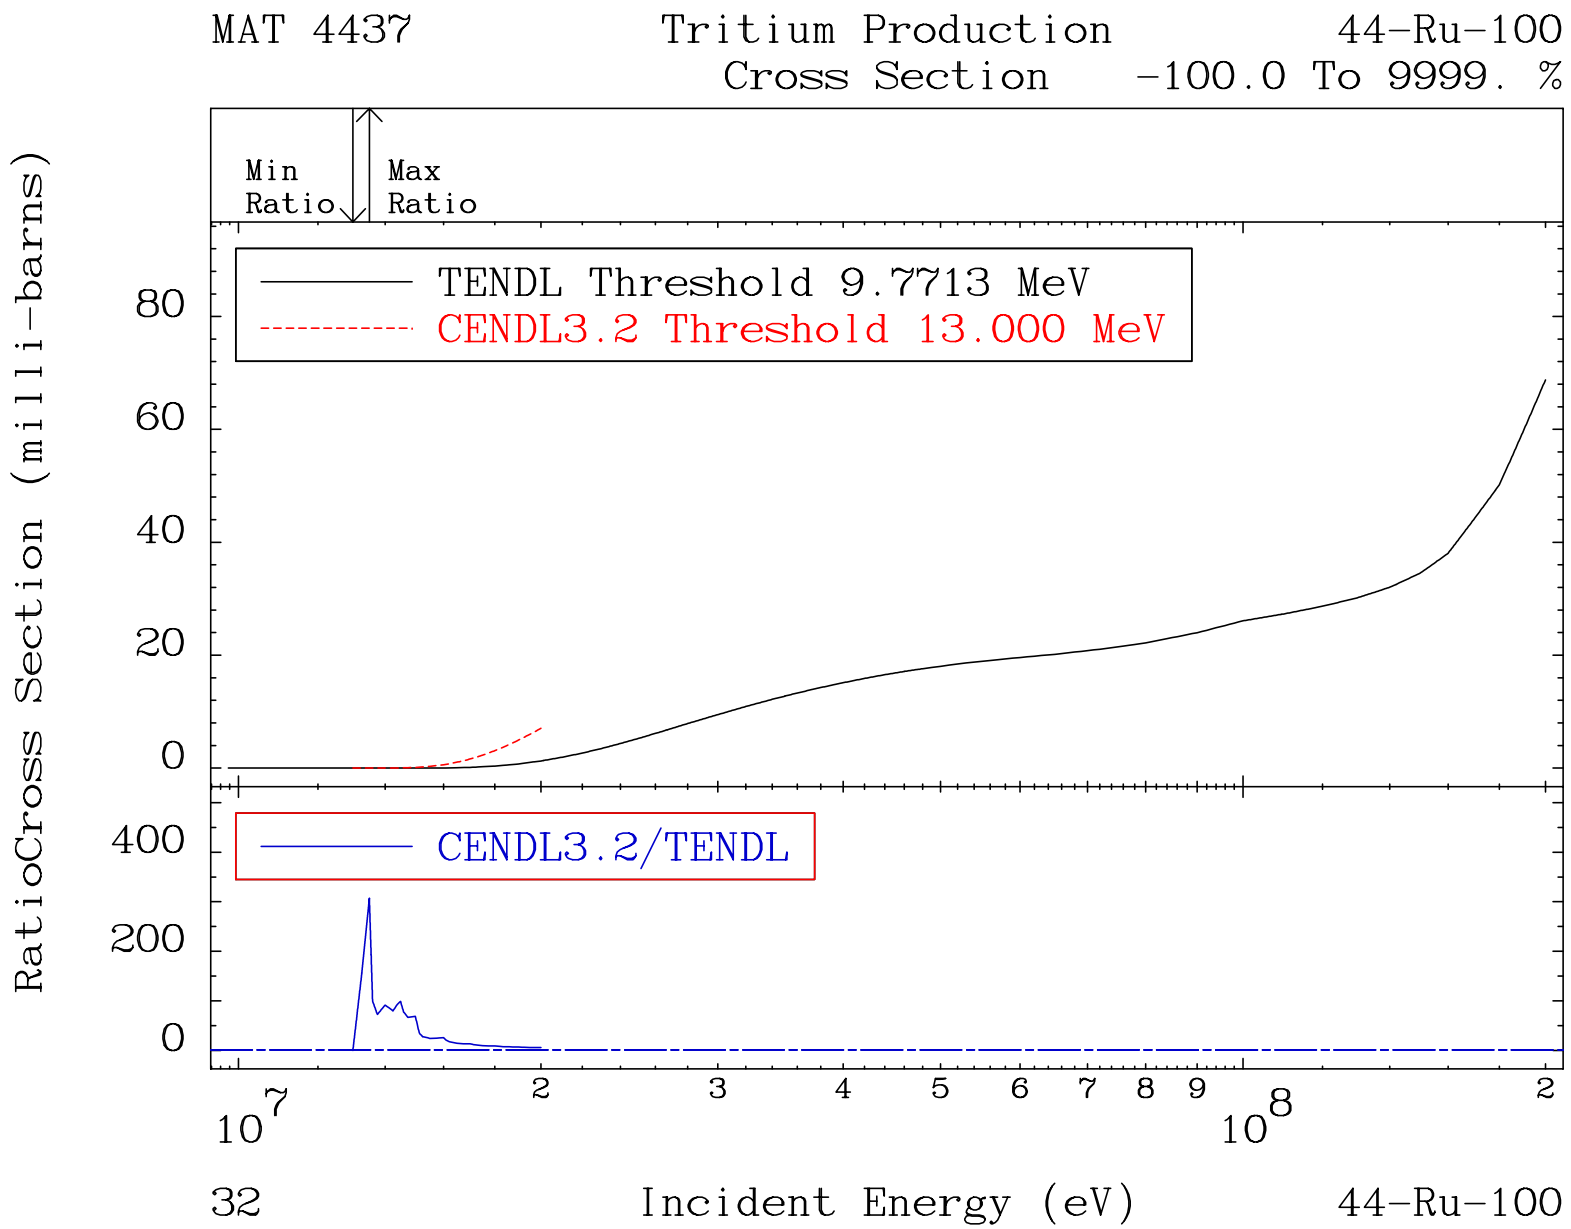
MAT 4437
Tritium Production
44-Ru-100
Cross Section
-100.0 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 9.7713 MeV
CENDL3.2 Threshold 13.000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
80
60
40
20
0
400
200
0
10^7
2
3
4
5
6
7
8
9
10^8
2
32
Incident Energy (eV)
44-Ru-100

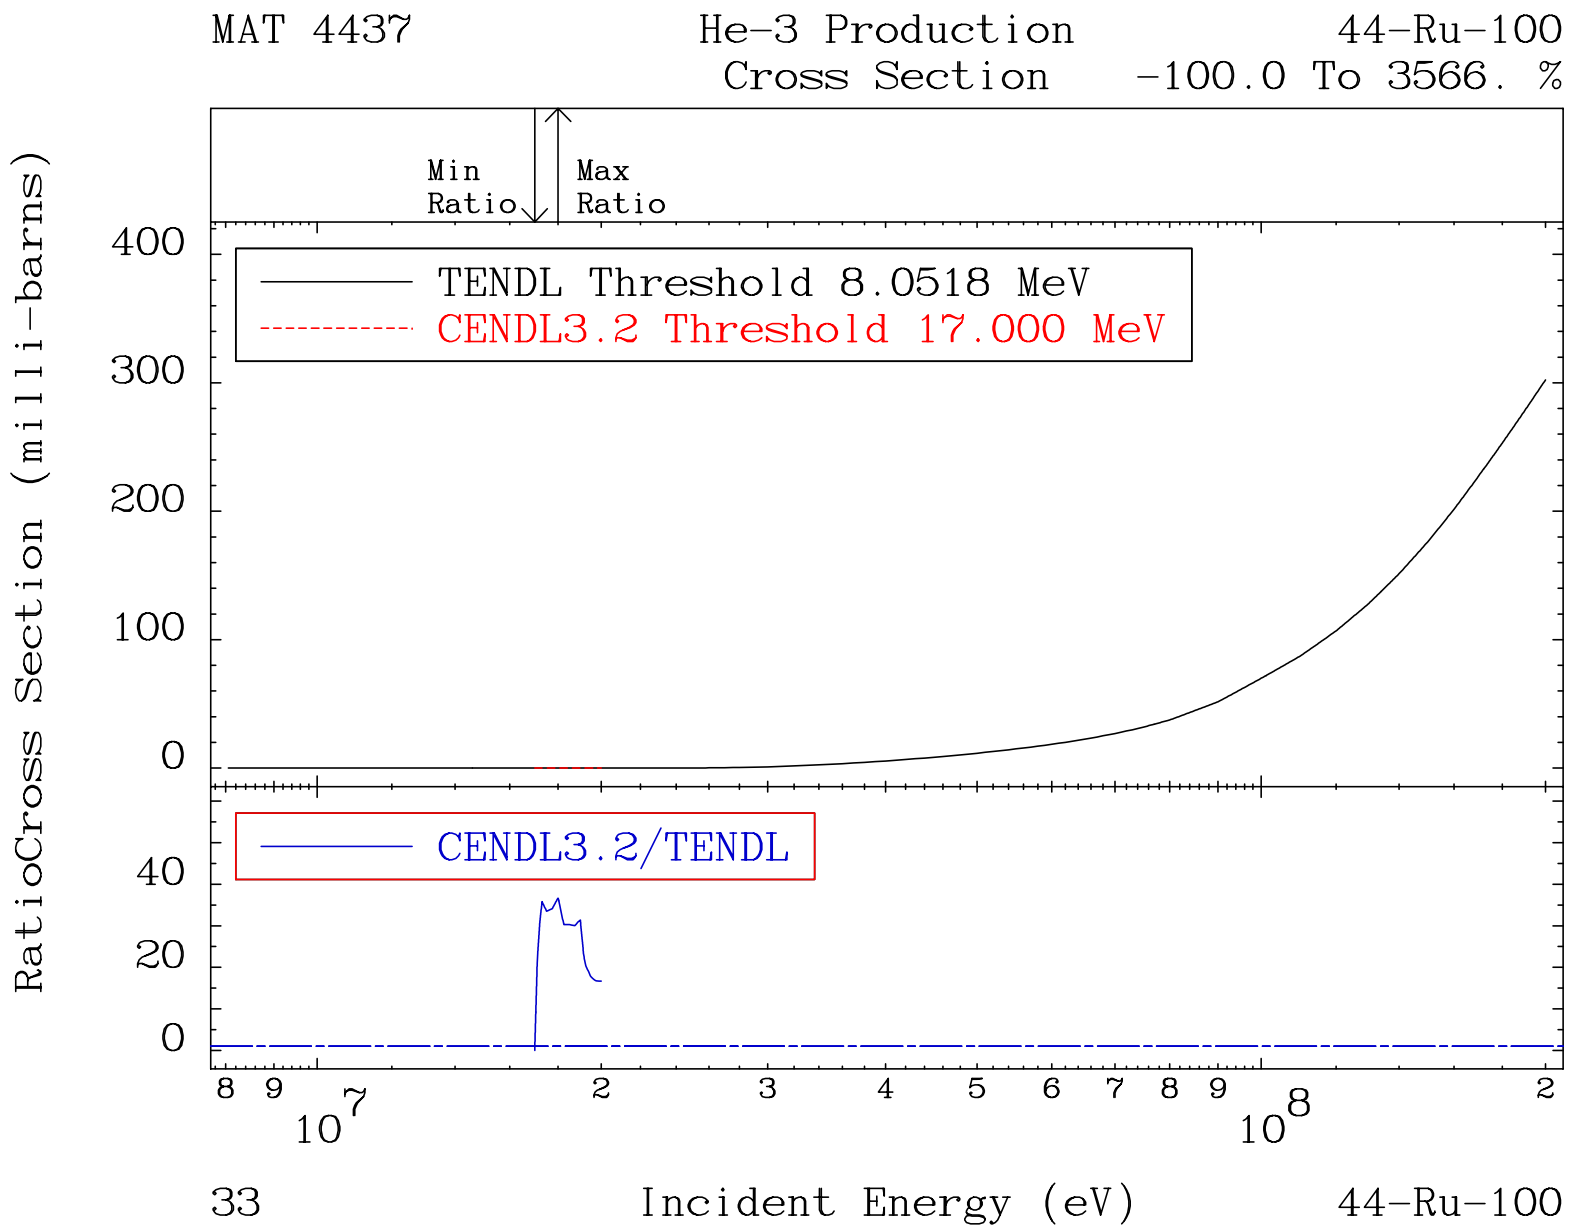
MAT 4437
He-3 Production
Cross Section
44-Ru-100
-100.0 To 3566. %
Min Ratio
Max Ratio
TENDL Threshold 8.0518 MeV
CENDL3.2 Threshold 17.000 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
400
300
200
100
0
40
20
0
8 9 10^7 2 3 4 5 6 7 8 9 10^8 2
33
Incident Energy (eV)
44-Ru-100

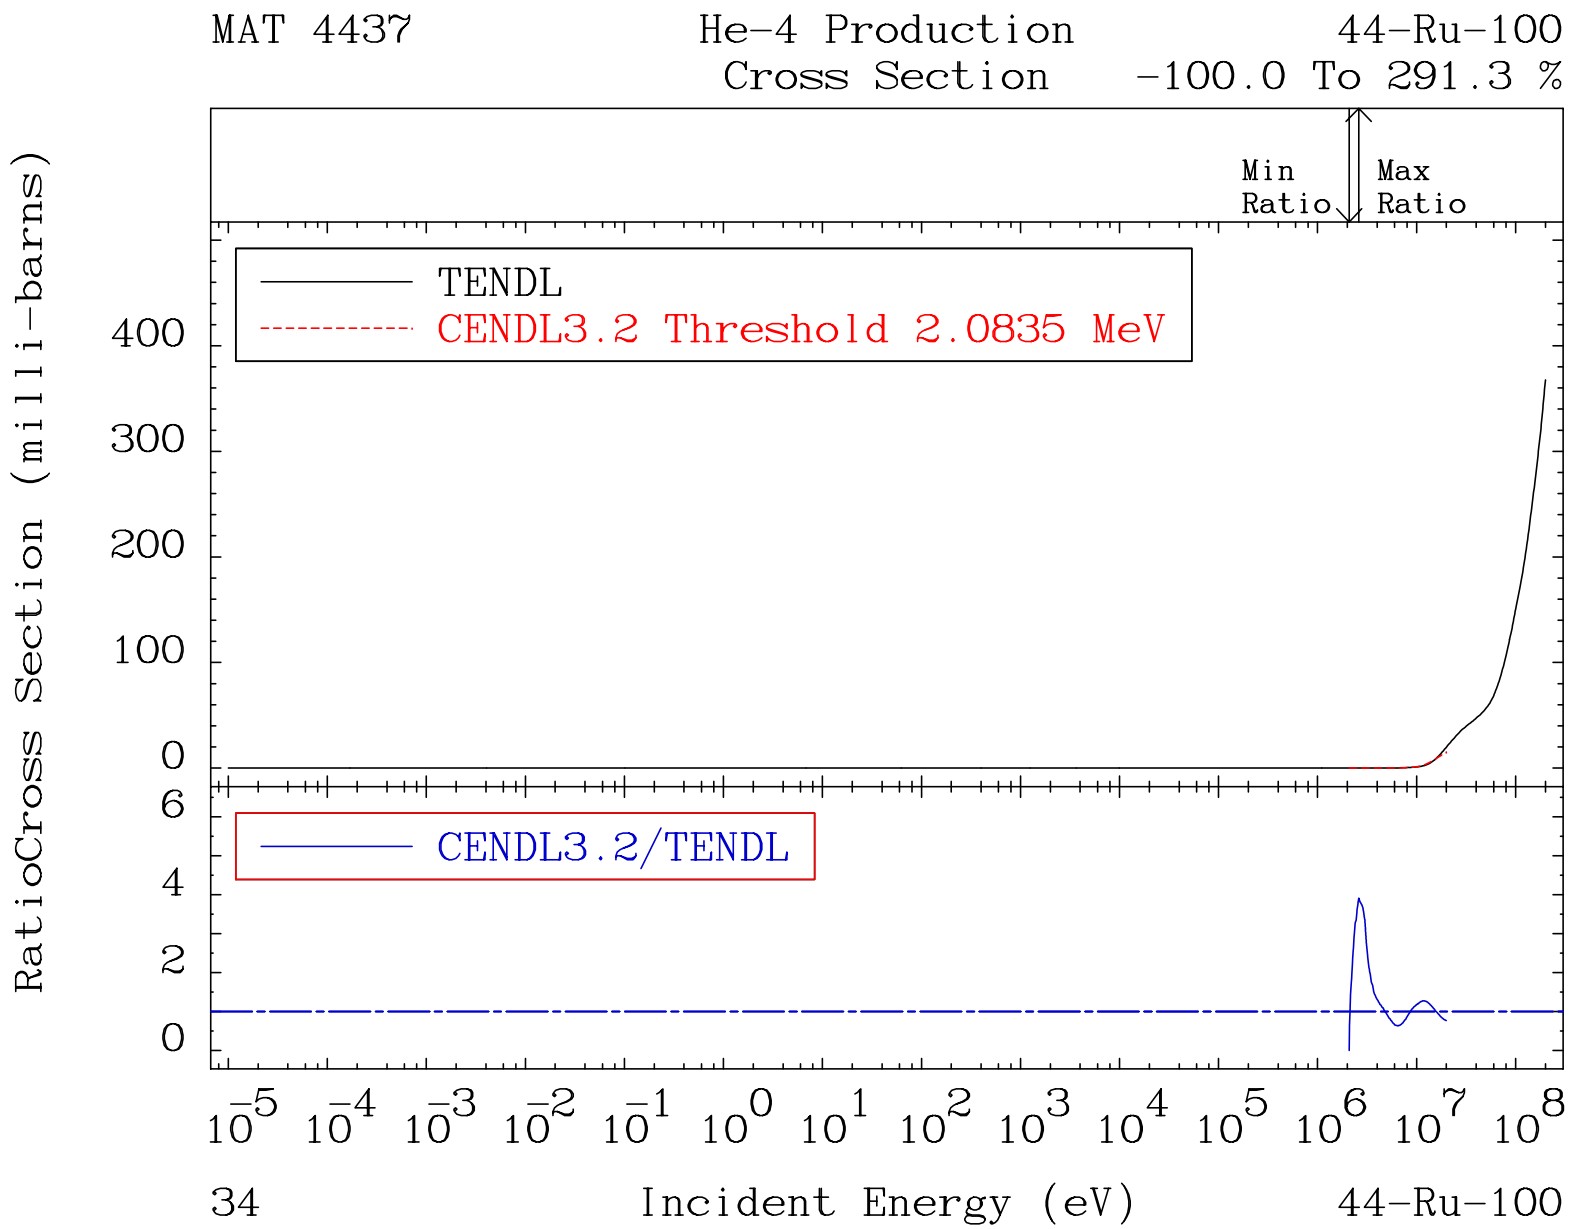
MAT 4437
He-4 Production
Cross Section
44-Ru-100
-100.0 To 291.3 %
Min Ratio
Max Ratio
TENDL
CENDL3.2 Threshold 2.0835 MeV
CENDL3.2/TENDL
RatioCross Section (milli-barns)
400
300
200
100
0
6
4
2
0
10^-5 10^-4 10^-3 10^-2 10^-1 10^0 10^1 10^2 10^3 10^4 10^5 10^6 10^7 10^8
34
Incident Energy (eV)
44-Ru-100

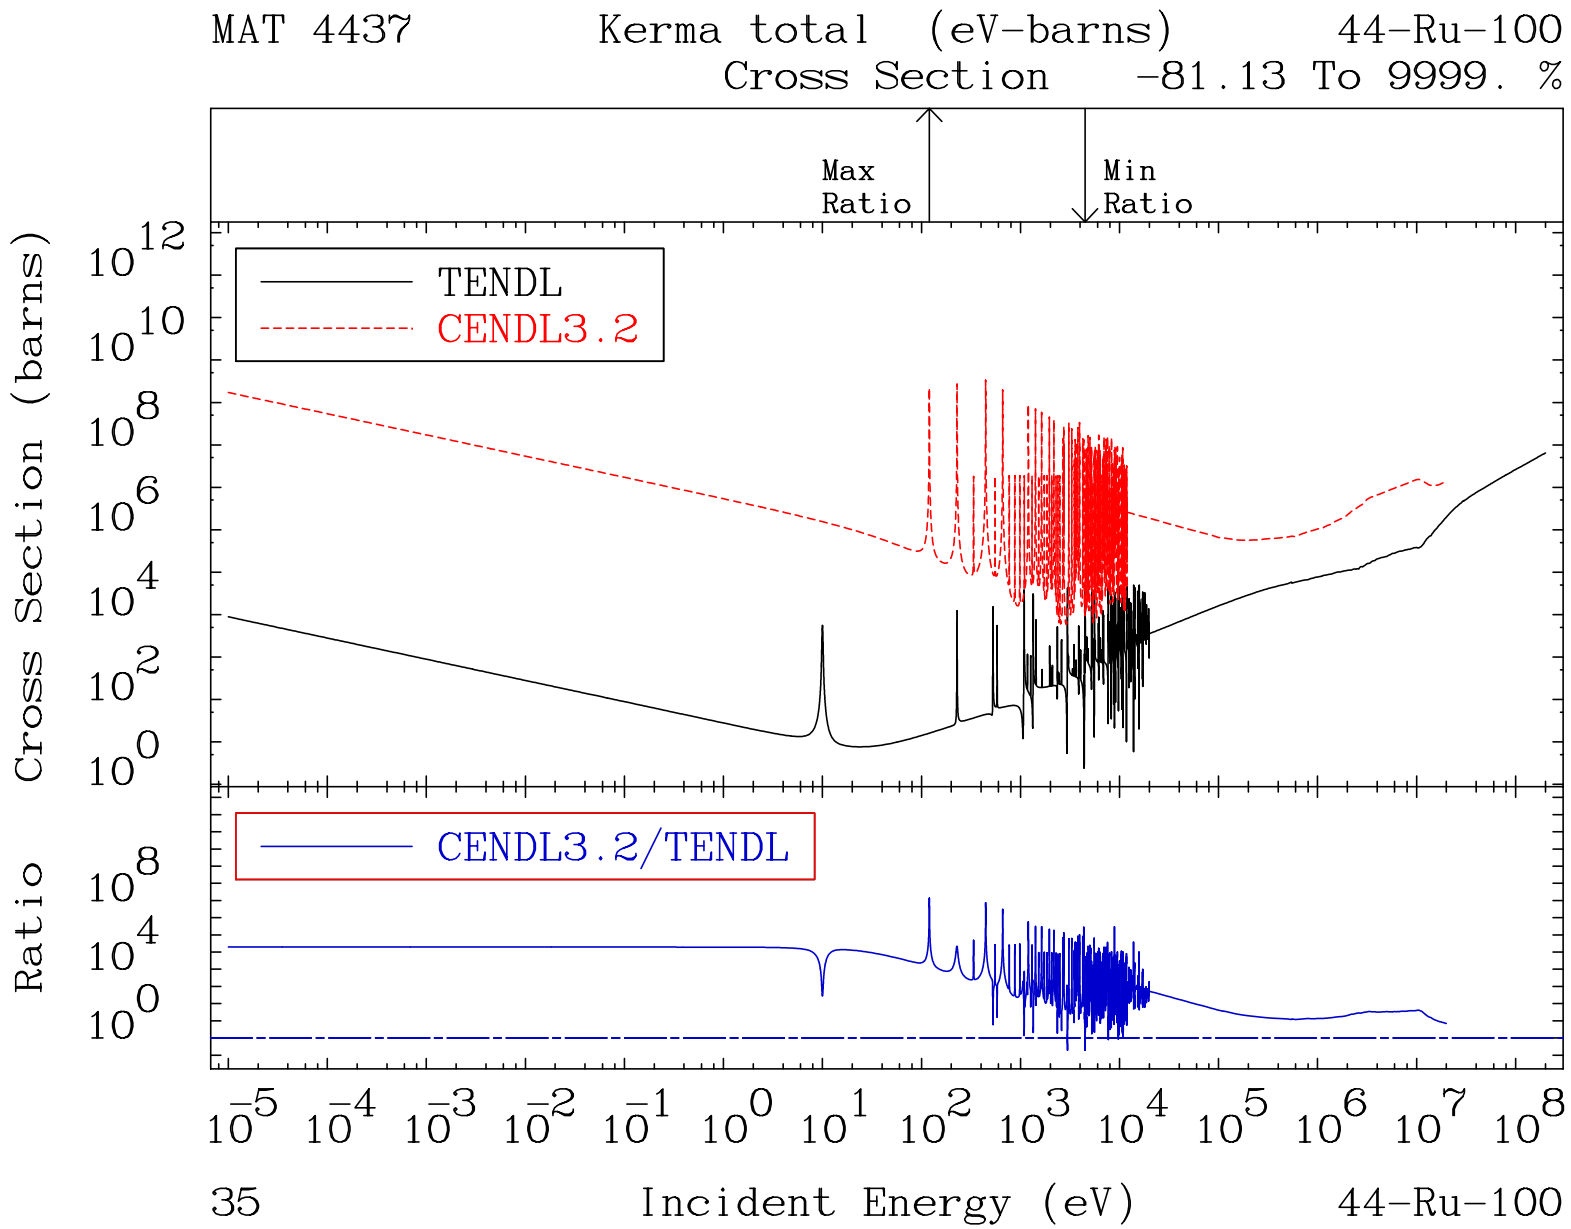
MAT 4437
Kerma total (eV-barns)
44-Ru-100
Cross Section -81.13 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
Cross Section (barns)
CENDL3.2/TENDL
Ratio
Incident Energy (eV)
35
44-Ru-100

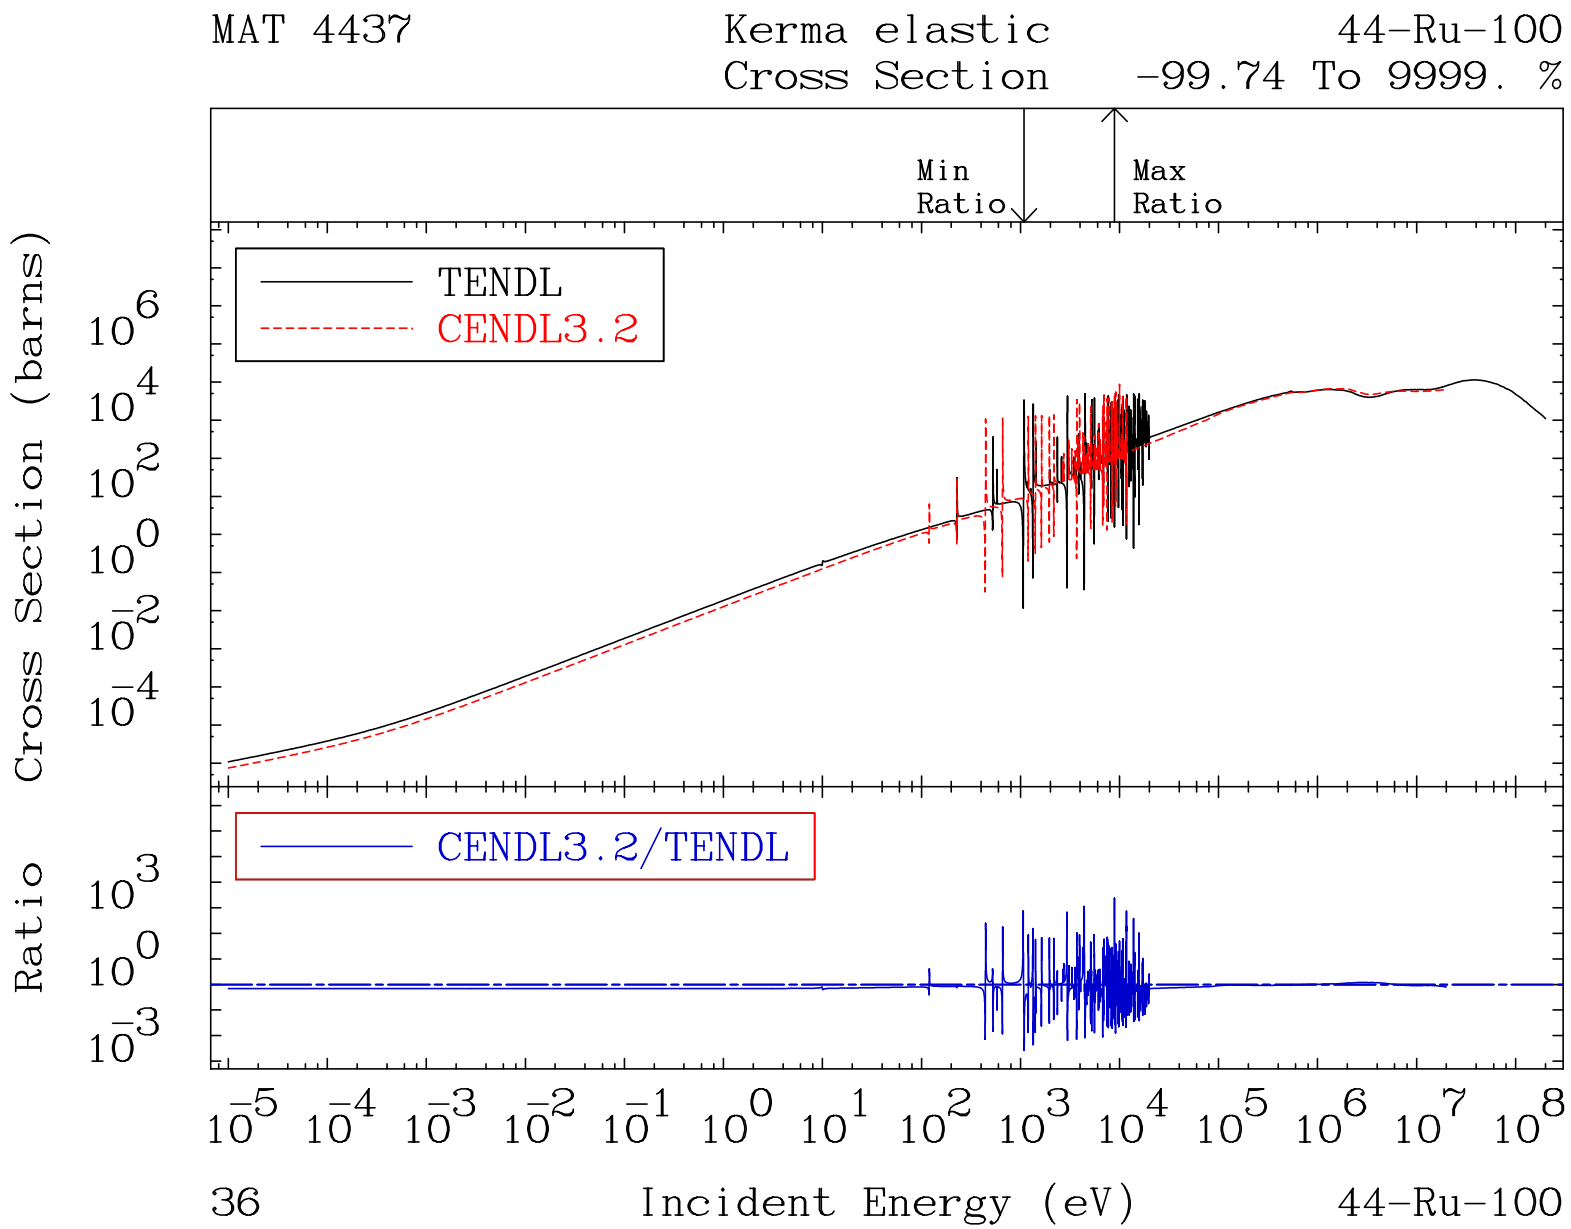
MAT 4437
Kerma elastic
Cross Section
44-Ru-100
-99.74 To 9999. %
Min Ratio
Max Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
36
44-Ru-100

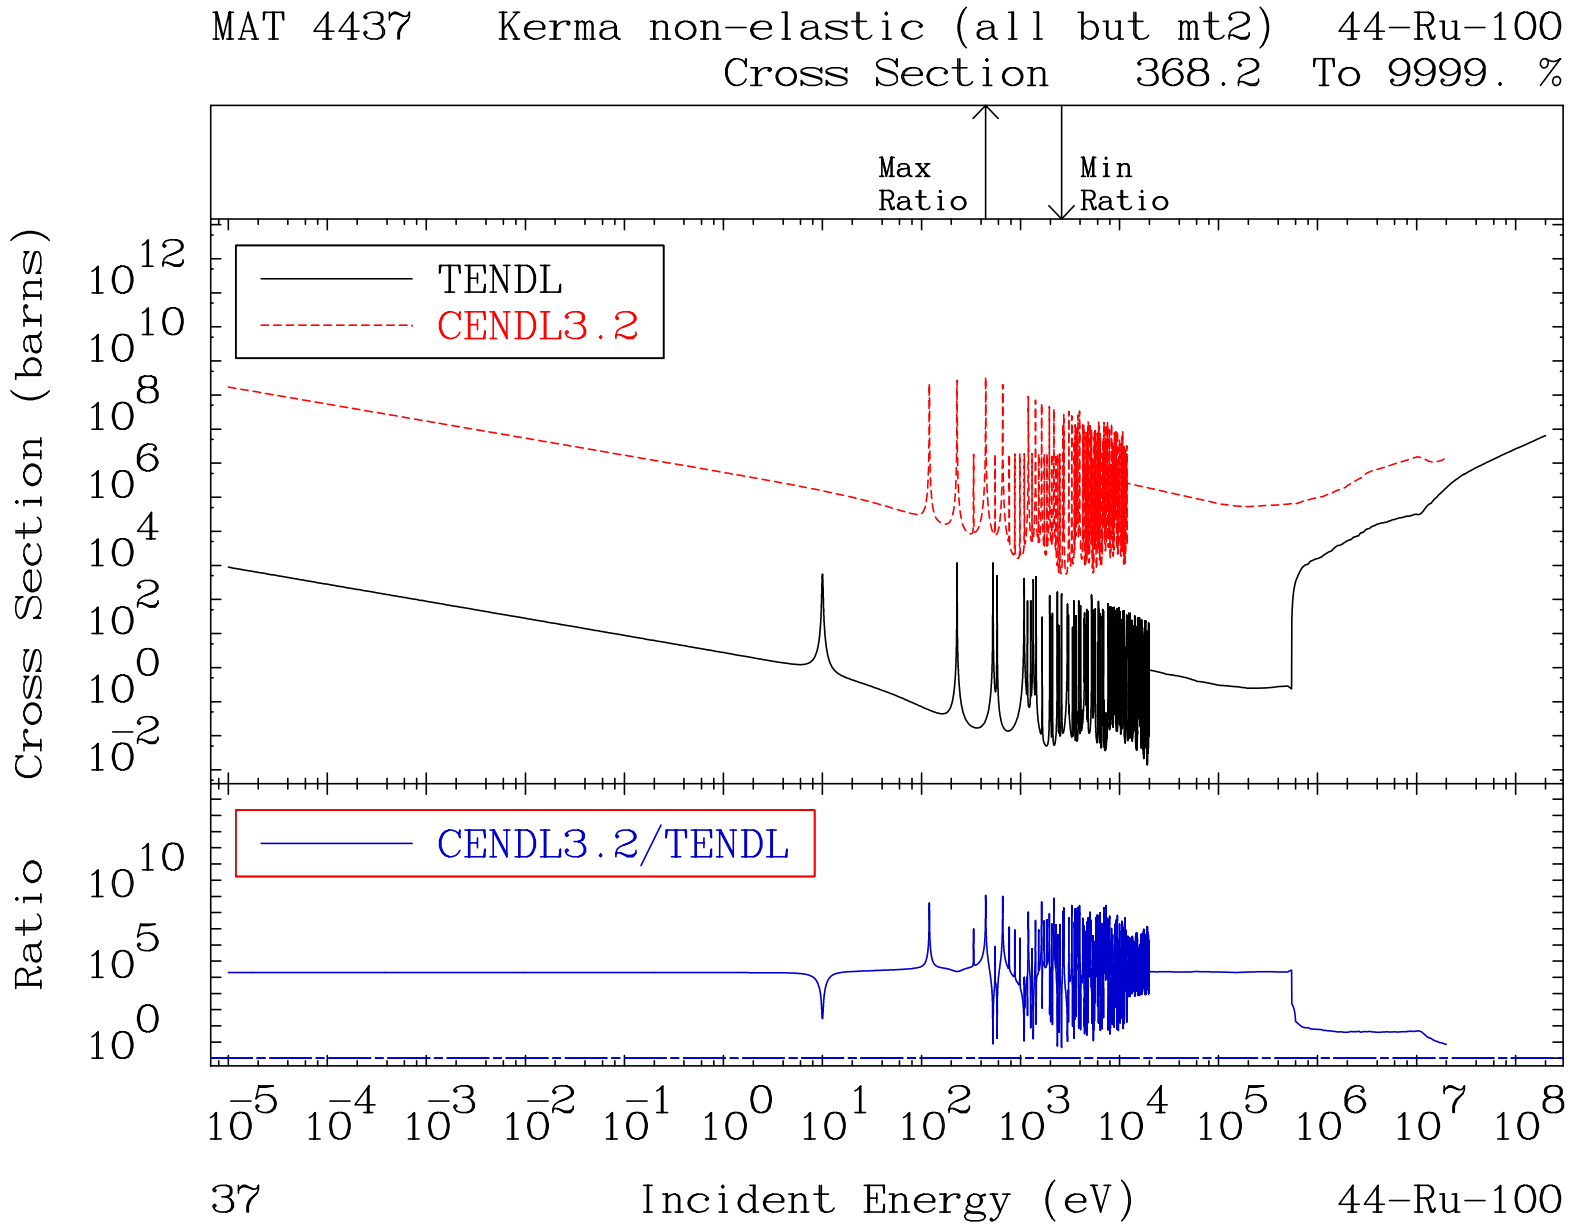
MAT 4437 Kerma non-elastic (all but mt2) 44-Ru-100
Cross Section 368.2 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
Cross Section (barns)
CENDL3.2/TENDL
Ratio
Incident Energy (eV)
37
44-Ru-100

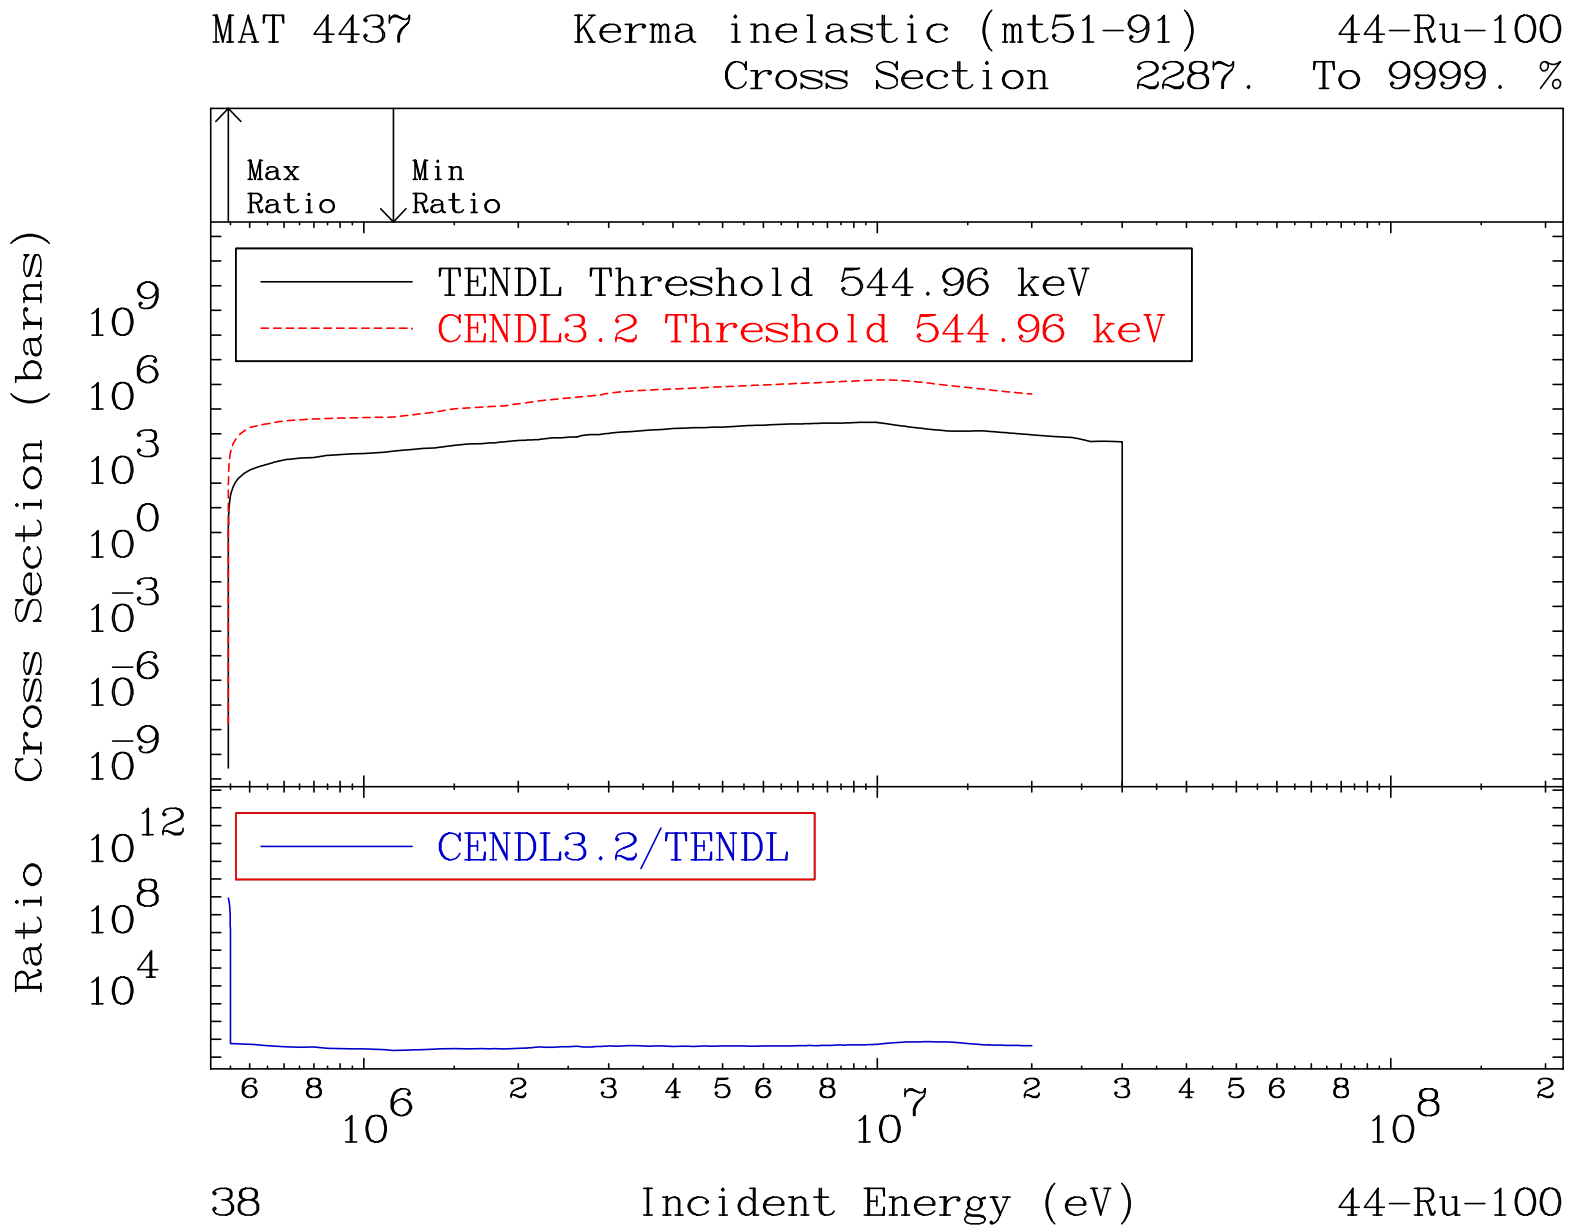
MAT 4437
Kerma inelastic (mt51-91)
44-Ru-100
Cross Section 2287. To 9999. %
Max Ratio
Min Ratio
TENDL Threshold 544.96 keV
CENDL3.2 Threshold 544.96 keV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
38
44-Ru-100

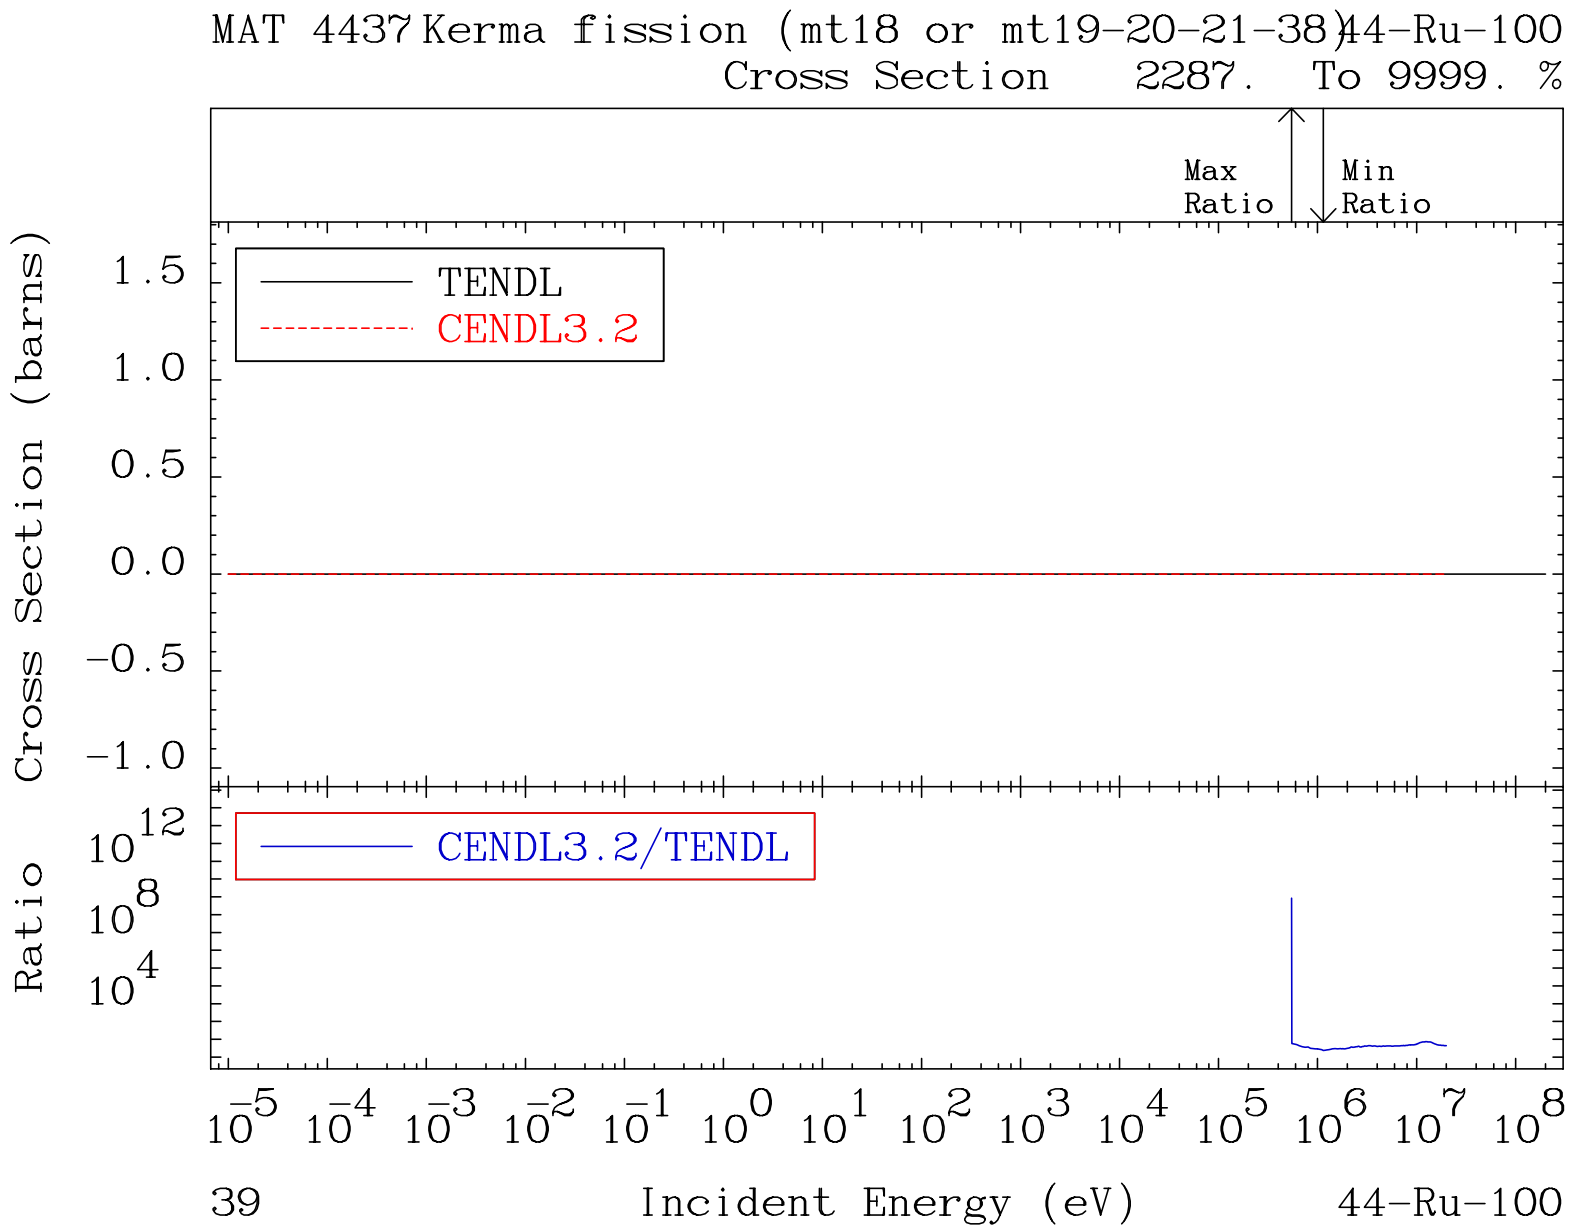
MAT 4437 Kerma fission (mt18 or mt19-20-21-38) 44-Ru-100
Cross Section 2287. To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
1.5
1.0
0.5
0.0
-0.5
-1.0
10^{12}
10^{8}
10^{4}
10^{-5} 10^{-4} 10^{-3} 10^{-2} 10^{-1} 10^{0} 10^{1} 10^{2} 10^{3} 10^{4} 10^{5} 10^{6} 10^{7} 10^{8}
39
Incident Energy (eV)
44-Ru-100

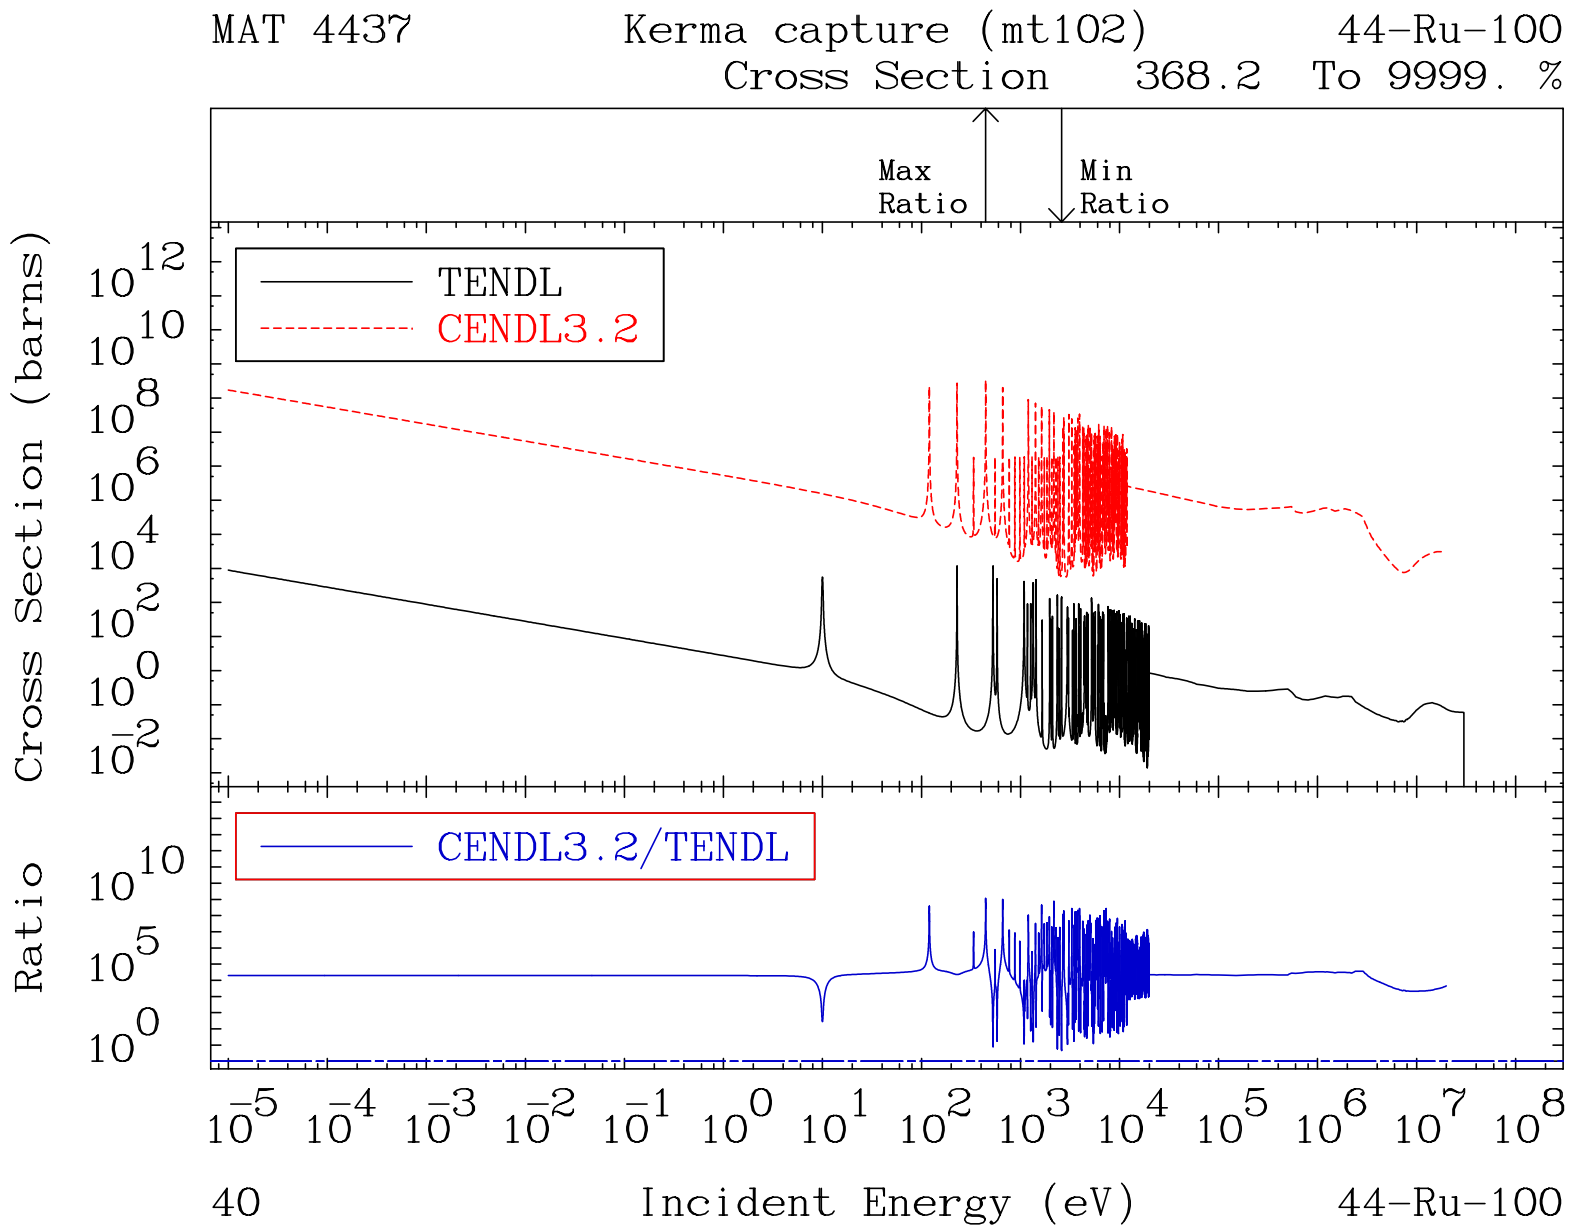
MAT 4437
Kerma capture (mt102)
44-Ru-100
Cross Section 368.2 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
Cross Section (barns)
CENDL3.2/TENDL
Ratio
Incident Energy (eV)
40
44-Ru-100

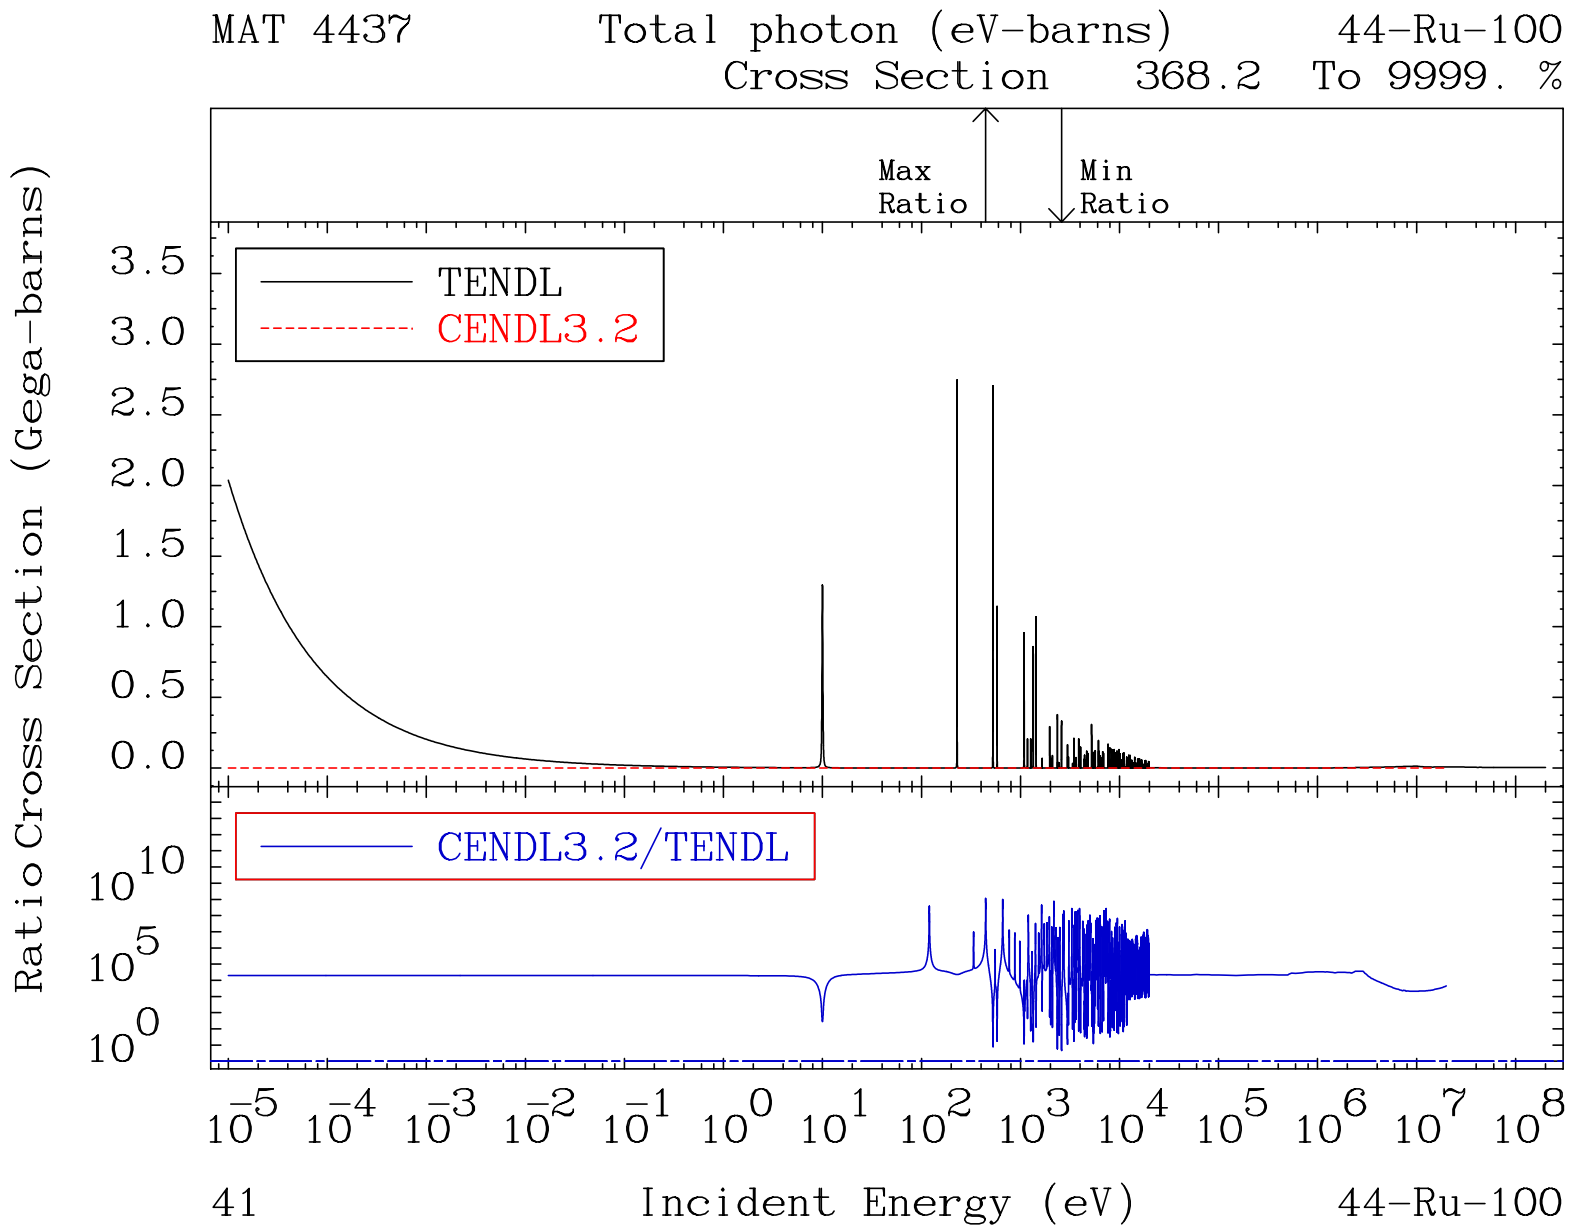
MAT 4437
Total photon (eV-barns)
44-Ru-100
Cross Section 368.2 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Ratio Cross Section (Gega-barns)
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
10^10
10^5
10^0
10^-5 10^-4 10^-3 10^-2 10^-1 10^0 10^1 10^2 10^3 10^4 10^5 10^6 10^7 10^8
41
Incident Energy (eV)
44-Ru-100

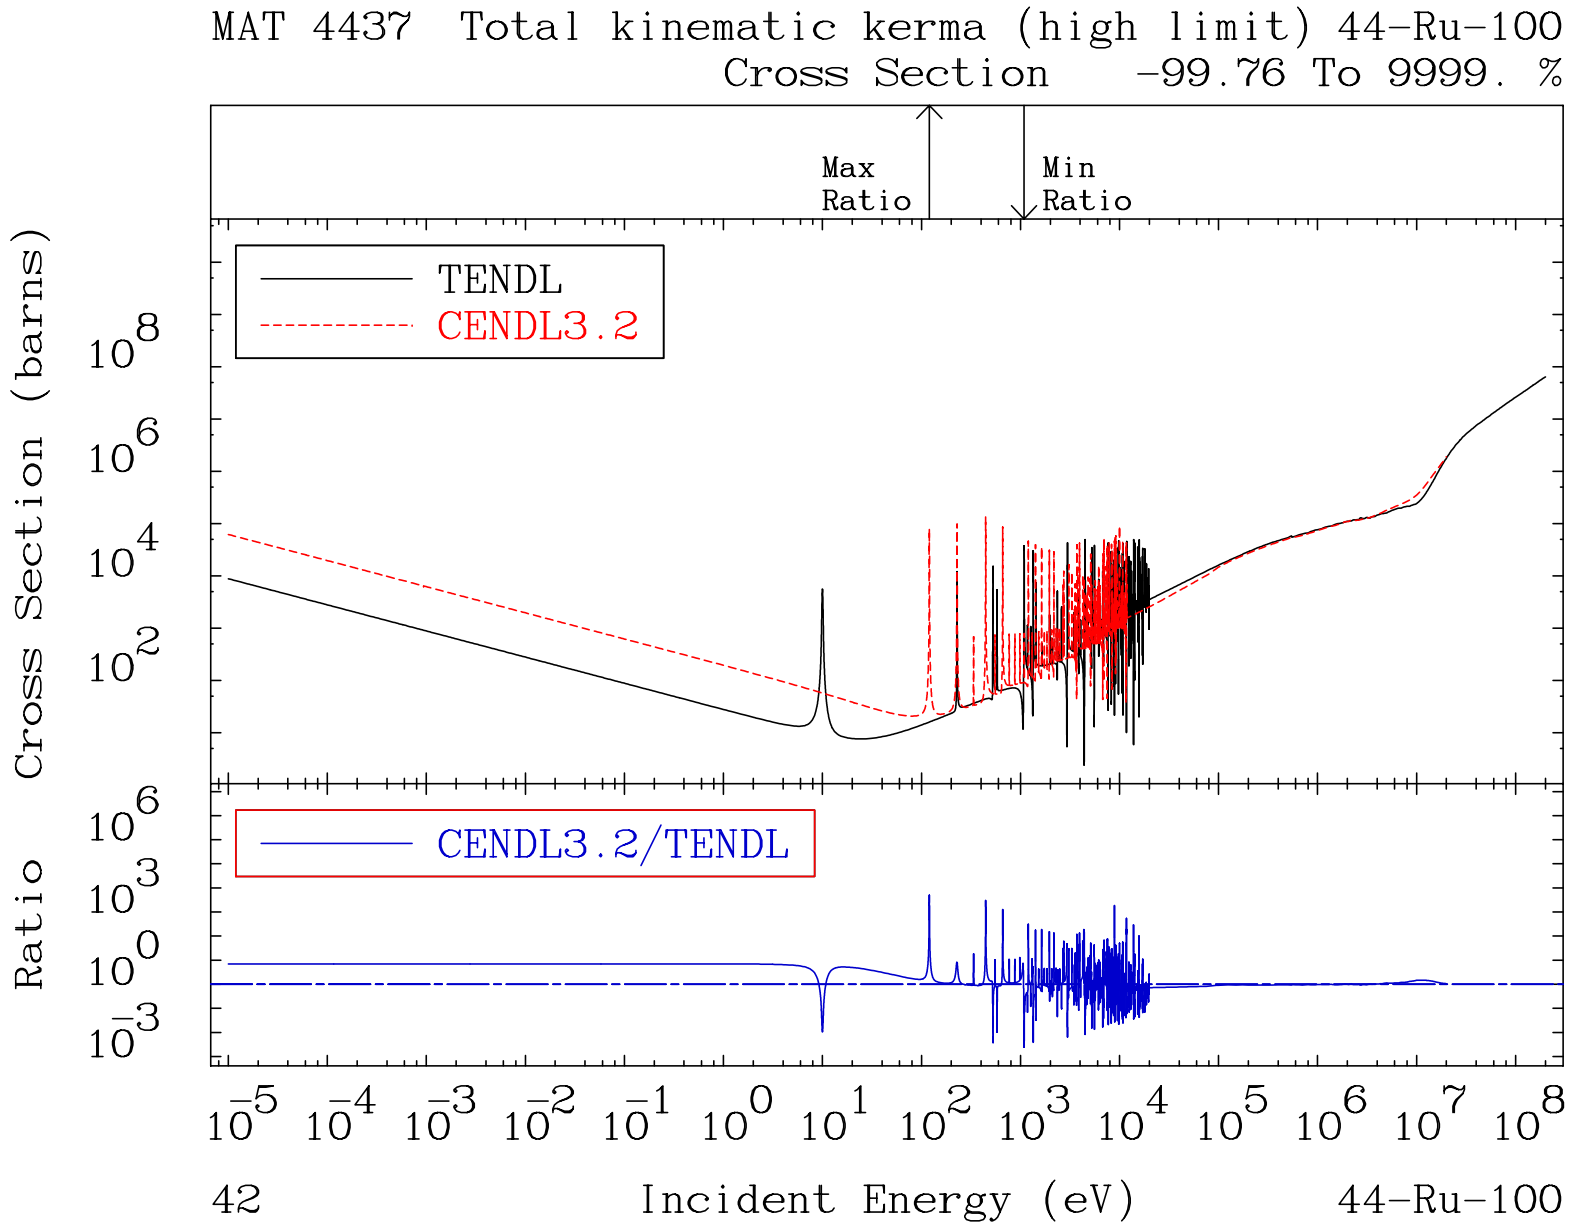
MAT 4437 Total kinematic kerma (high limit) 44-Ru-100
Cross Section -99.76 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
42
44-Ru-100

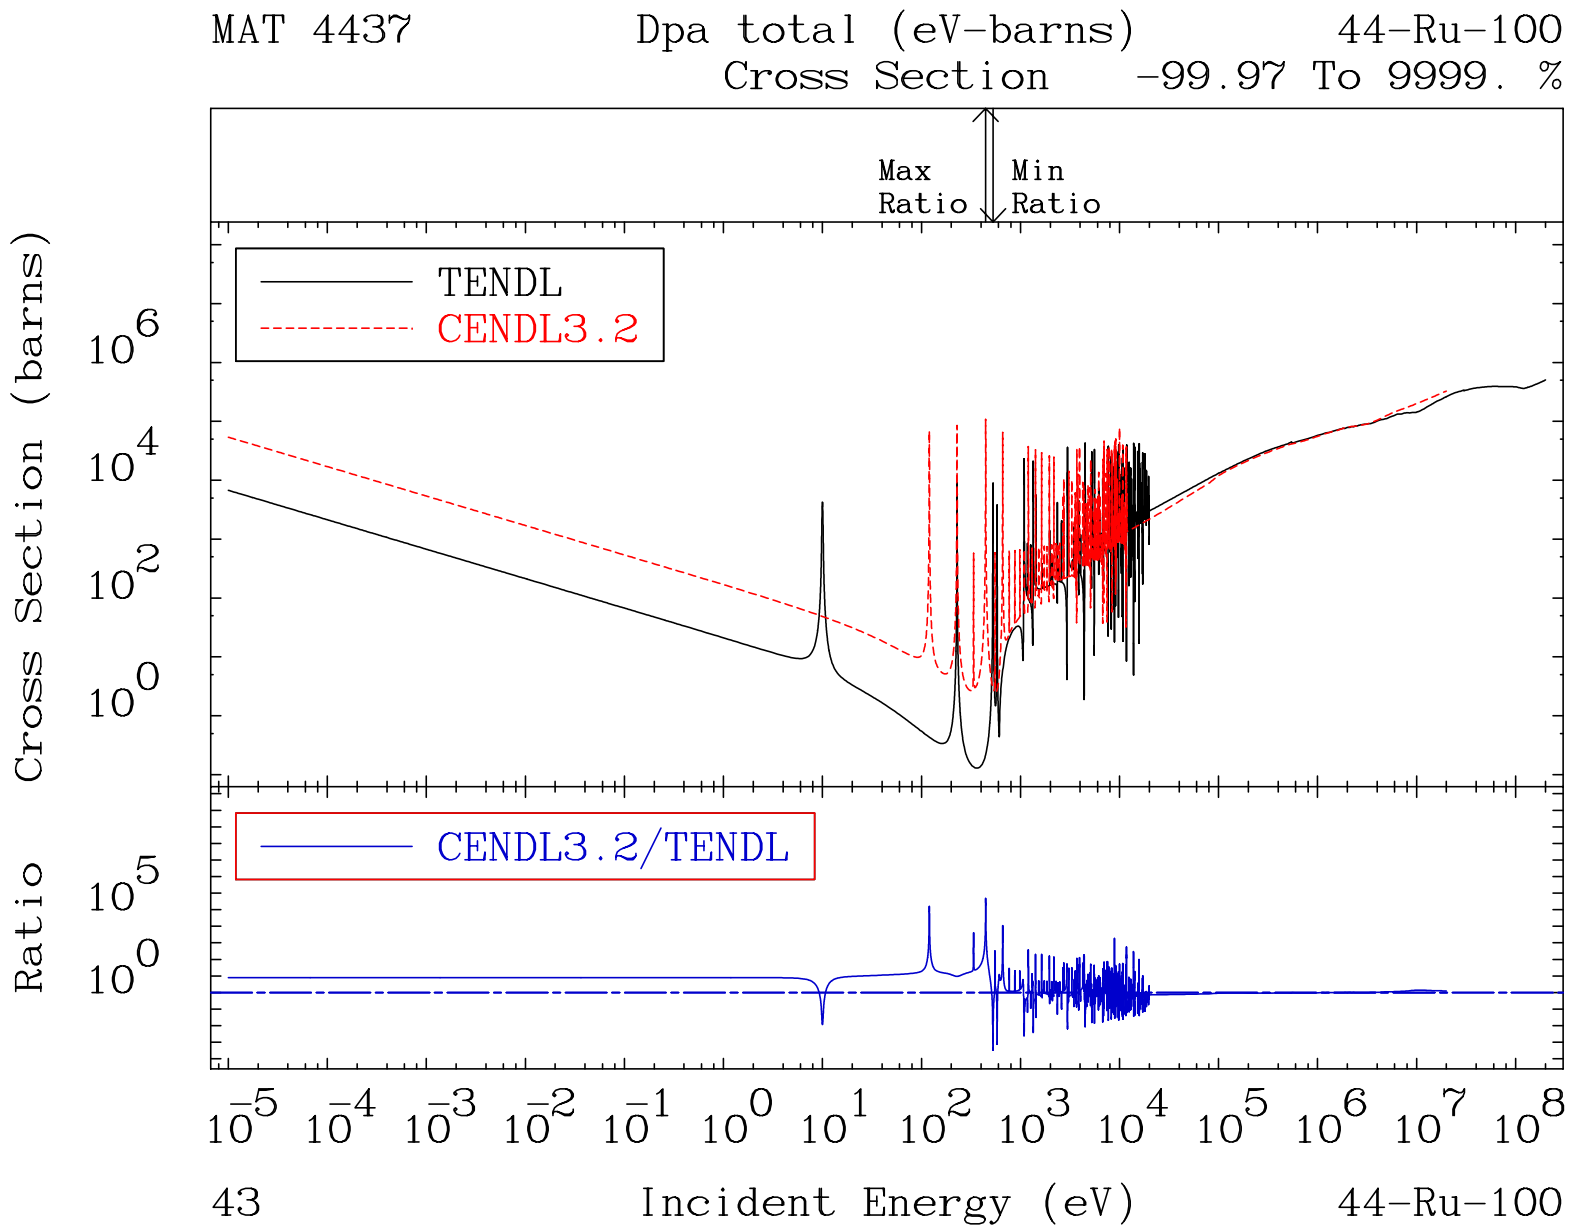
MAT 4437
Dpa total (eV-barns)
44-Ru-100
Cross Section
-99.97 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
43
44-Ru-100

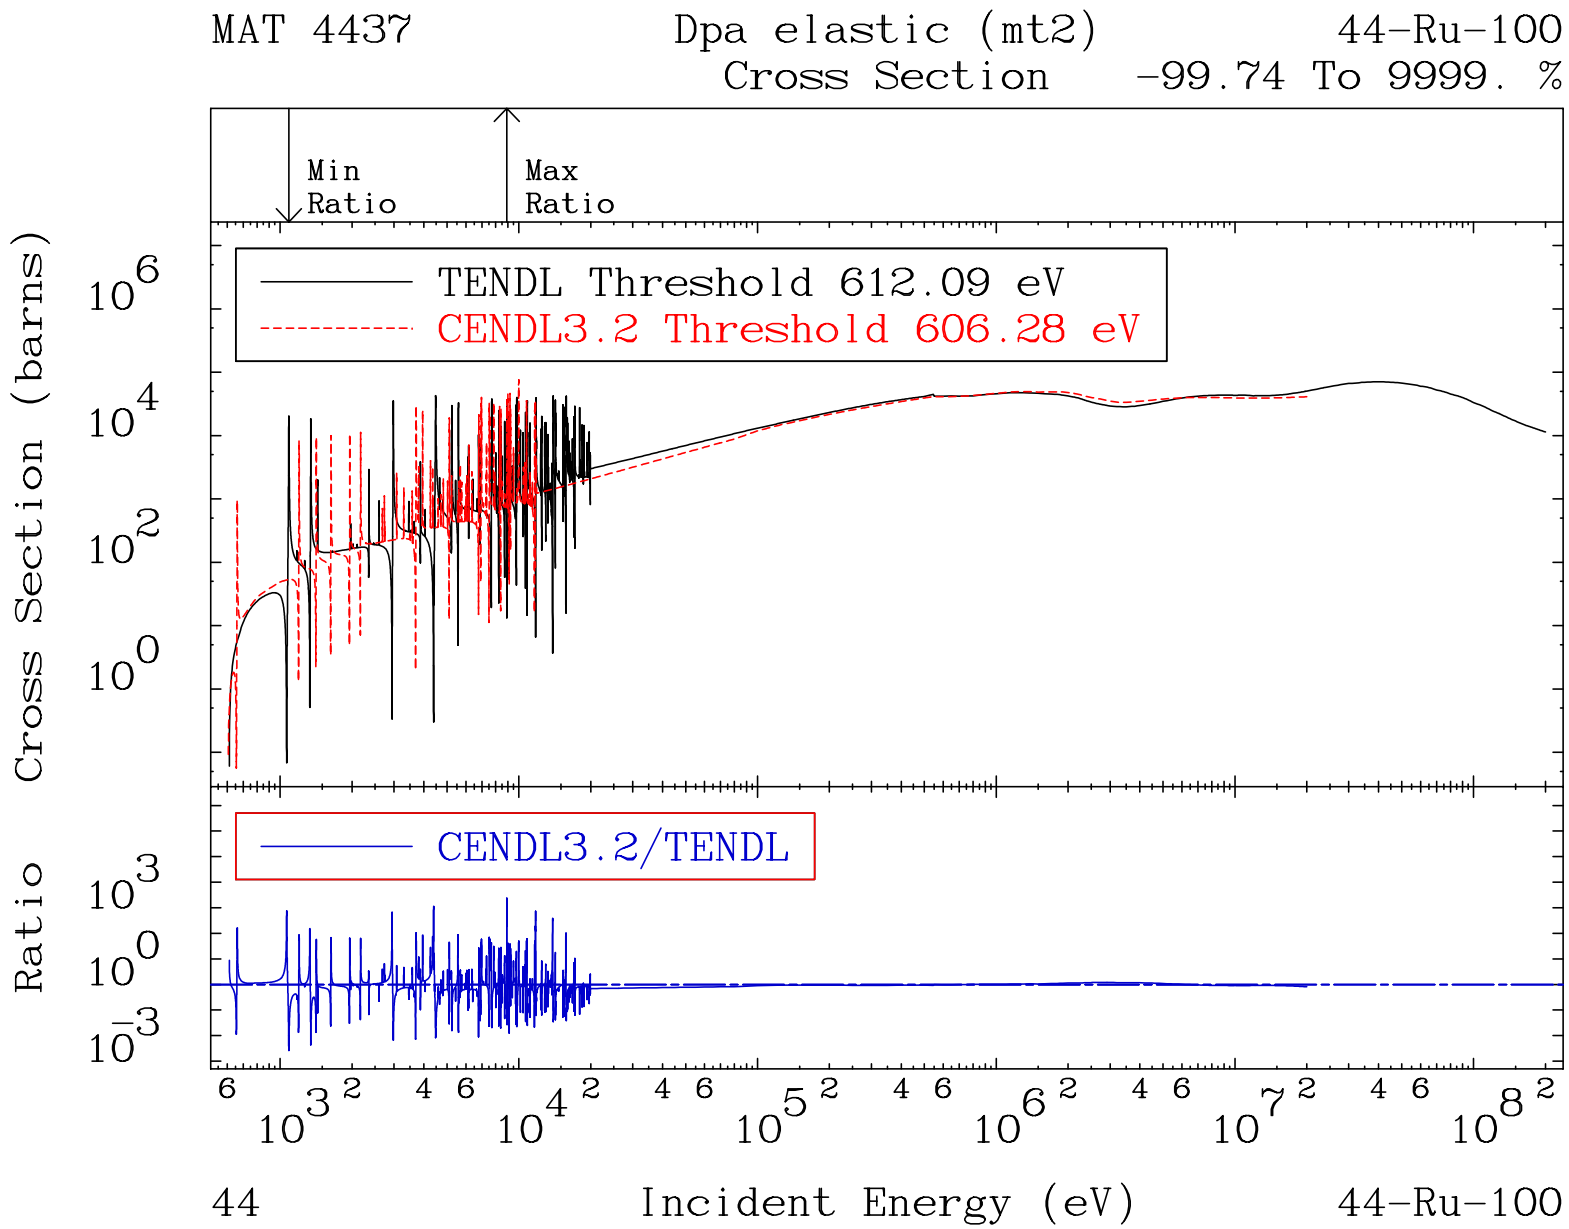
MAT 4437
Dpa elastic (mt2)
Cross Section
44-Ru-100
-99.74 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 612.09 eV
CENDL3.2 Threshold 606.28 eV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
44
44-Ru-100

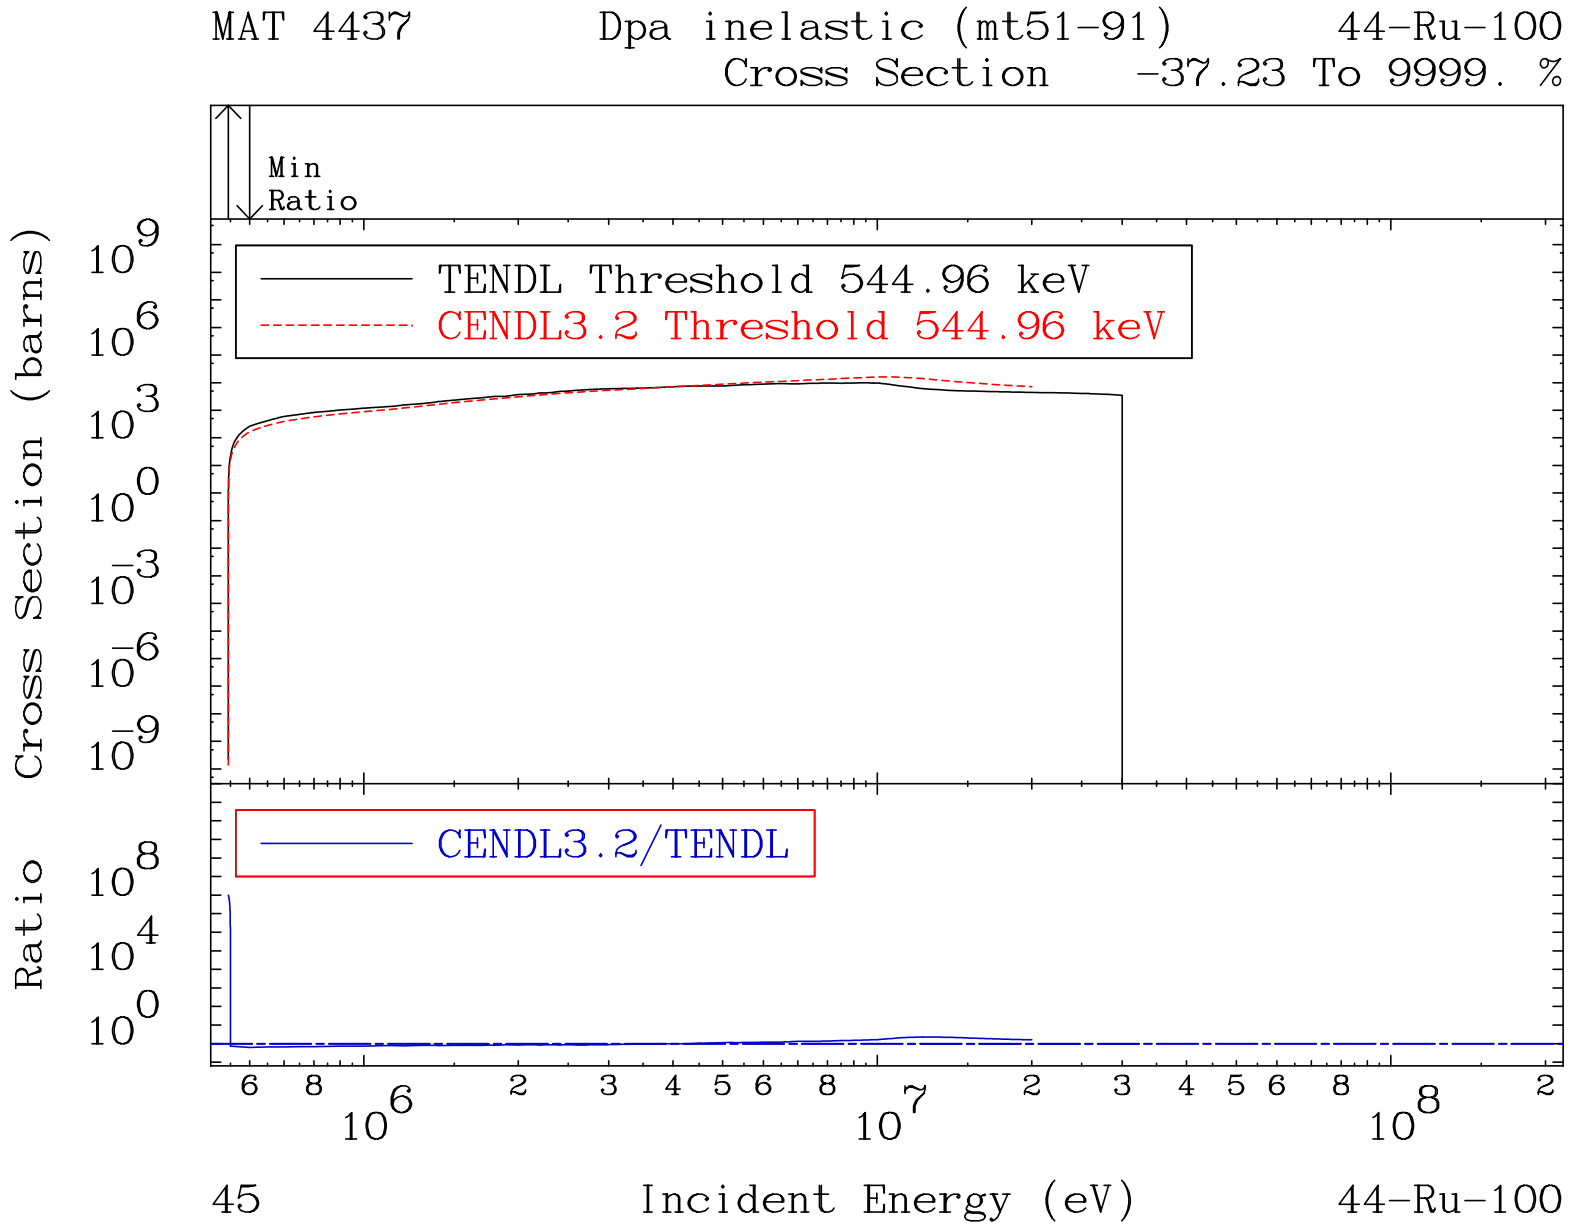
MAT 4437
Dpa inelastic (mt51-91)
44-Ru-100
Cross Section -37.23 To 9999. %
Min
Ratio
TENDL Threshold 544.96 keV
CENDL3.2 Threshold 544.96 keV
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
45
44-Ru-100

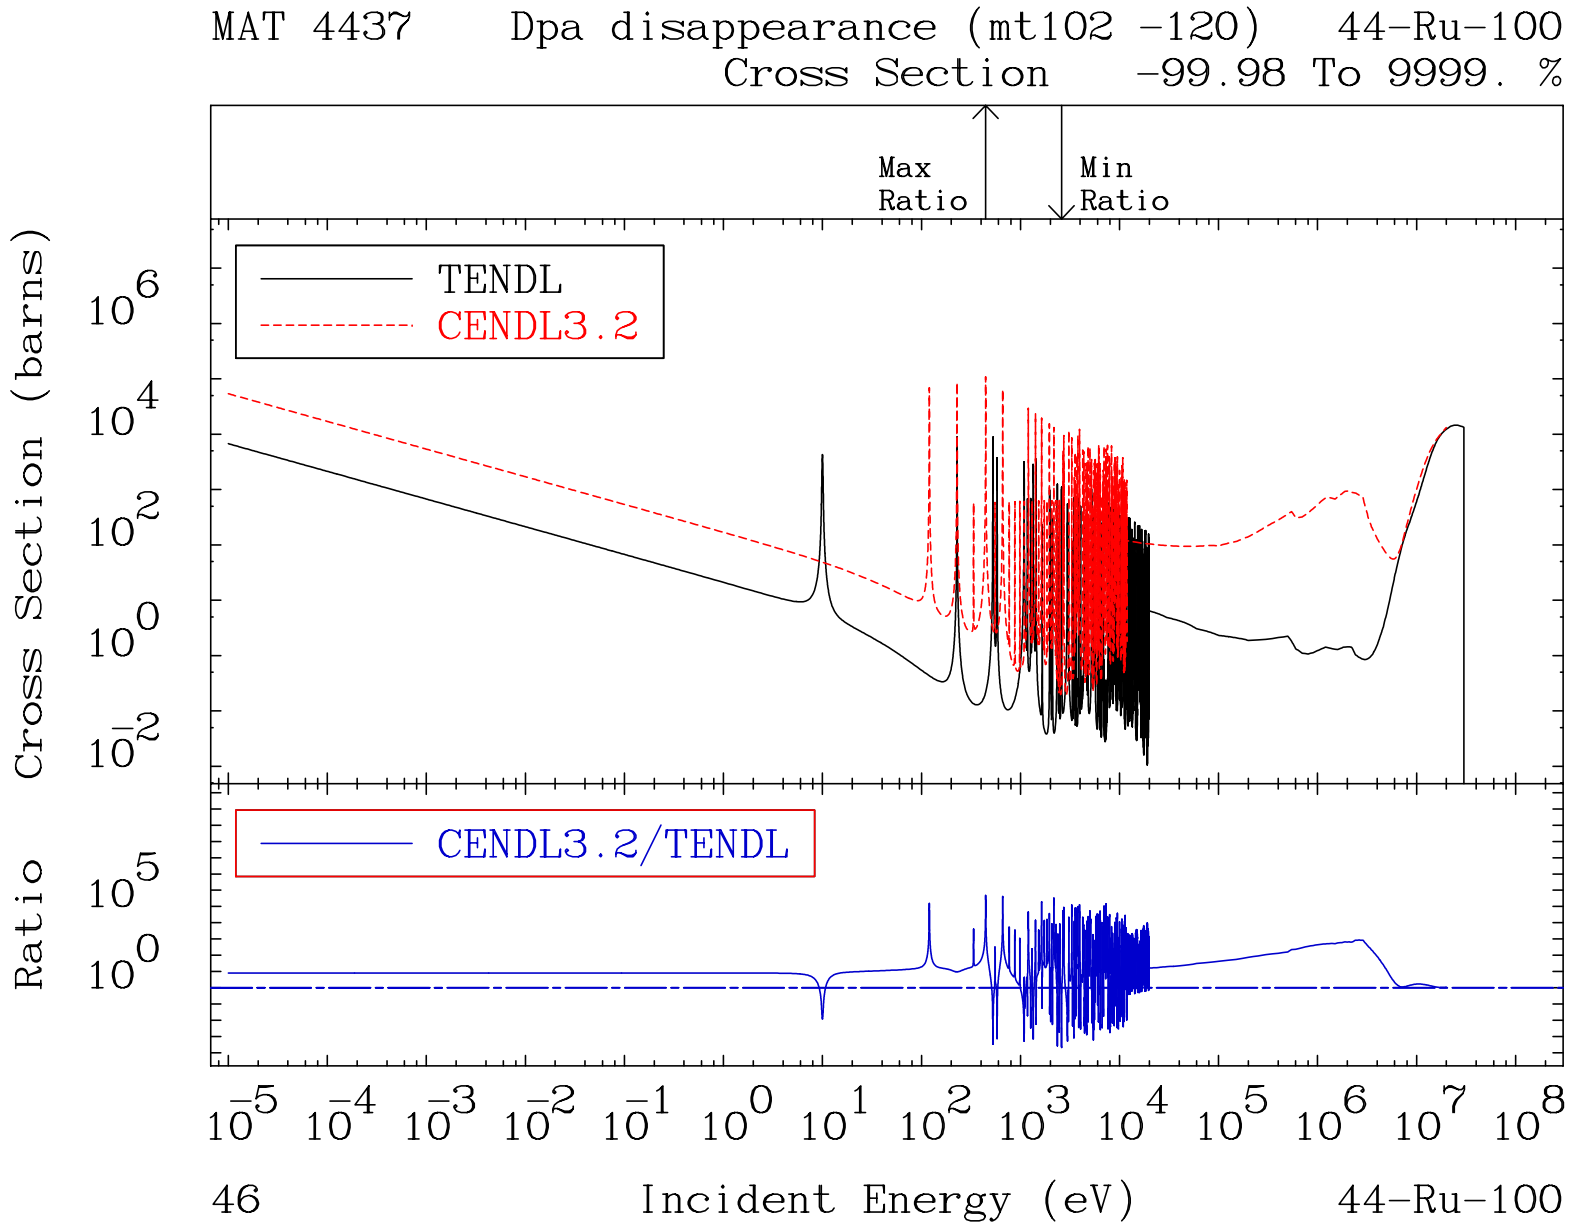
MAT 4437 Dpa disappearance (mt102 -120) 44-Ru-100
Cross Section -99.98 To 9999. %
Max Ratio
Min Ratio
TENDL
CENDL3.2
CENDL3.2/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
46
44-Ru-100

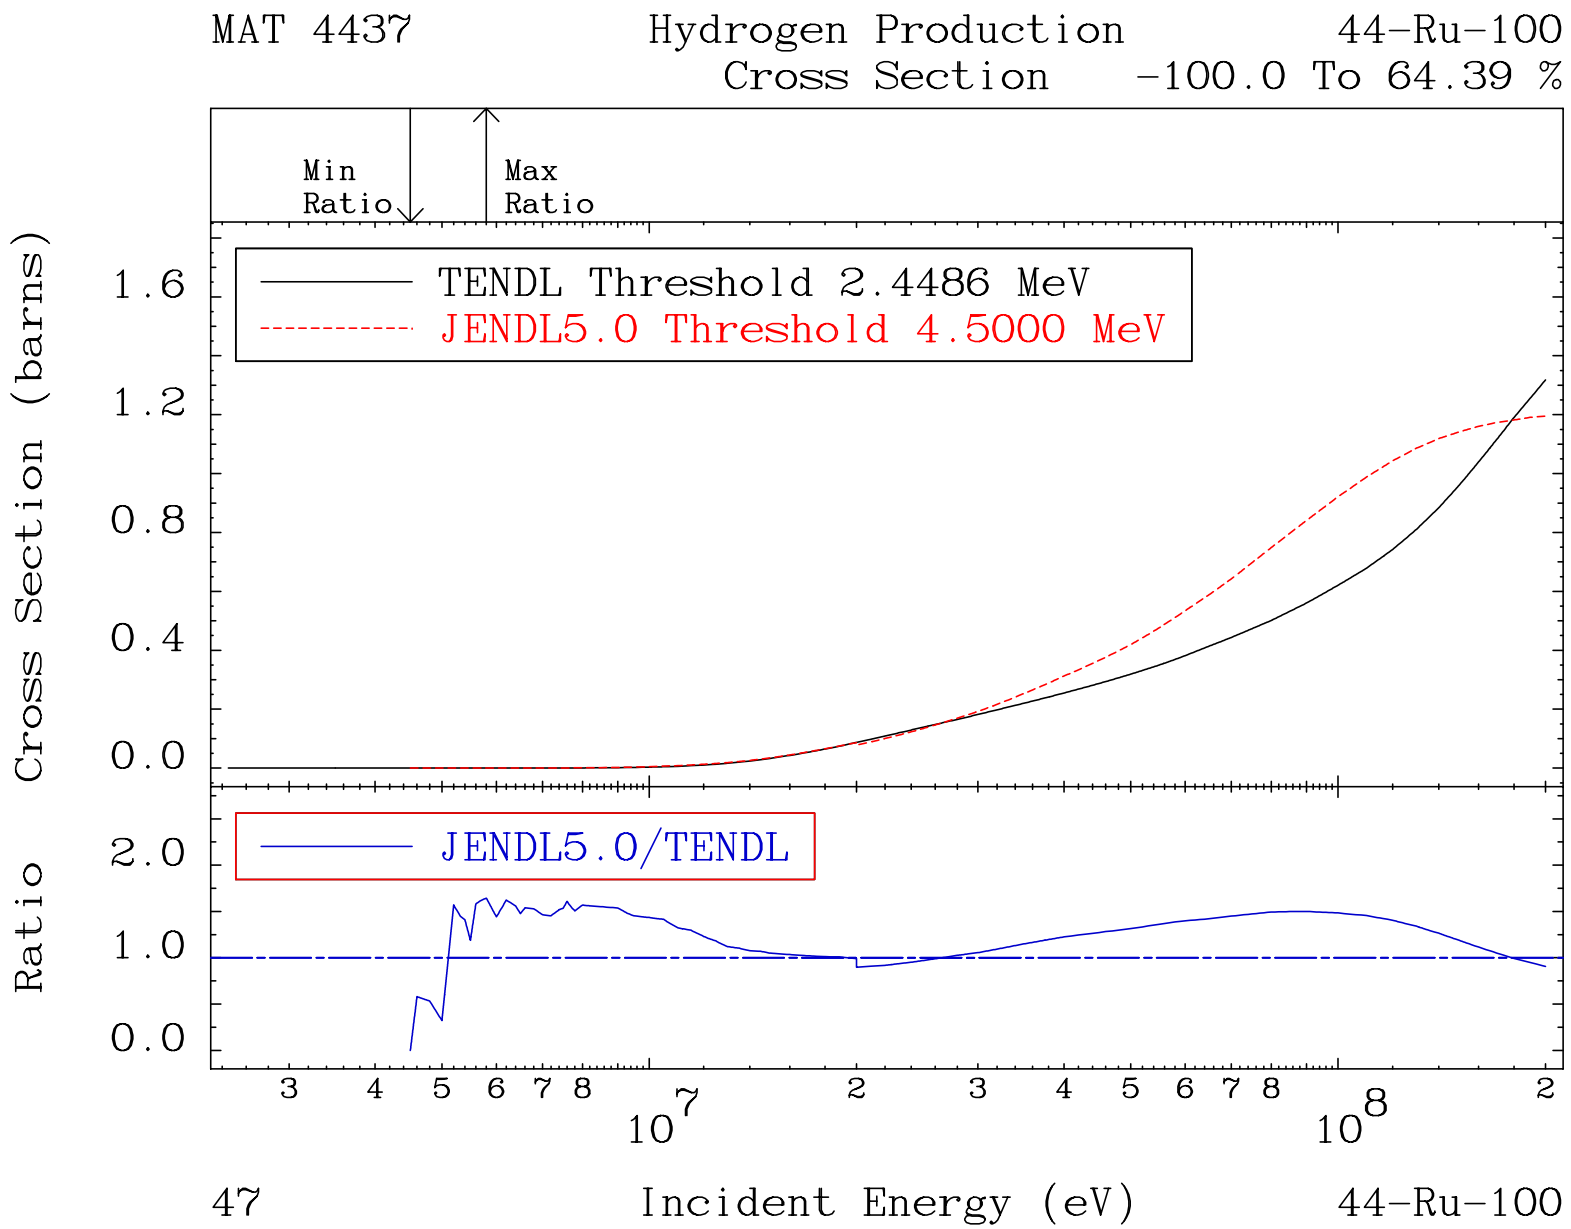
MAT 4437
Hydrogen Production
44-Ru-100
Cross Section
-100.0 To 64.39 %
Min Ratio
Max Ratio
TENDL Threshold 2.4486 MeV
JENDL5.0 Threshold 4.5000 MeV
JENDL5.0/TENDL
Cross Section (barns)
Ratio
1.6
1.2
0.8
0.4
0.0
2.0
1.0
0.0
3 4 5 6 7 8
10^7
2 3 4 5 6 7 8
10^8
2
47
Incident Energy (eV)
44-Ru-100

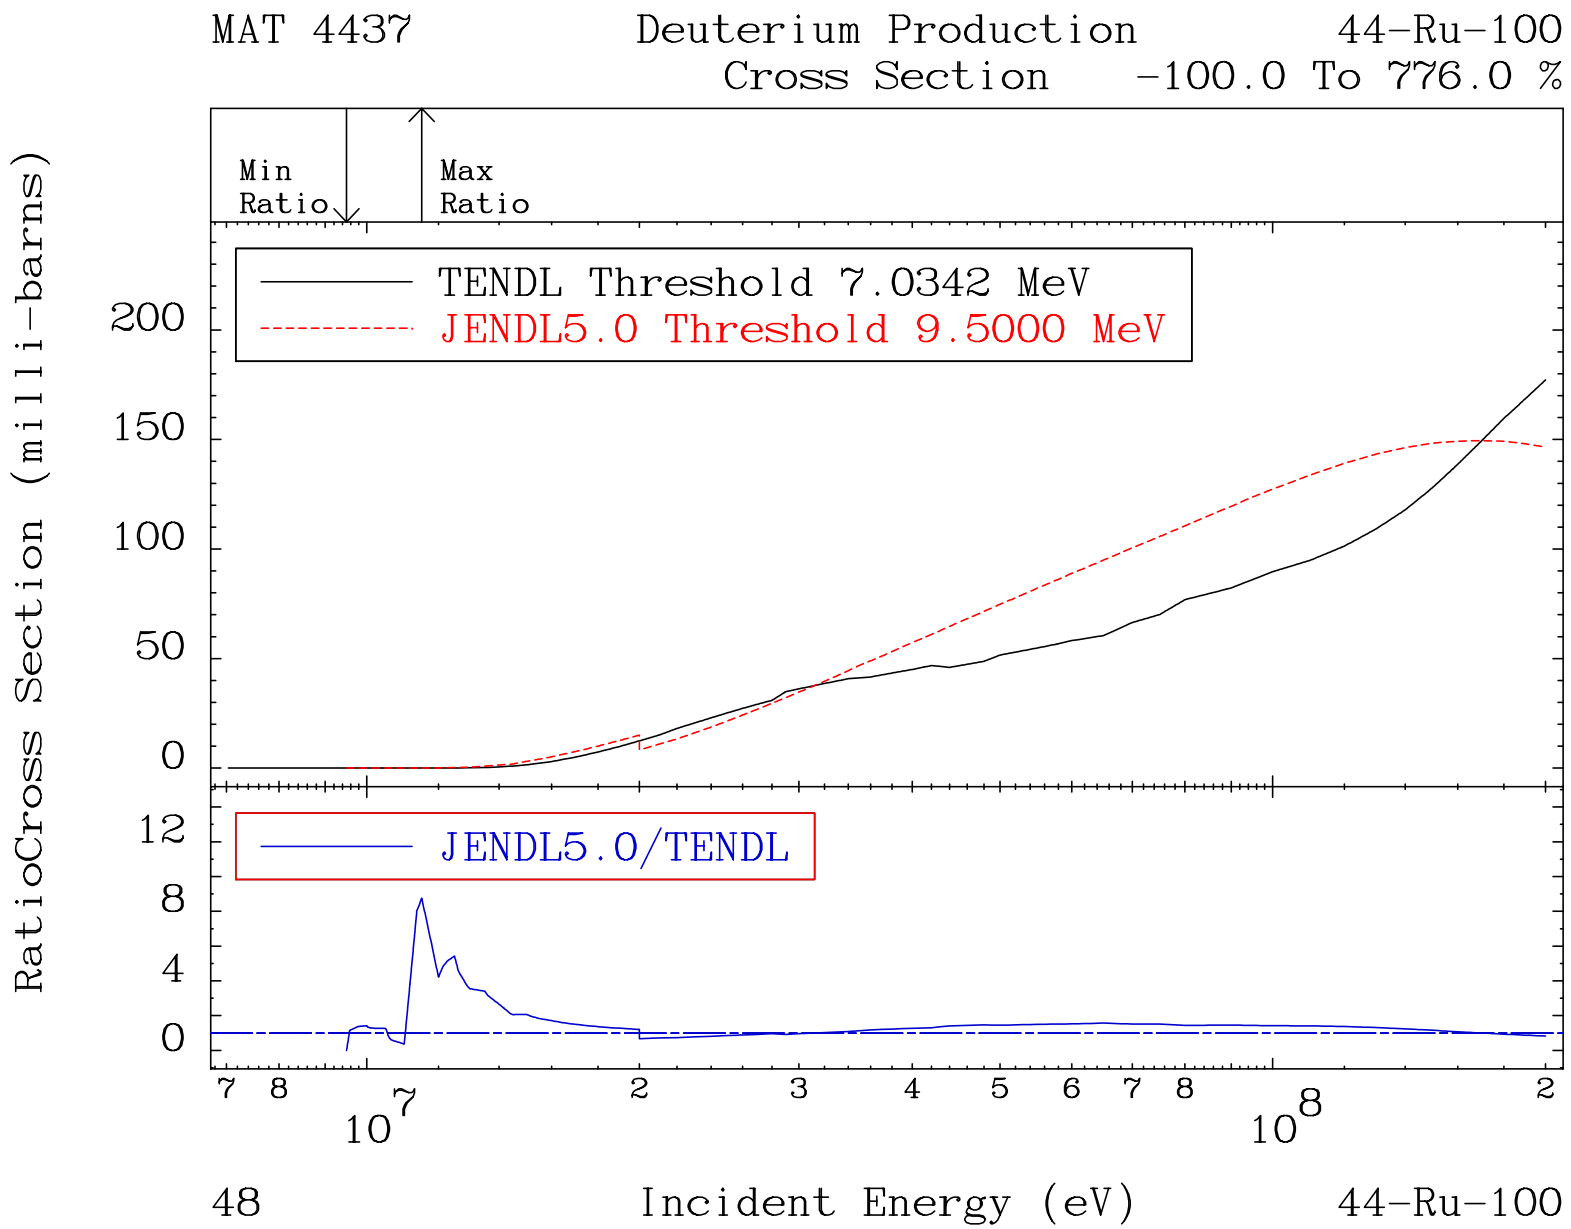
MAT 4437
Deuterium Production
44-Ru-100
Cross Section
-100.0 To 776.0 %
Min Ratio
Max Ratio
TENDL Threshold 7.0342 MeV
JENDL5.0 Threshold 9.5000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
200
150
100
50
0
12
8
4
0
7 8 10^7 2 3 4 5 6 7 8 10^8 2
48
Incident Energy (eV)
44-Ru-100

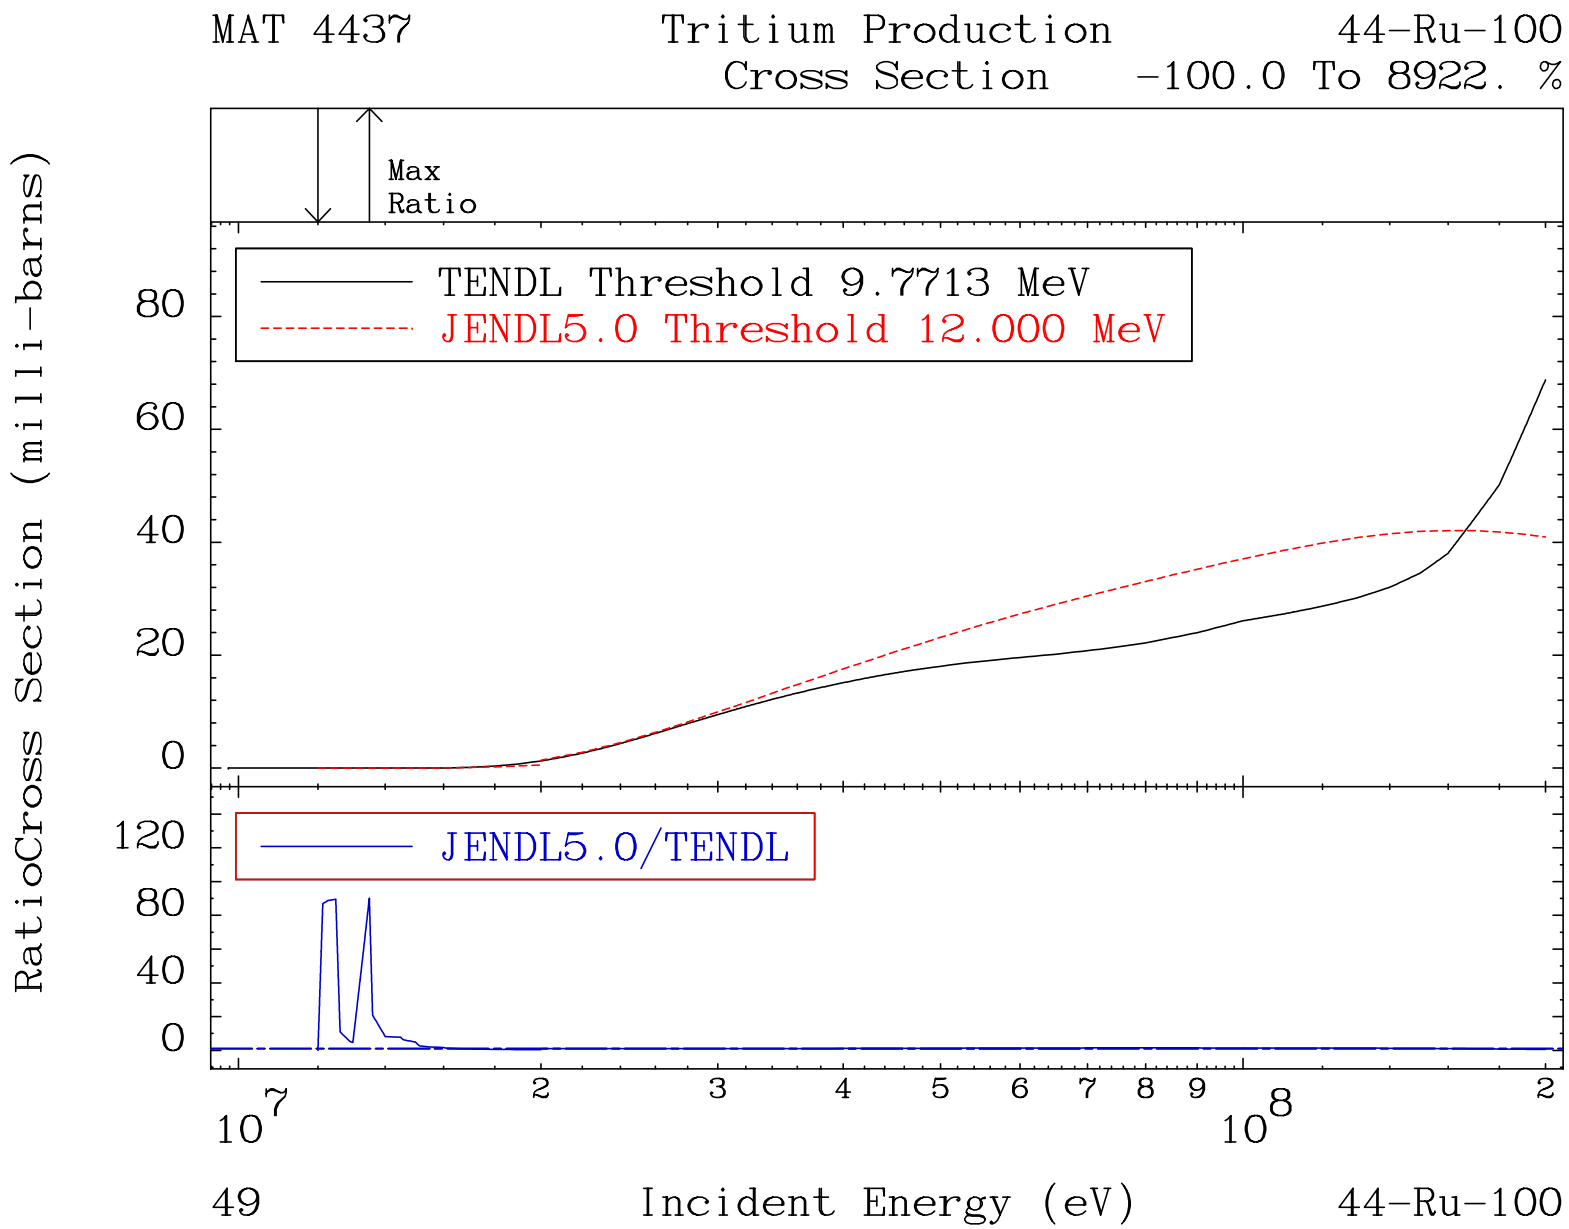
MAT 4437
Tritium Production
44-Ru-100
Cross Section
-100.0 To 8922. %
Max
Ratio
TENDL Threshold 9.7713 MeV
JENDL5.0 Threshold 12.000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
80
60
40
20
0
120
80
40
0
10^7
2
3
4
5
6
7
8
9
10^8
2
49
Incident Energy (eV)
44-Ru-100

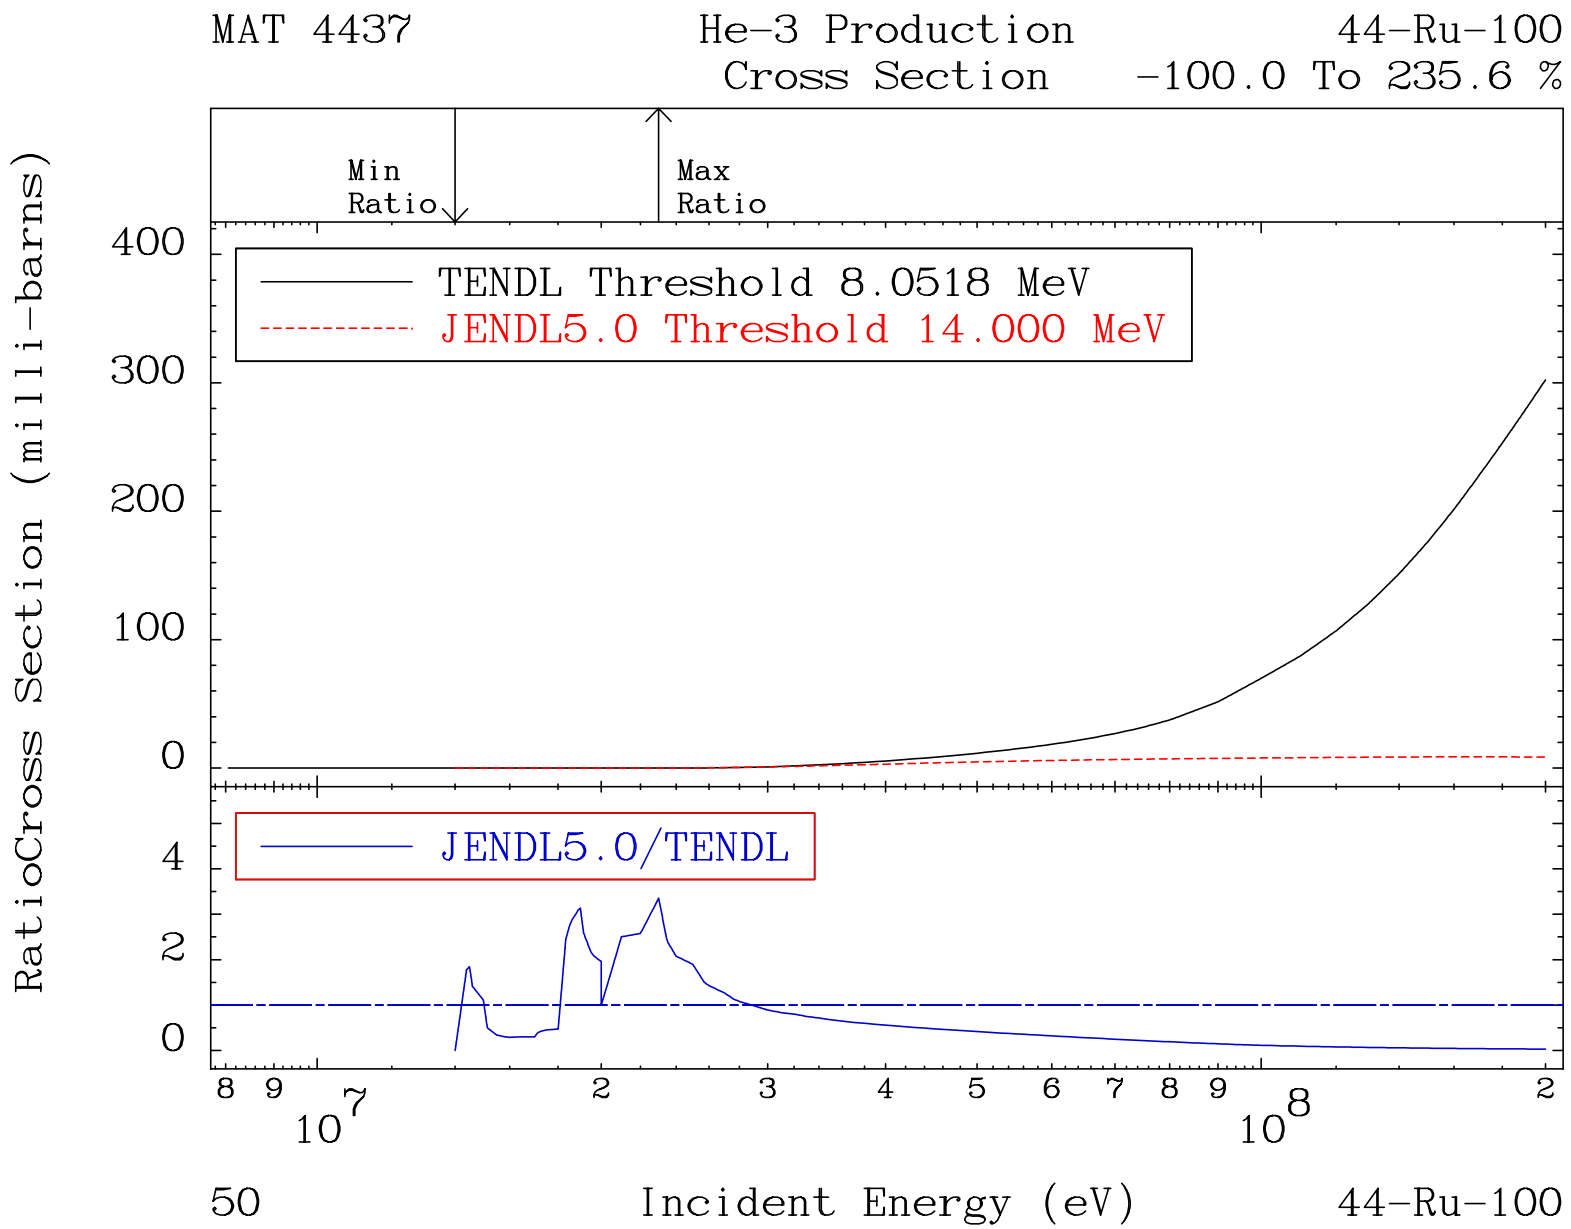
MAT 4437
He-3 Production
Cross Section
44-Ru-100
-100.0 To 235.6 %
Min Ratio
Max Ratio
TENDL Threshold 8.0518 MeV
JENDL5.0 Threshold 14.000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
400
300
200
100
0
4
2
0
8 9 10^7 2 3 4 5 6 7 8 9 10^8 2
50
Incident Energy (eV)
44-Ru-100

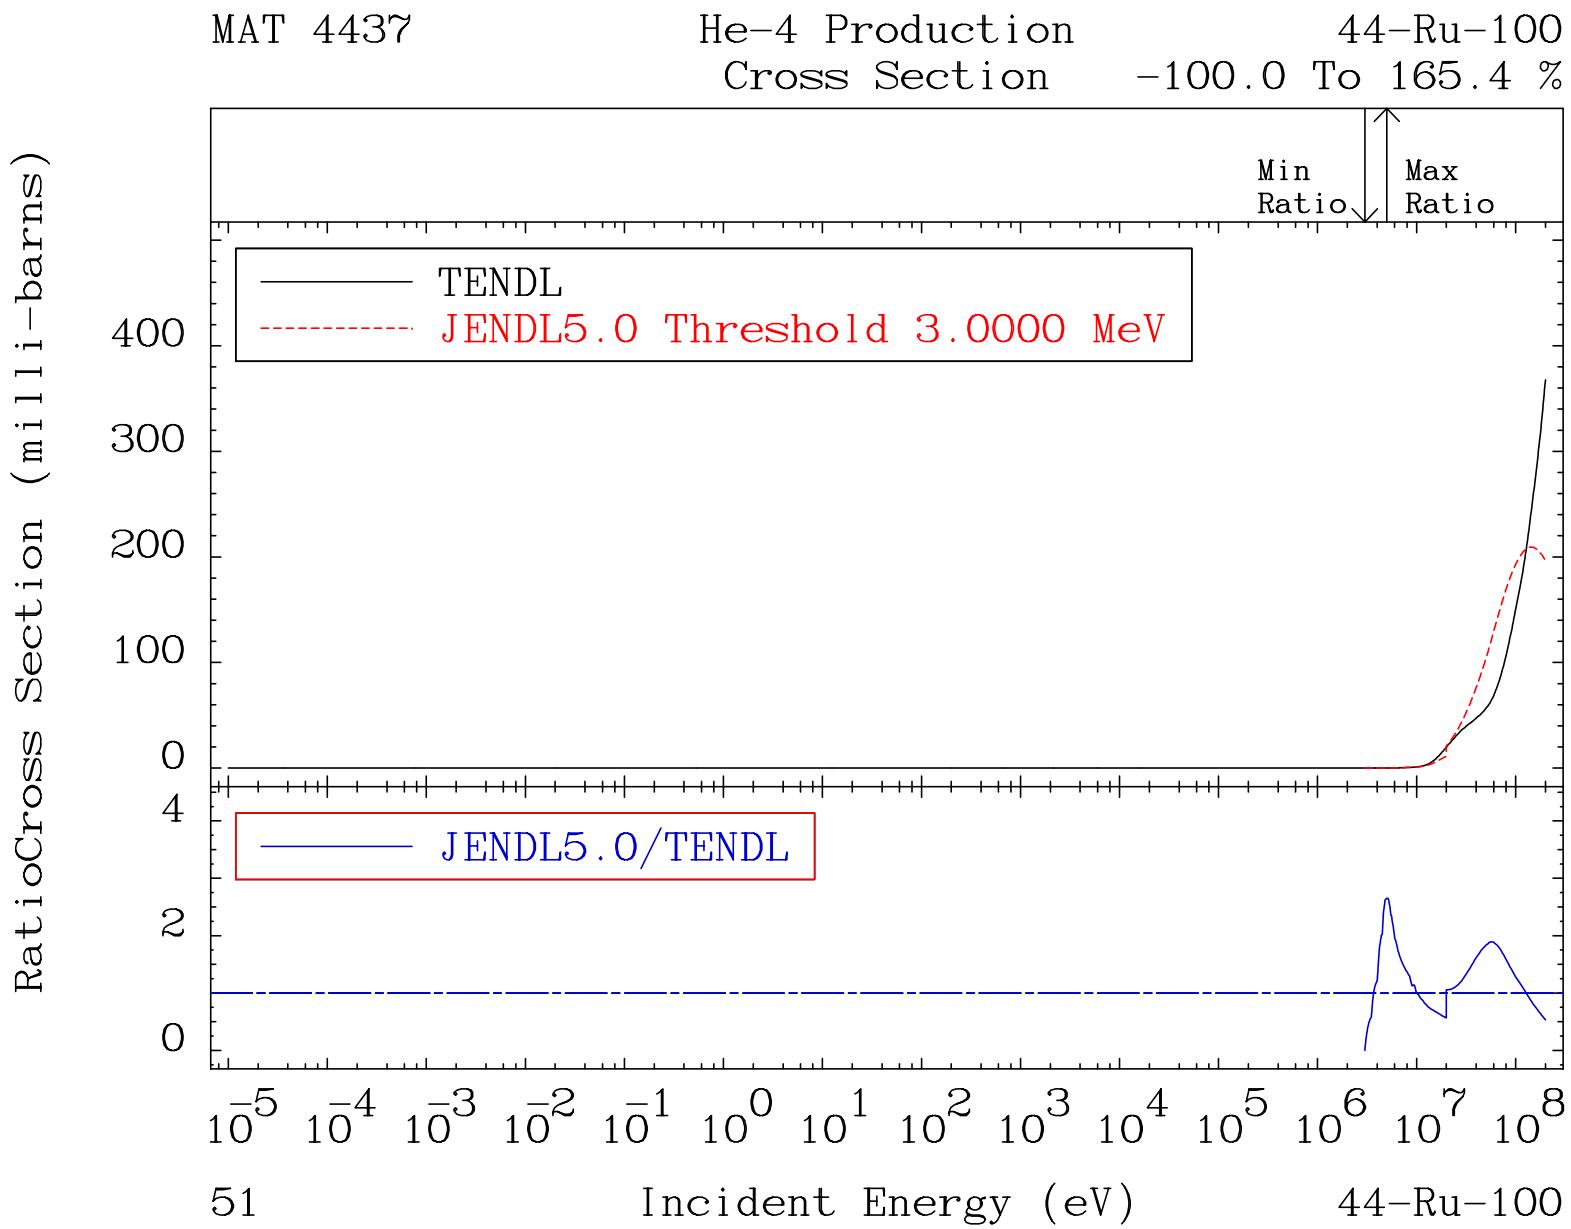
MAT 4437
He-4 Production
Cross Section
44-Ru-100
-100.0 To 165.4 %
Min Ratio
Max Ratio
TENDL
JENDL5.0 Threshold 3.0000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
400
300
200
100
0
4
2
0
10^{-5} 10^{-4} 10^{-3} 10^{-2} 10^{-1} 10^{0} 10^{1} 10^{2} 10^{3} 10^{4} 10^{5} 10^{6} 10^{7} 10^{8}
51
Incident Energy (eV)
44-Ru-100

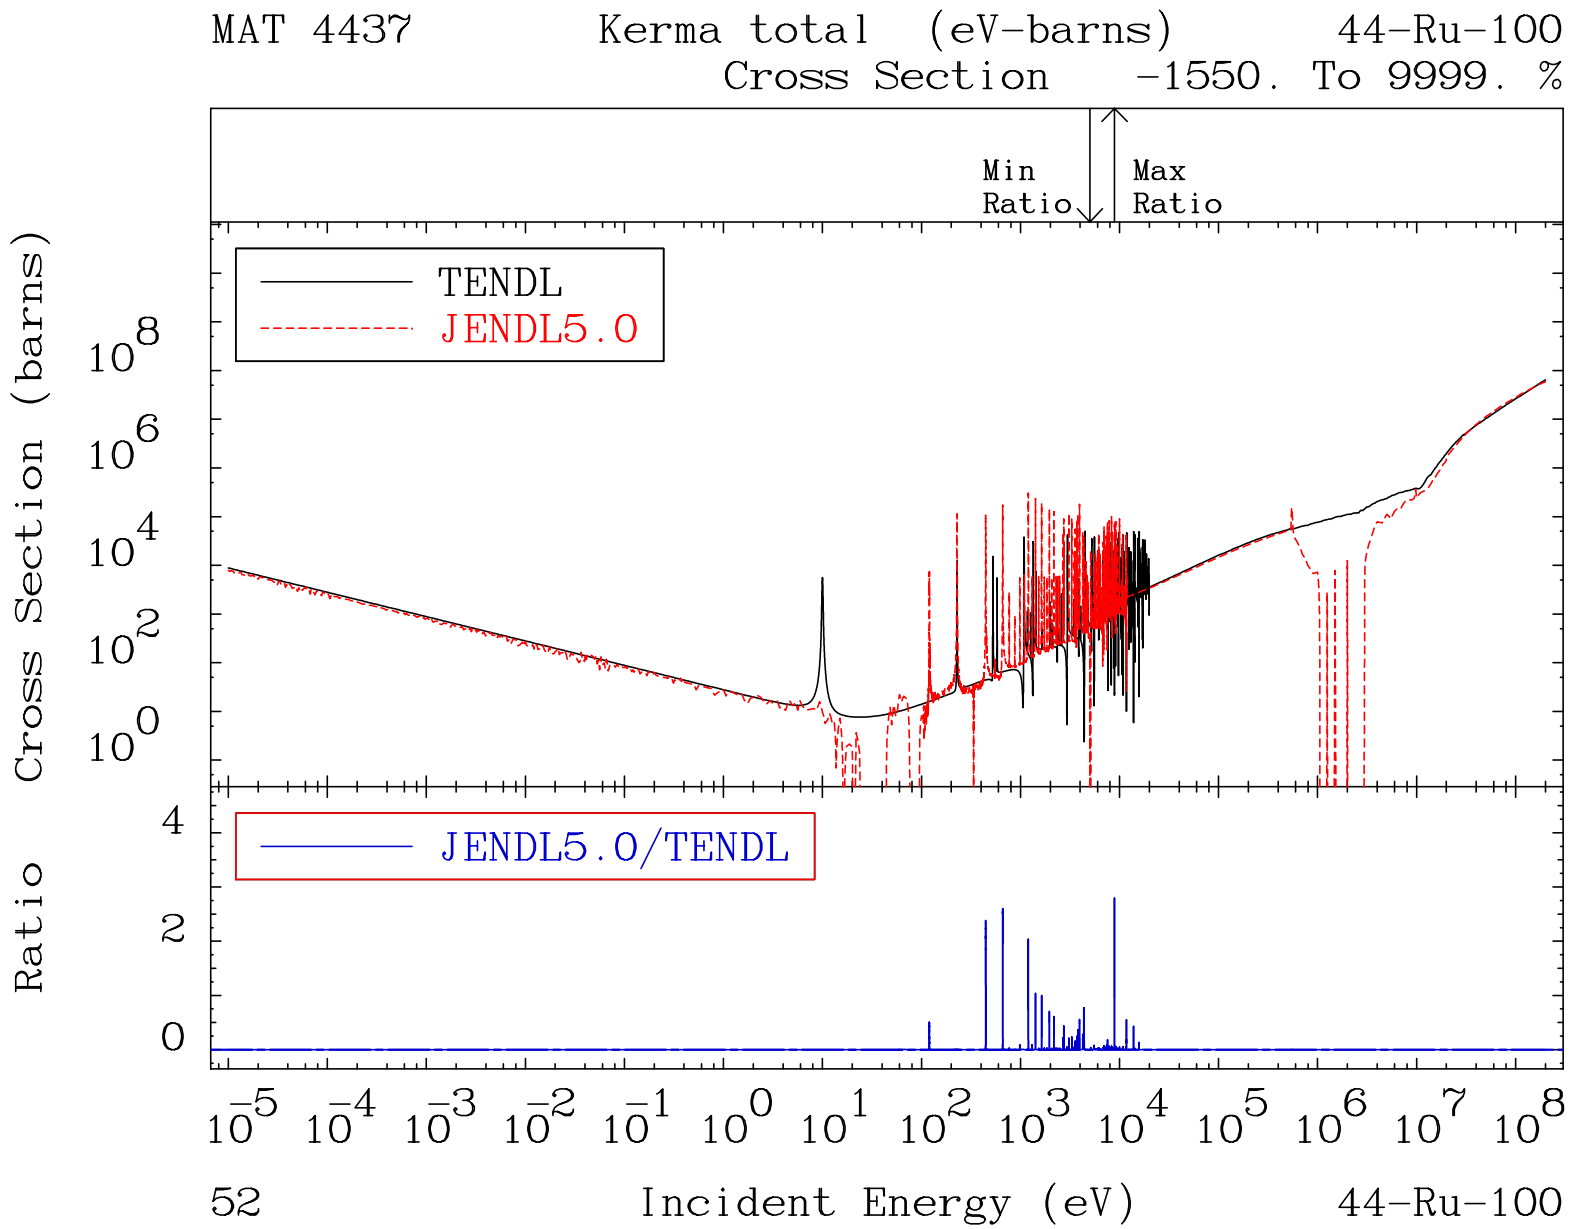
MAT 4437
Kerma total (eV-barns)
44-Ru-100
Cross Section -1550. To 9999. %
Min Ratio
Max Ratio
TENDL
JENDL5.0
Cross Section (barns)
JENDL5.0/TENDL
Ratio
Incident Energy (eV)
52
44-Ru-100

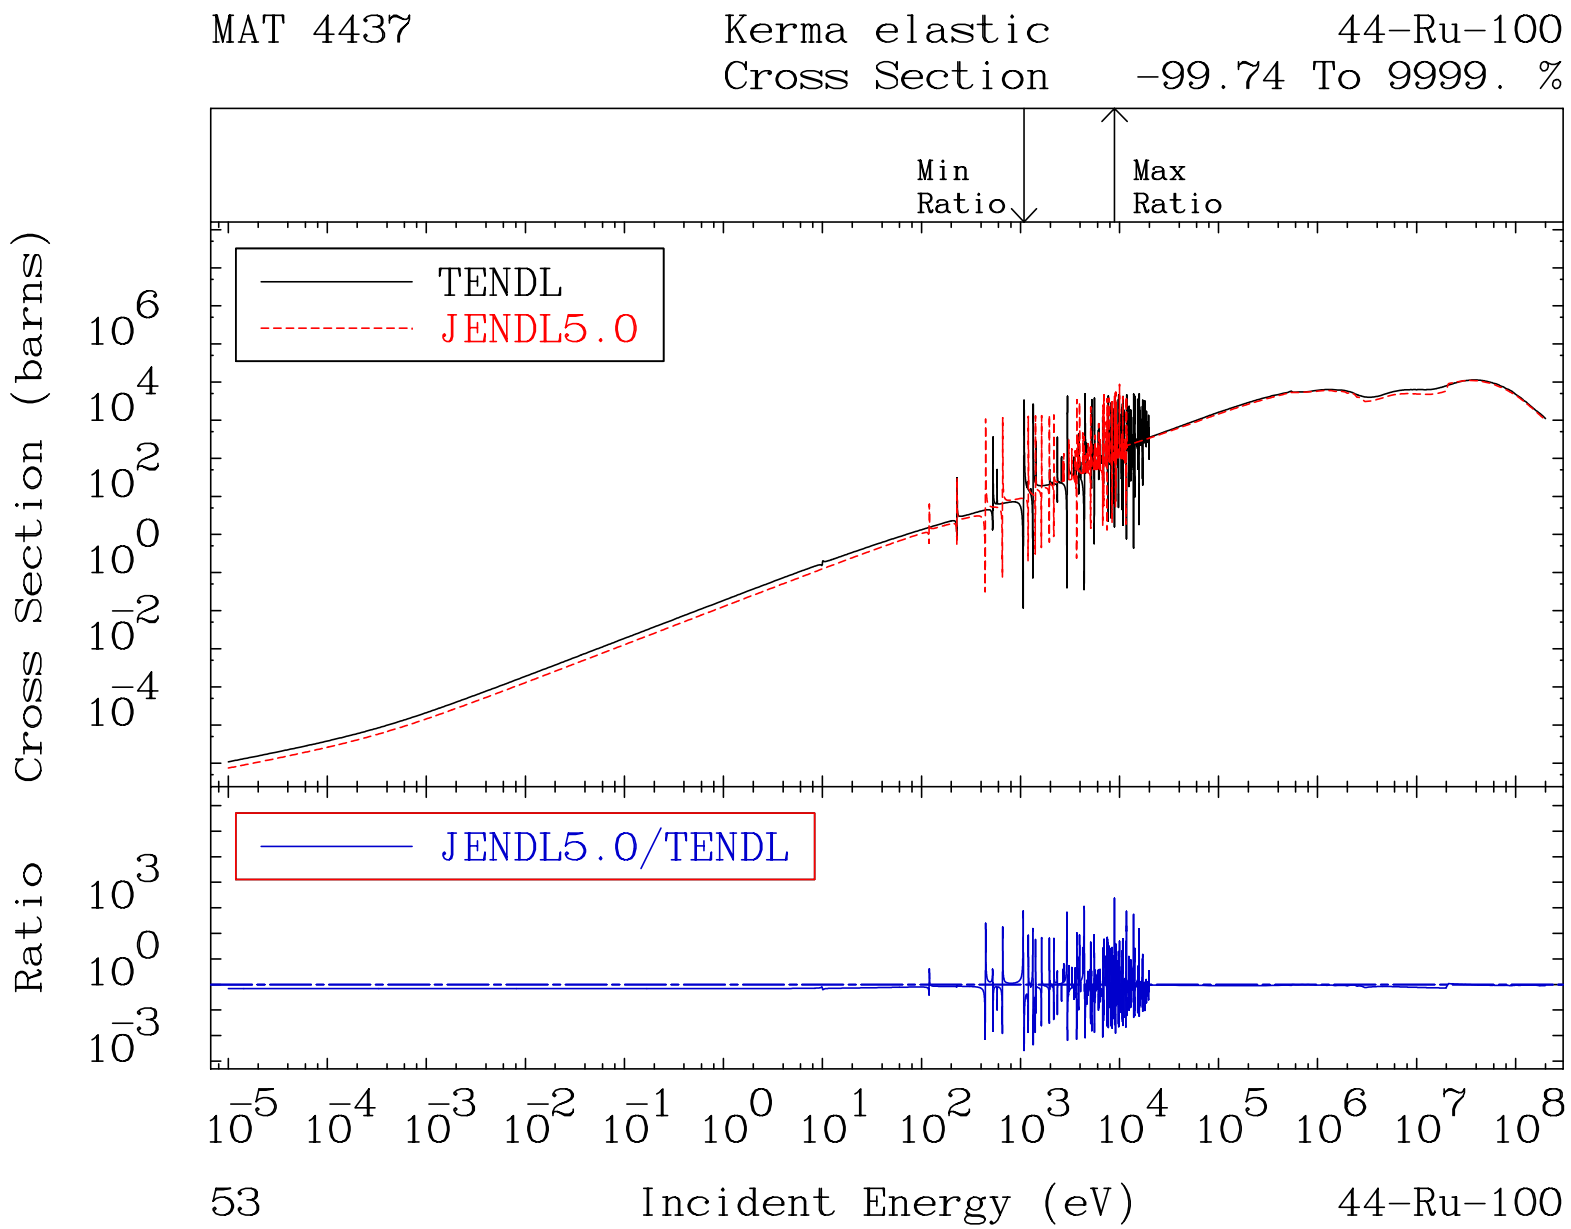
MAT 4437
Kerma elastic
Cross Section
44-Ru-100
-99.74 To 9999. %
Min Ratio
Max Ratio
TENDL
JENDL5.0
JENDL5.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
53
44-Ru-100

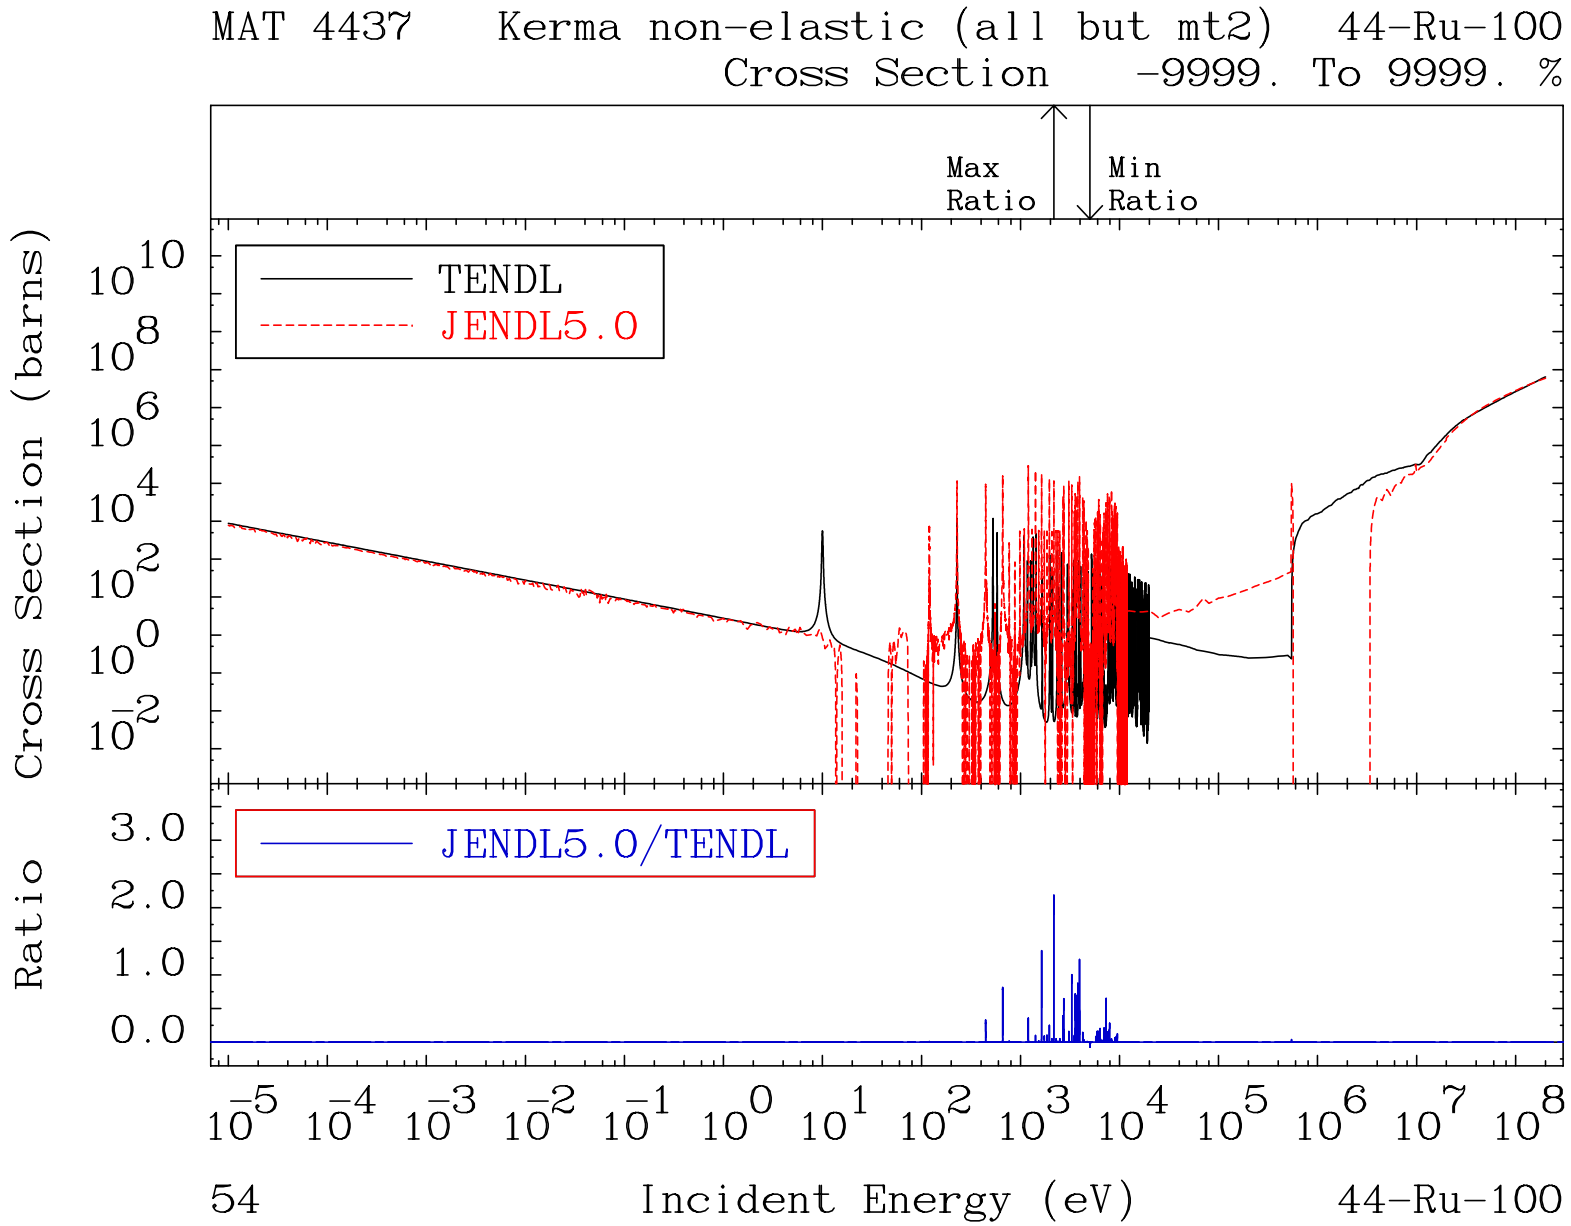
MAT 4437 Kerma non-elastic (all but mt2) 44-Ru-100
Cross Section -9999. To 9999. %
Max Ratio
Min Ratio
TENDL
JENDL5.0
Cross Section (barns)
JENDL5.0/TENDL
Ratio
Incident Energy (eV)
54
44-Ru-100

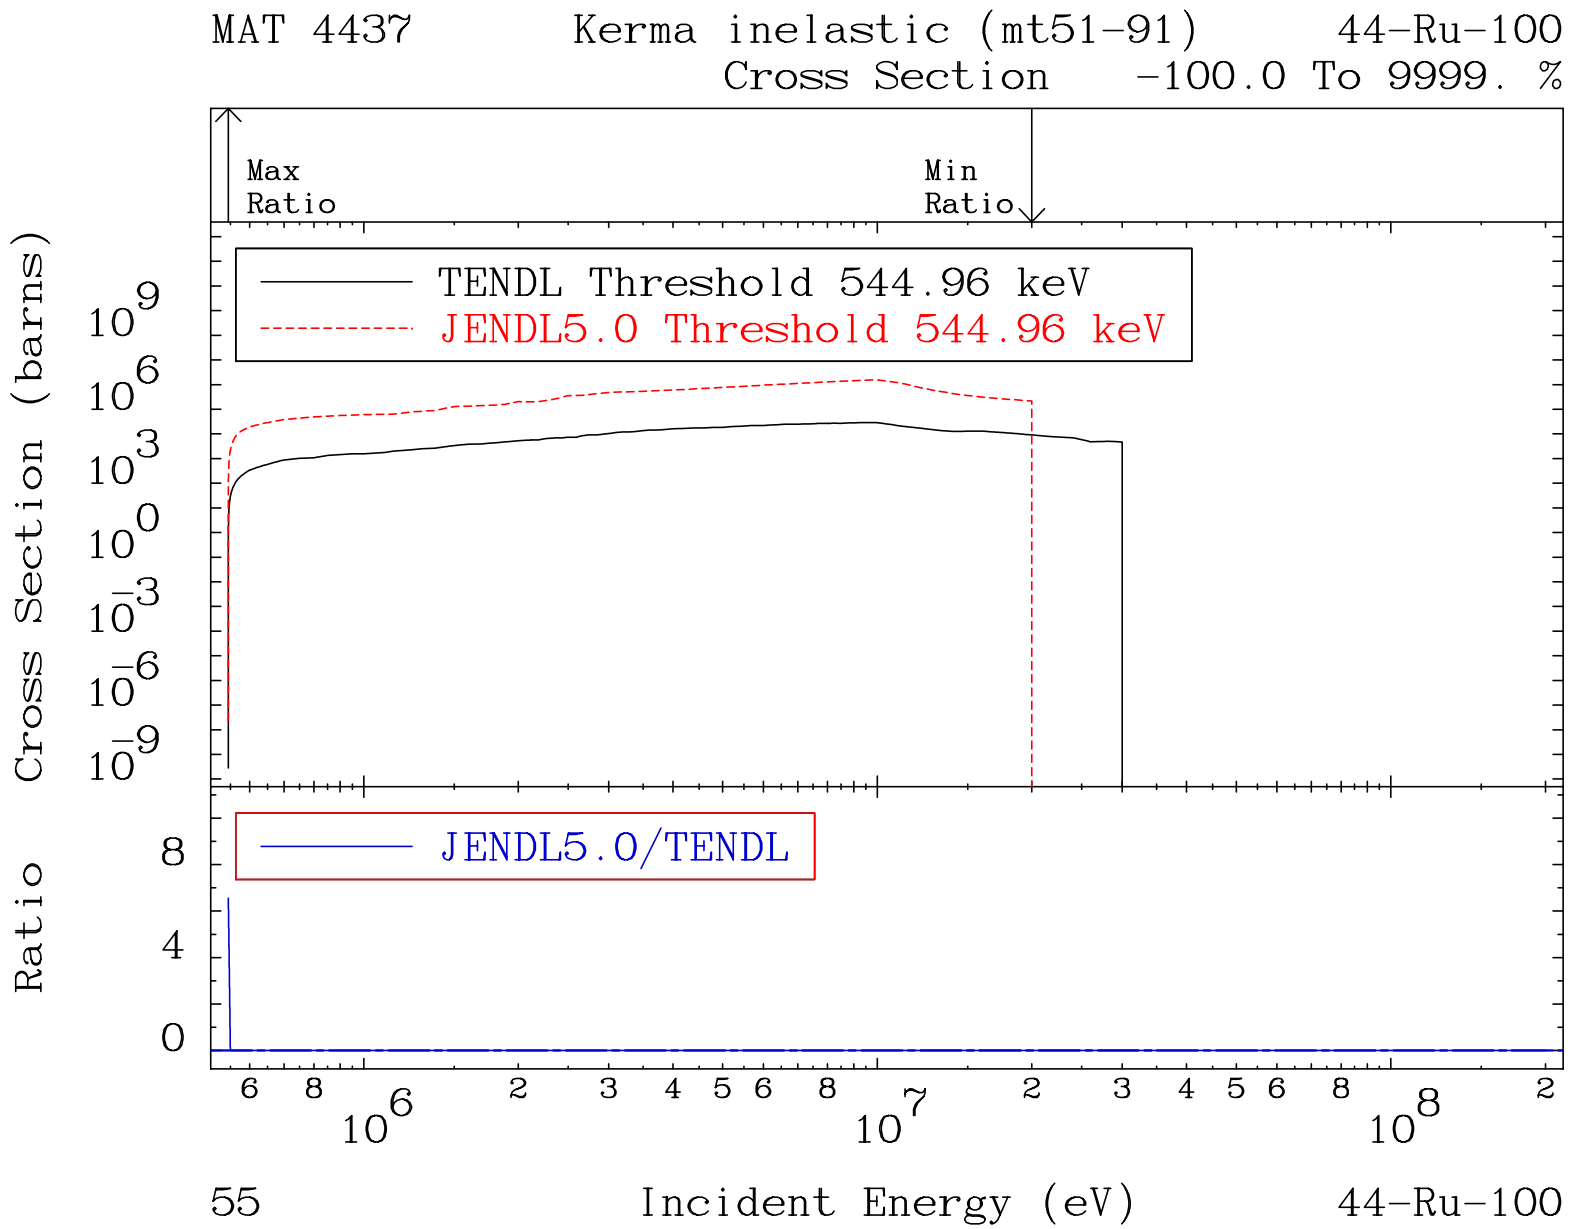
MAT 4437
Kerma inelastic (mt51-91)
44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL Threshold 544.96 keV
JENDL5.0 Threshold 544.96 keV
JENDL5.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
55
44-Ru-100

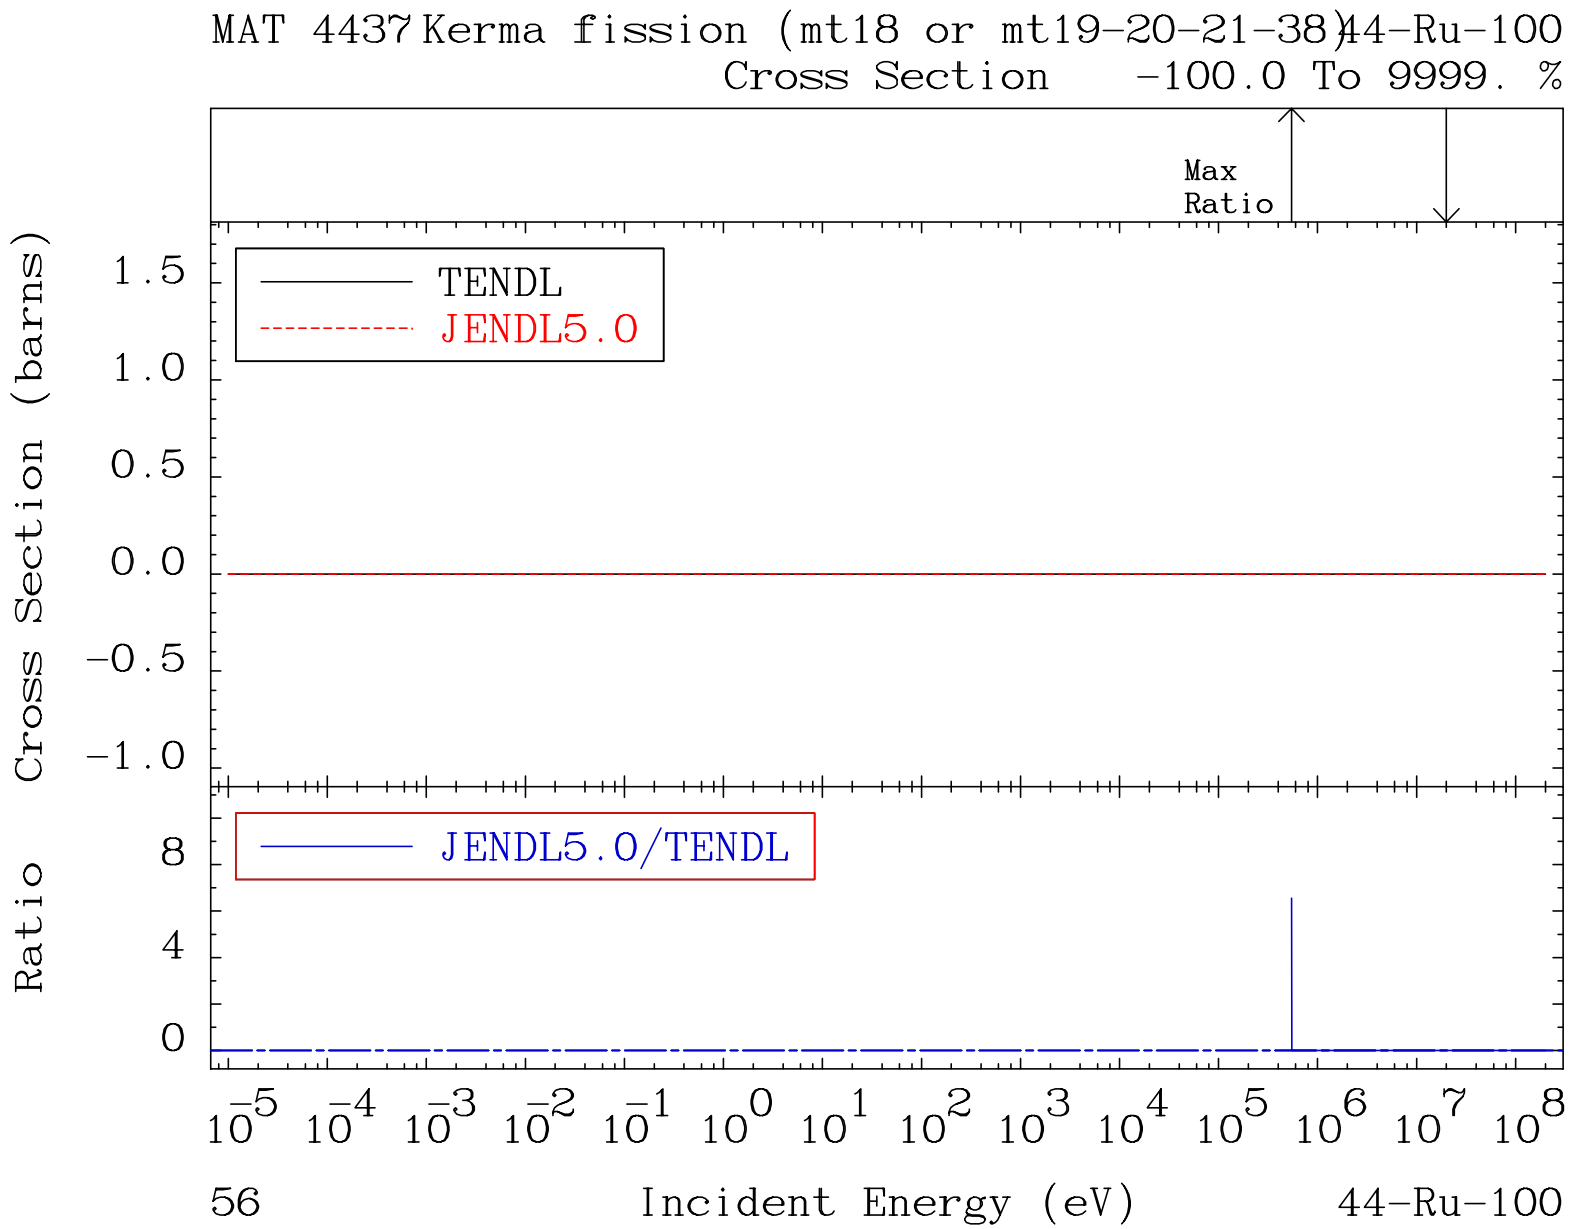
MAT 4437 Kerma fission (mt18 or mt19-20-21-38) 44-Ru-100
Cross Section -100.0 To 9999. %
Max
Ratio
TENDL
JENDL5.0
JENDL5.0/TENDL
Cross Section (barns)
Ratio
1.5
1.0
0.5
0.0
-0.5
-1.0
8
4
0
10^-5 10^-4 10^-3 10^-2 10^-1 10^0 10^1 10^2 10^3 10^4 10^5 10^6 10^7 10^8
56
Incident Energy (eV)
44-Ru-100

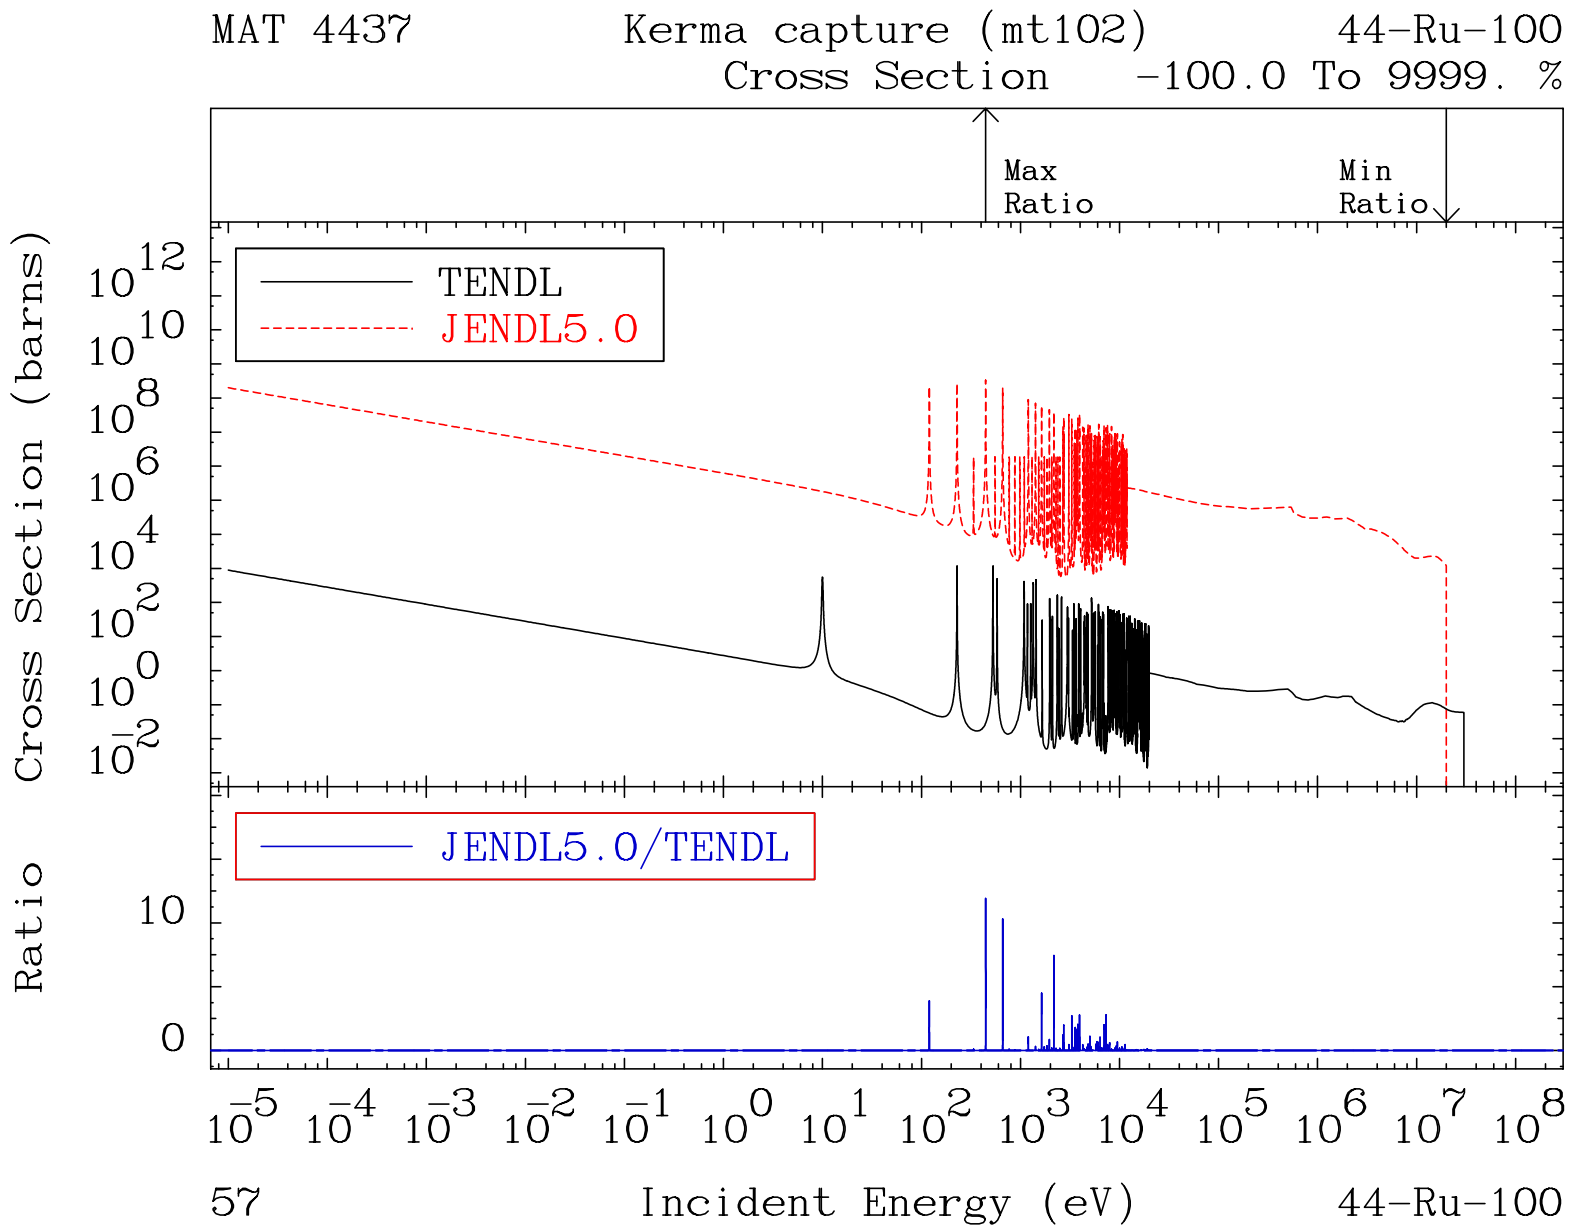
MAT 4437
Kerma capture (mt102)
44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JENDL5.0
Cross Section (barns)
JENDL5.0/TENDL
Ratio
Incident Energy (eV)
57
44-Ru-100

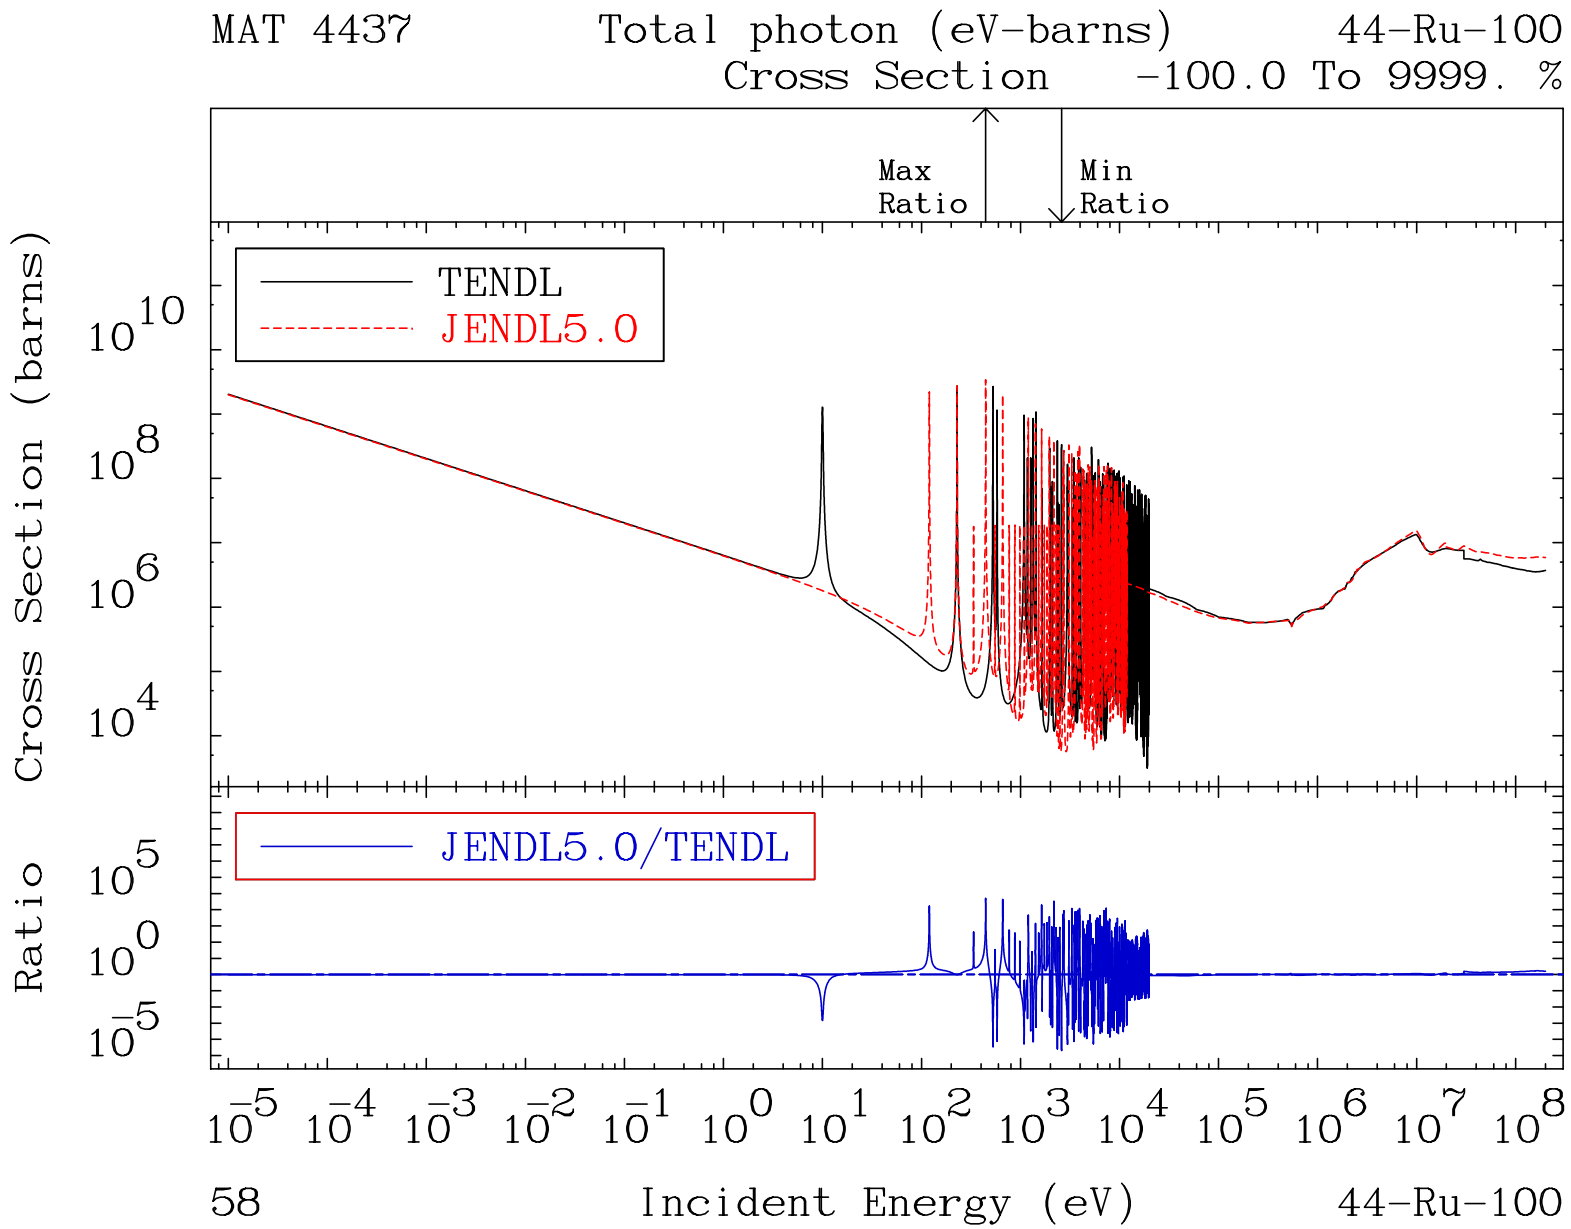
MAT 4437
Total photon (eV-barns)
44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JENDL5.0
Cross Section (barns)
JENDL5.0/TENDL
Ratio
Incident Energy (eV)
58
44-Ru-100

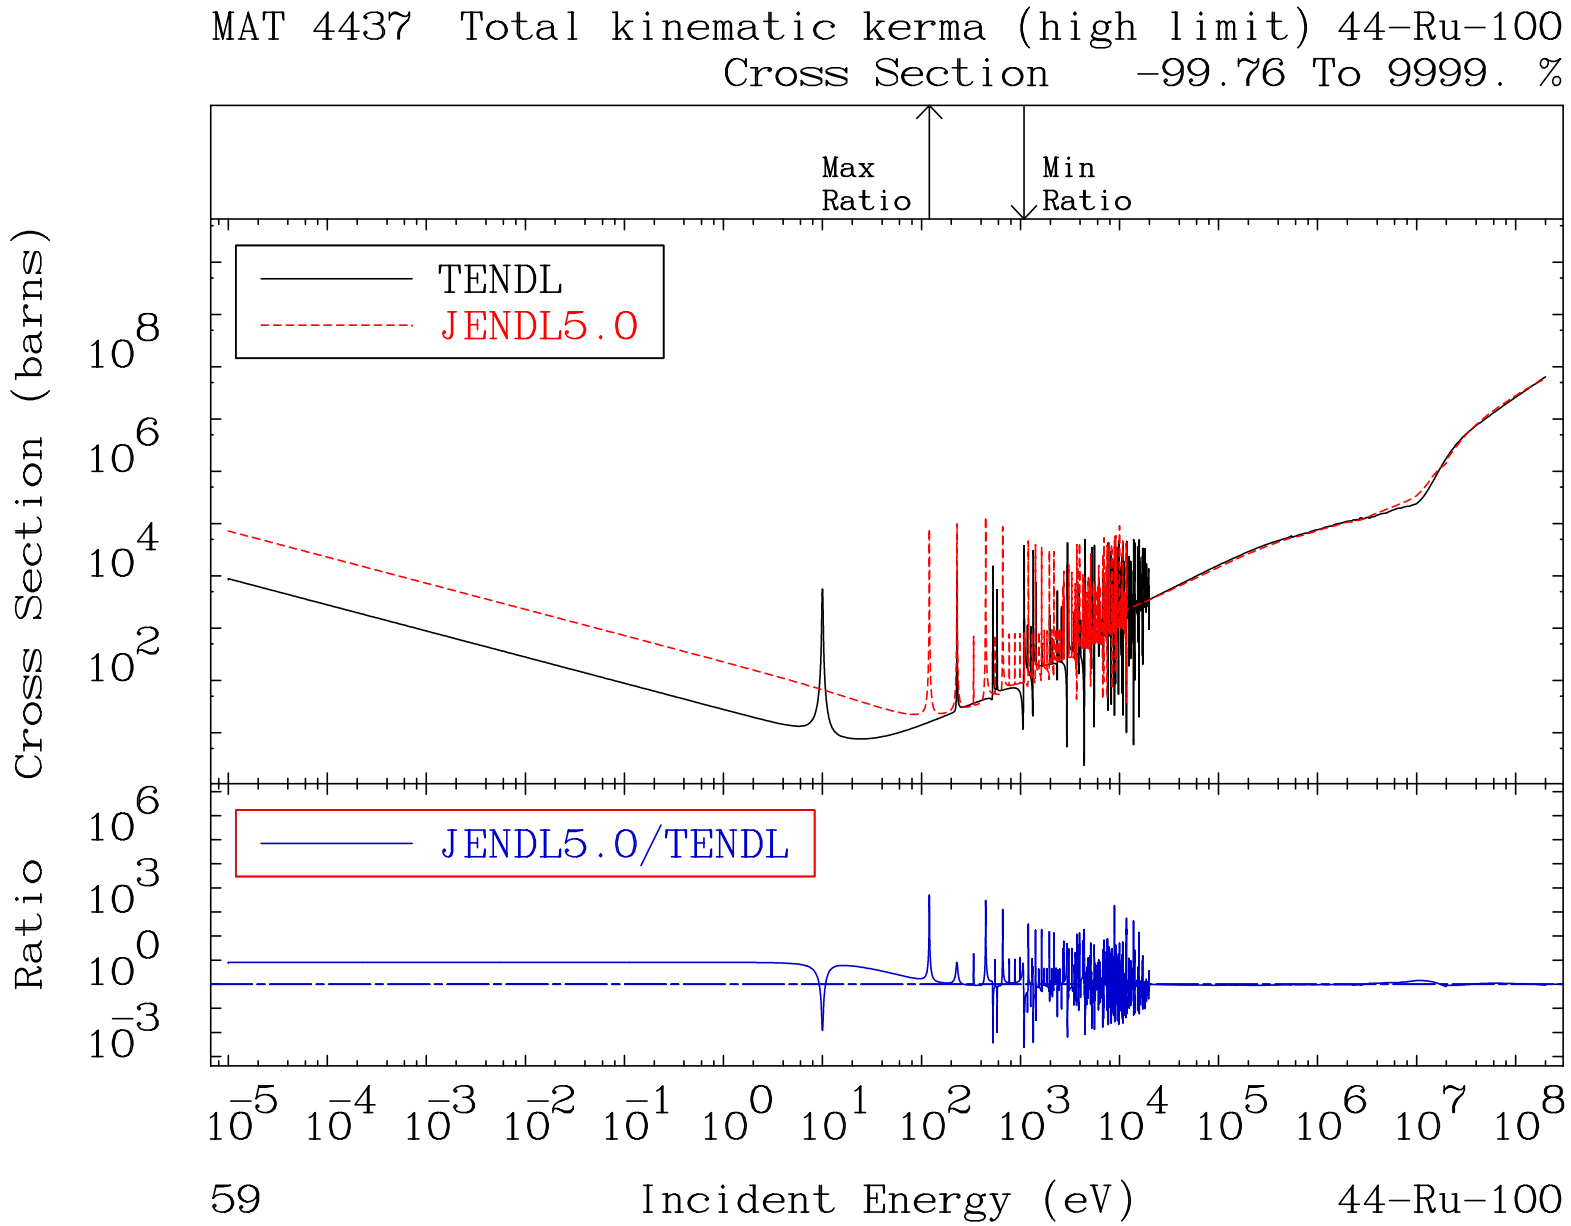
MAT 4437 Total kinematic kerma (high limit) 44-Ru-100
Cross Section -99.76 To 9999. %
Max Ratio
Min Ratio
TENDL
JENDL5.0
JENDL5.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
59
44-Ru-100

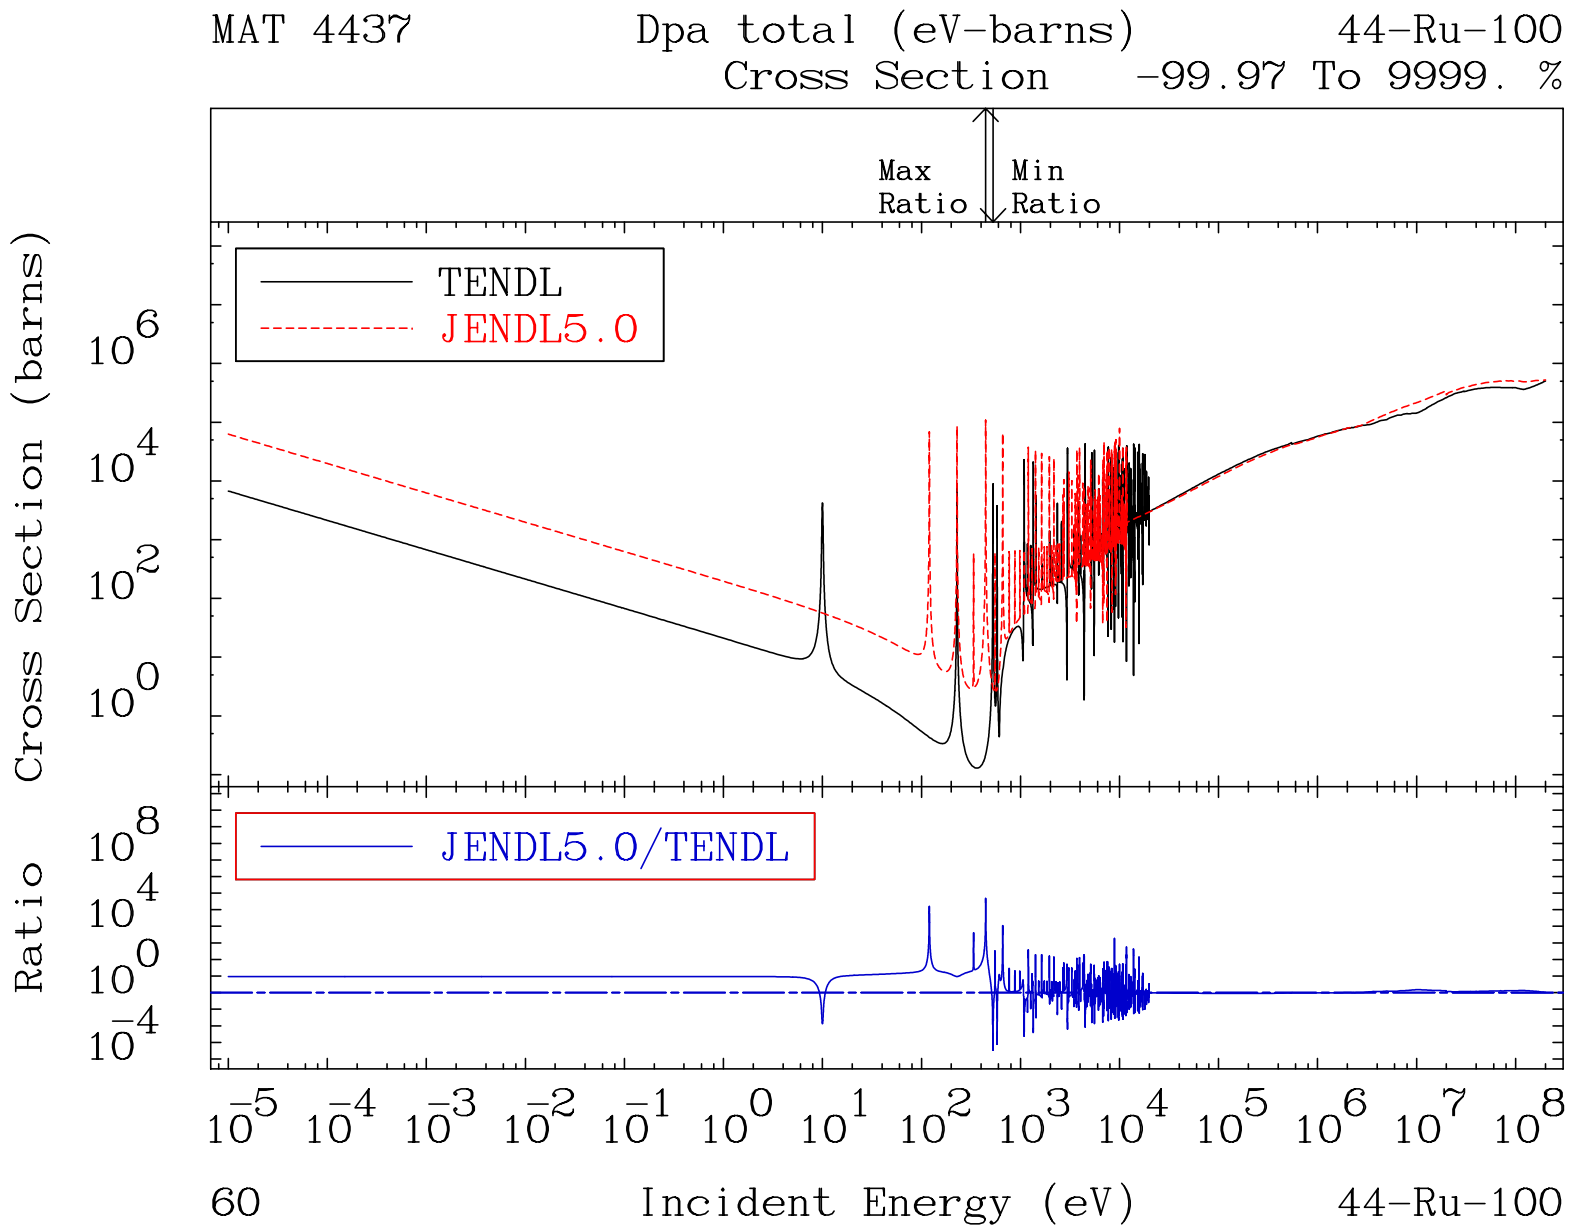
MAT 4437
Dpa total (eV-barns)
44-Ru-100
Cross Section
-99.97 To 9999. %
Max Ratio
Min Ratio
TENDL
JENDL5.0
Cross Section (barns)
JENDL5.0/TENDL
Ratio
Incident Energy (eV)
60
44-Ru-100

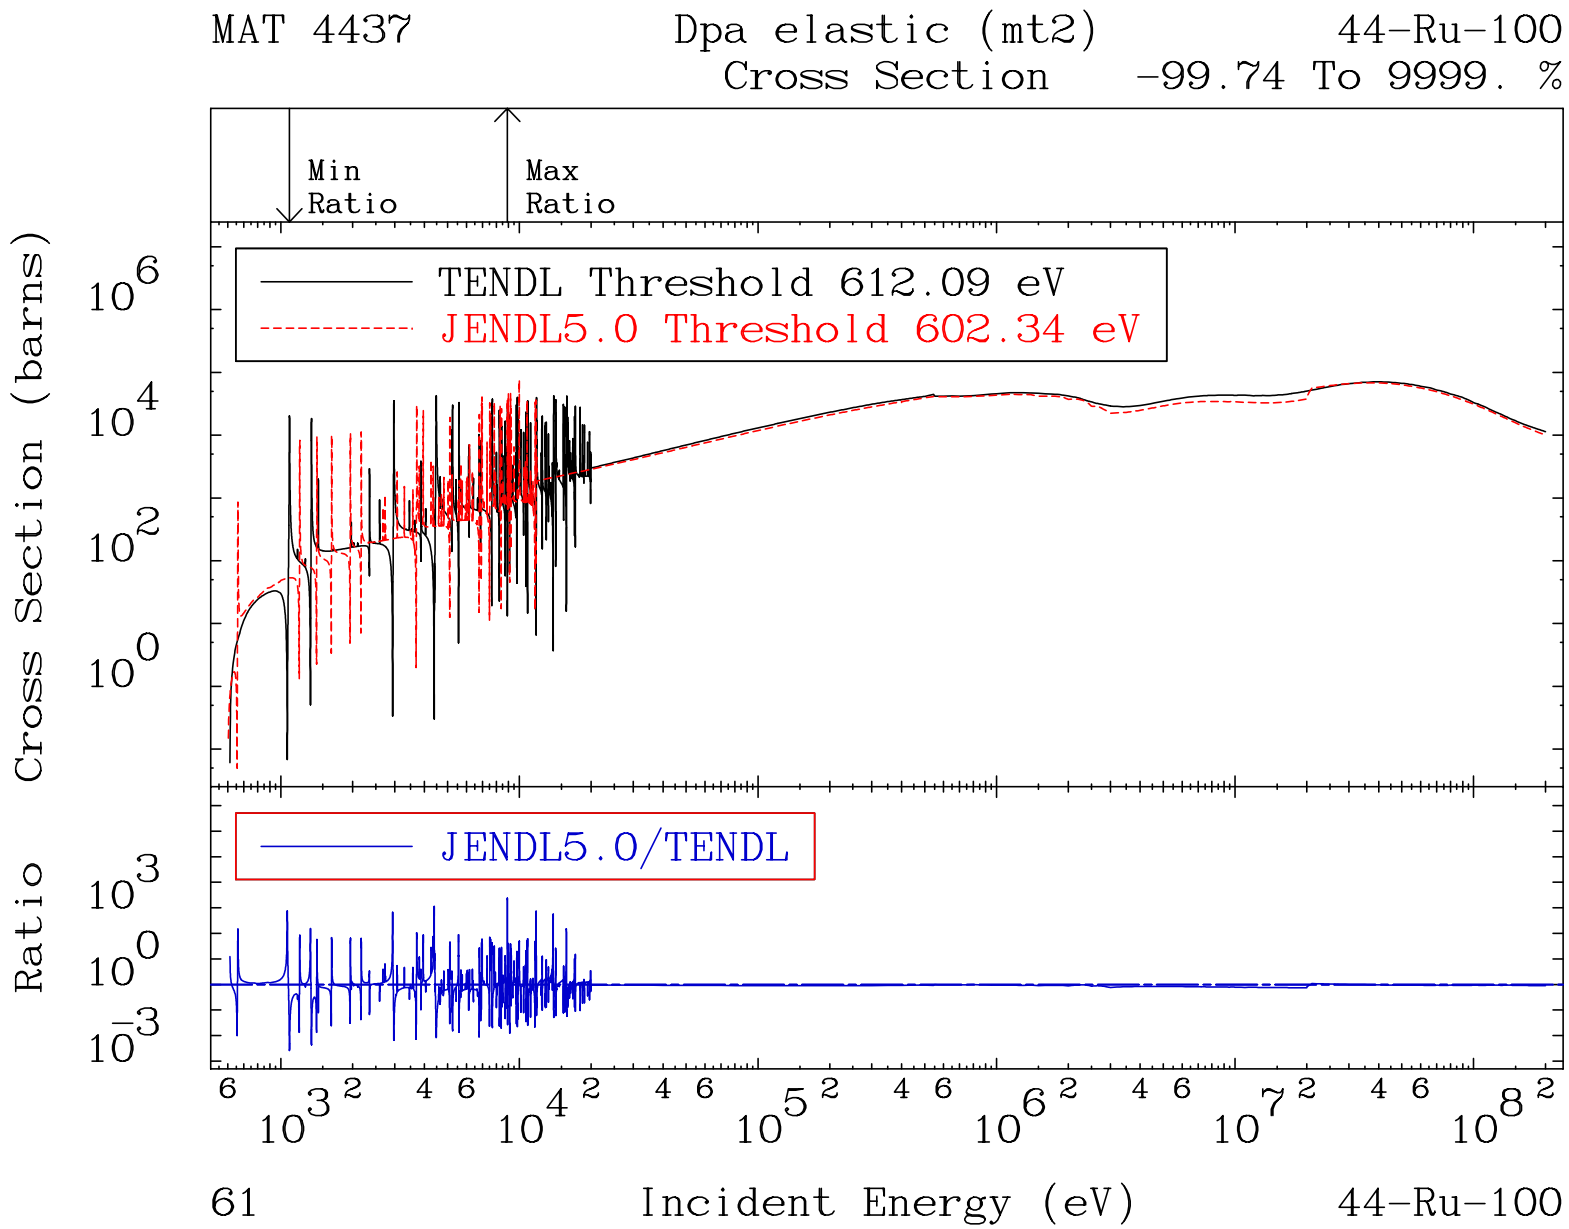
MAT 4437
Dpa elastic (mt2)
Cross Section
44-Ru-100
-99.74 To 9999. %
Min Ratio
Max Ratio
TENDL Threshold 612.09 eV
JENDL5.0 Threshold 602.34 eV
JENDL5.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
61
44-Ru-100

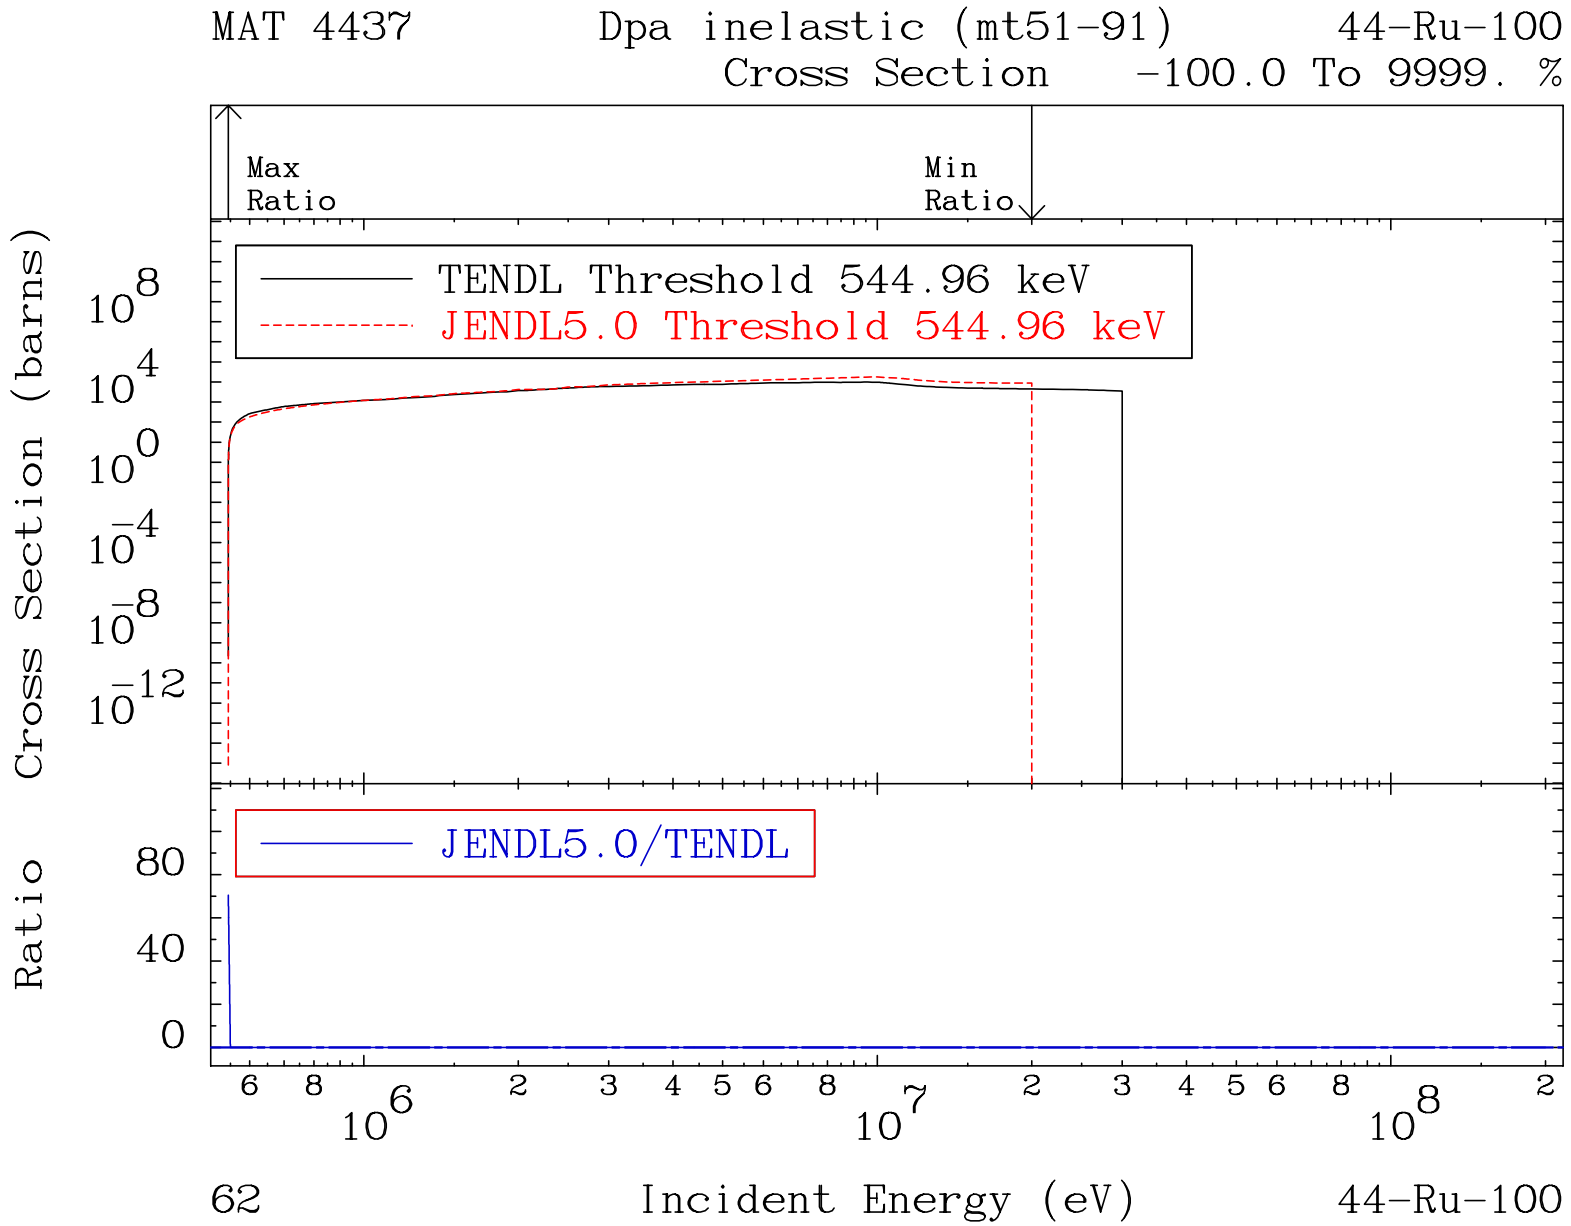
MAT 4437
Dpa inelastic (mt51-91)
44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL Threshold 544.96 keV
JENDL5.0 Threshold 544.96 keV
JENDL5.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
62
44-Ru-100

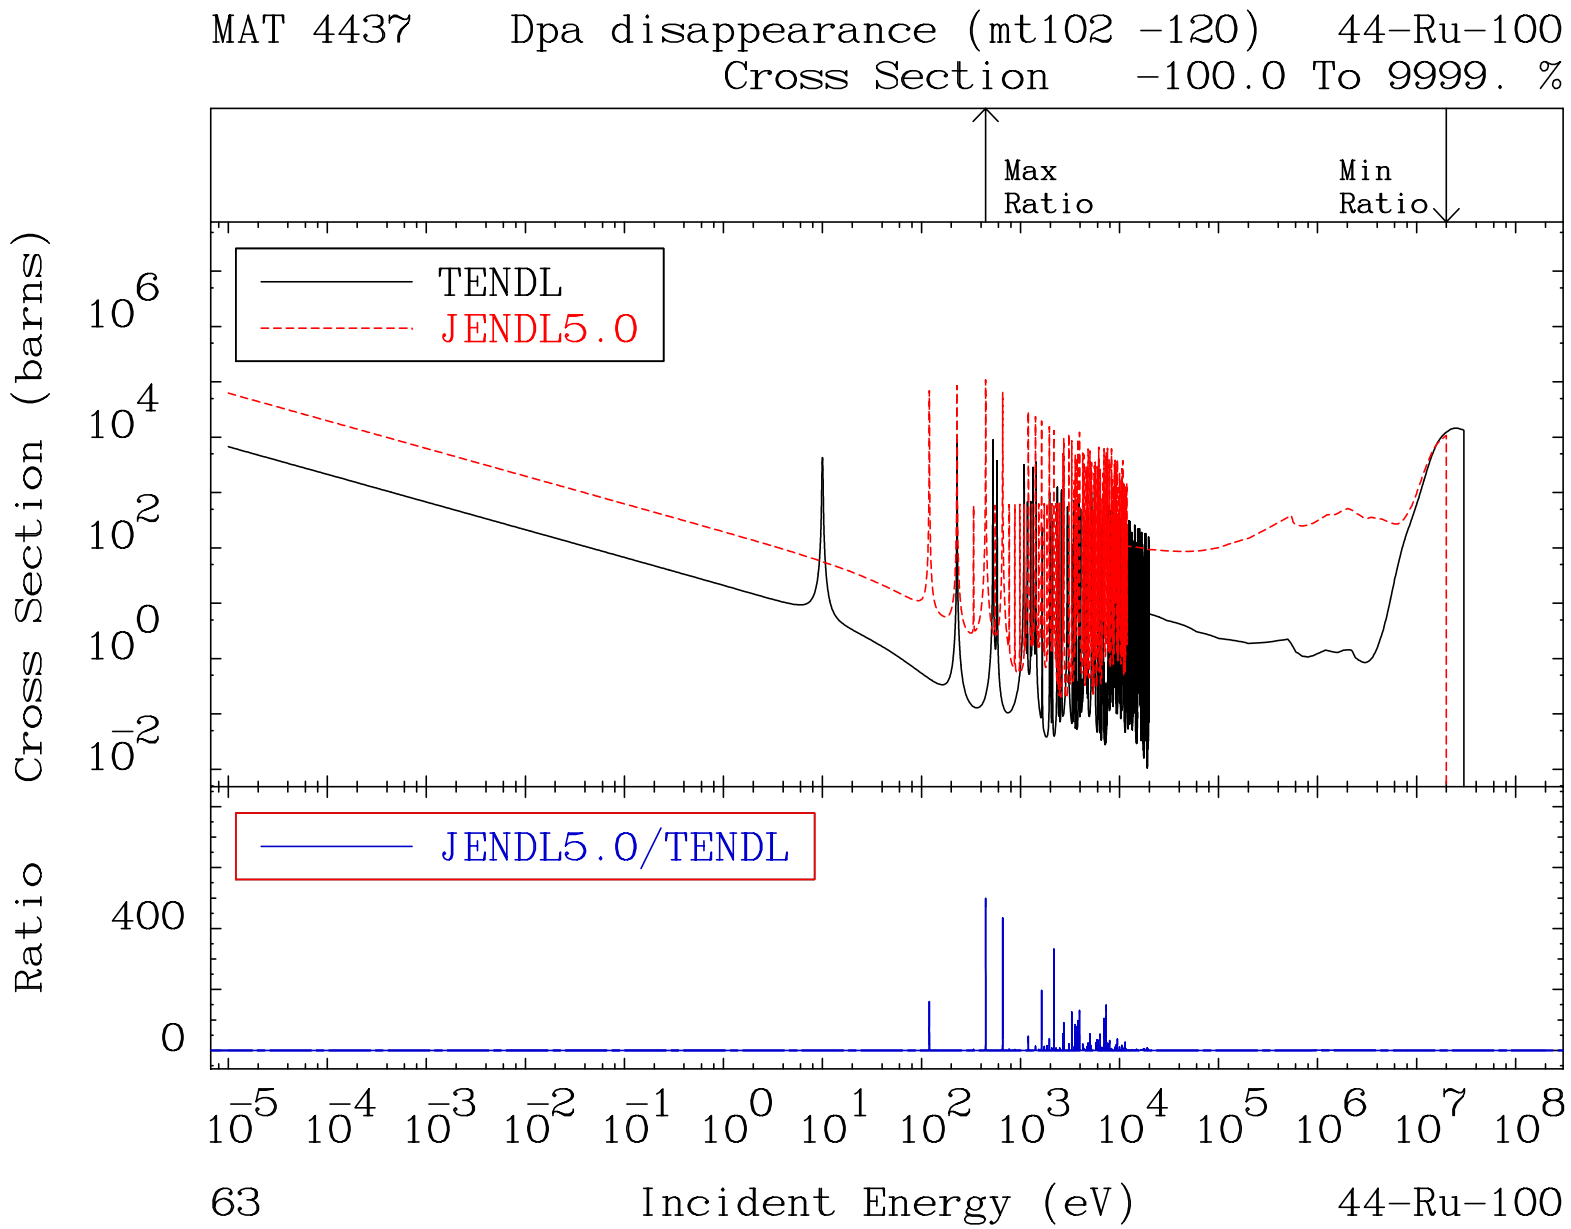
MAT 4437 Dpa disappearance (mt102 -120) 44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JENDL5.0
Cross Section (barns)
JENDL5.0/TENDL
Ratio
400
0
Incident Energy (eV)
63
44-Ru-100

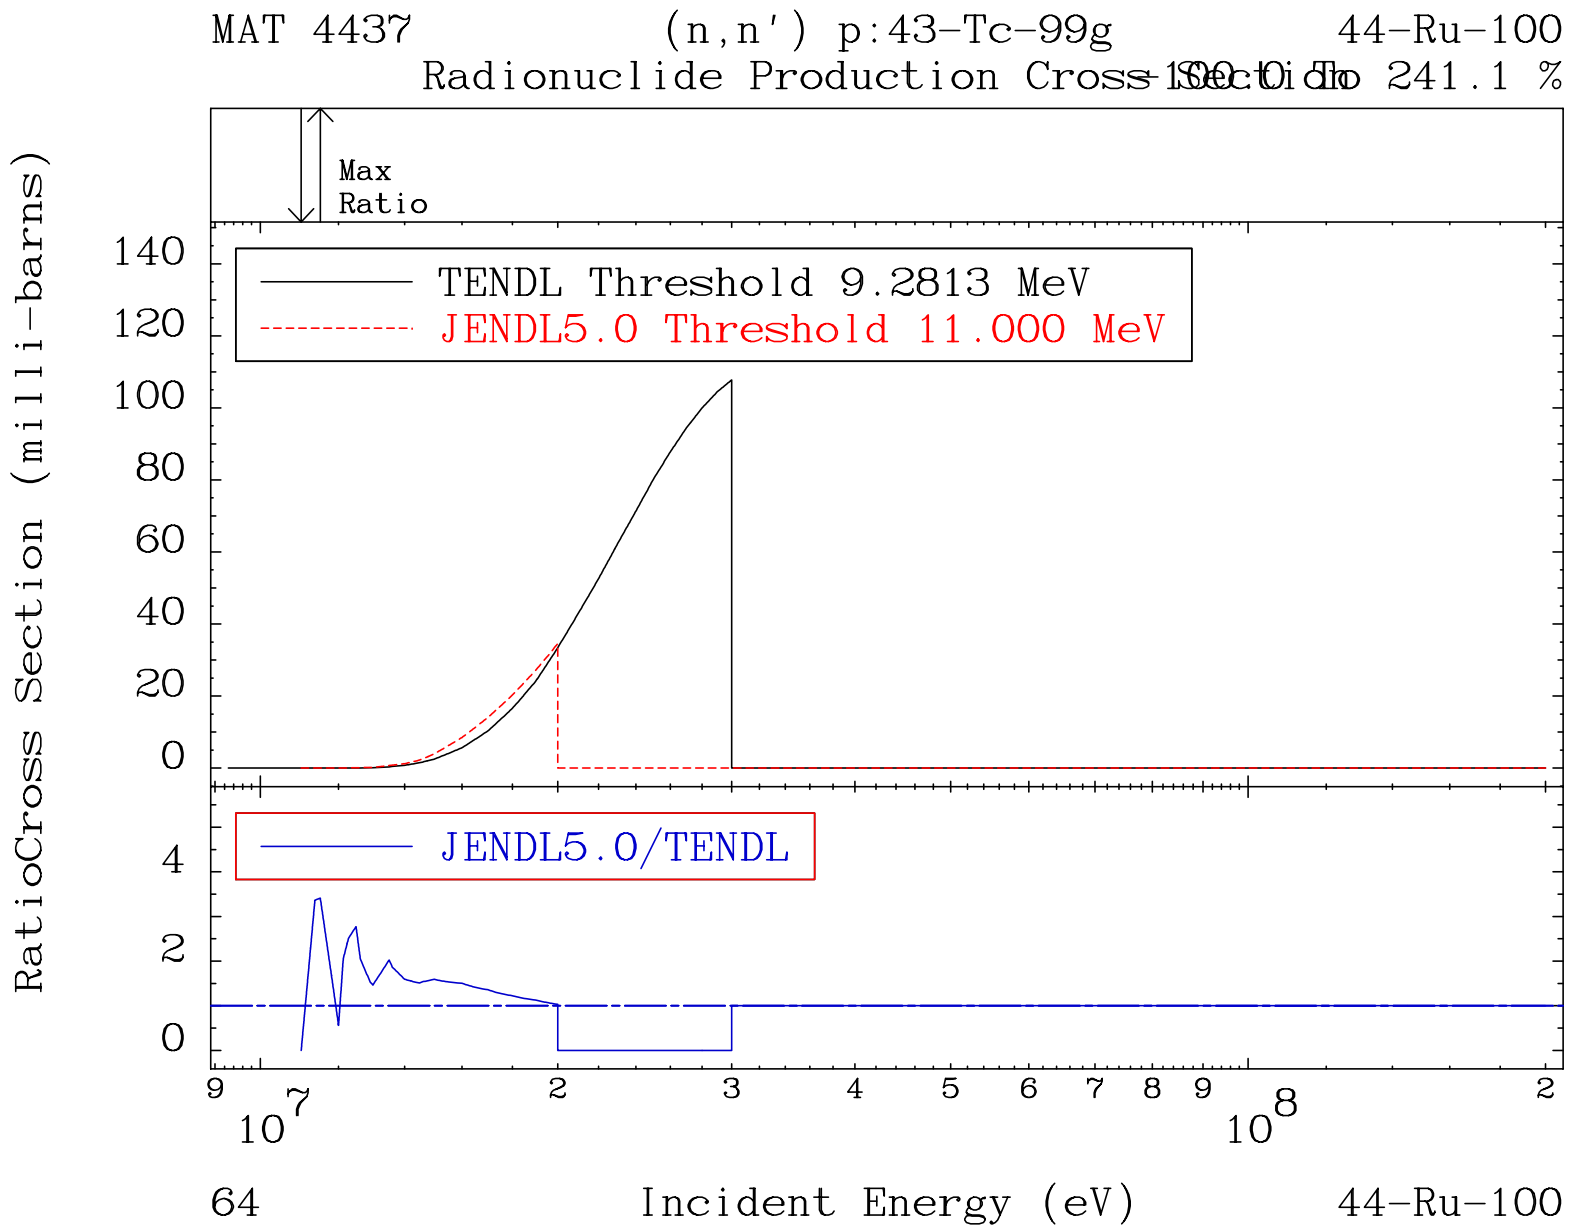
MAT 4437
(n,n') p:43-Tc-99g
44-Ru-100
Radionuclide Production Cross Section To
Max
Ratio
TENDL Threshold 9.2813 MeV
JENDL5.0 Threshold 11.000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
64
44-Ru-100

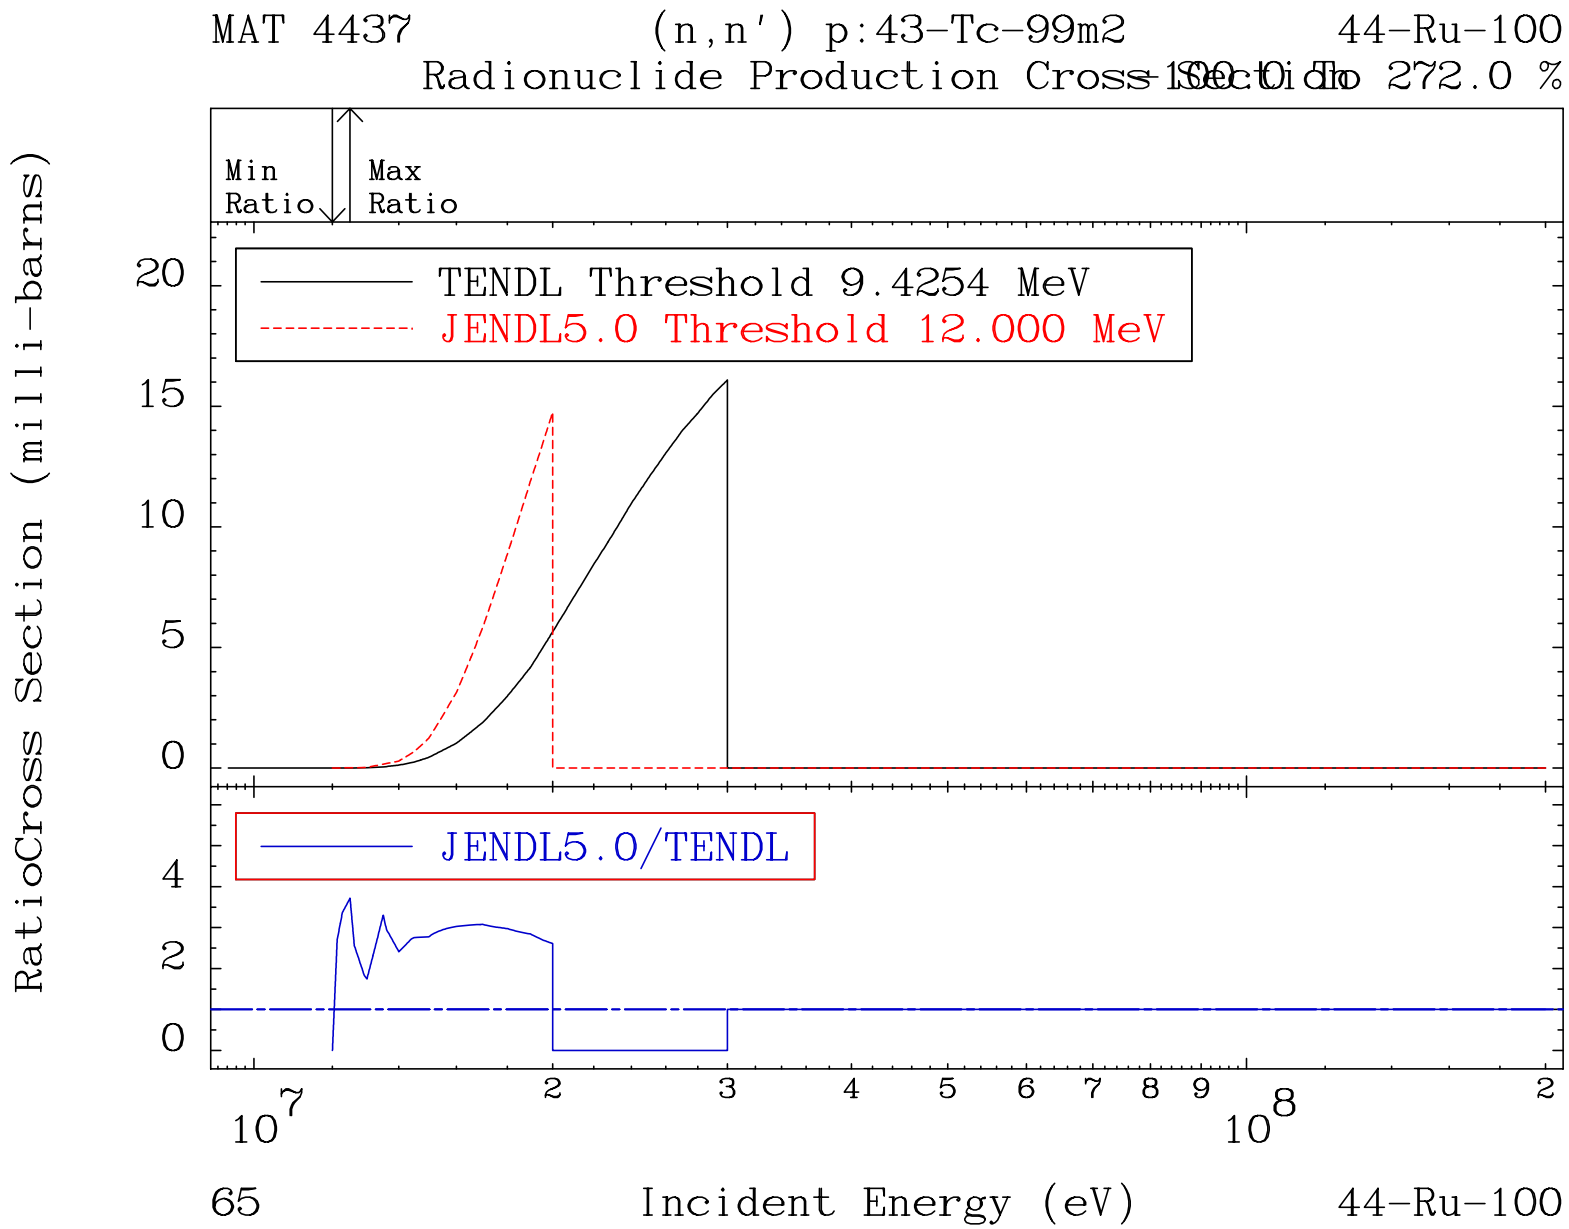
MAT 4437
(n,n') p:43-Tc-99m2
44-Ru-100
Radionuclide Production Cross Section
Min Ratio
Max Ratio
TENDL Threshold 9.4254 MeV
JENDL5.0 Threshold 12.000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
65
44-Ru-100

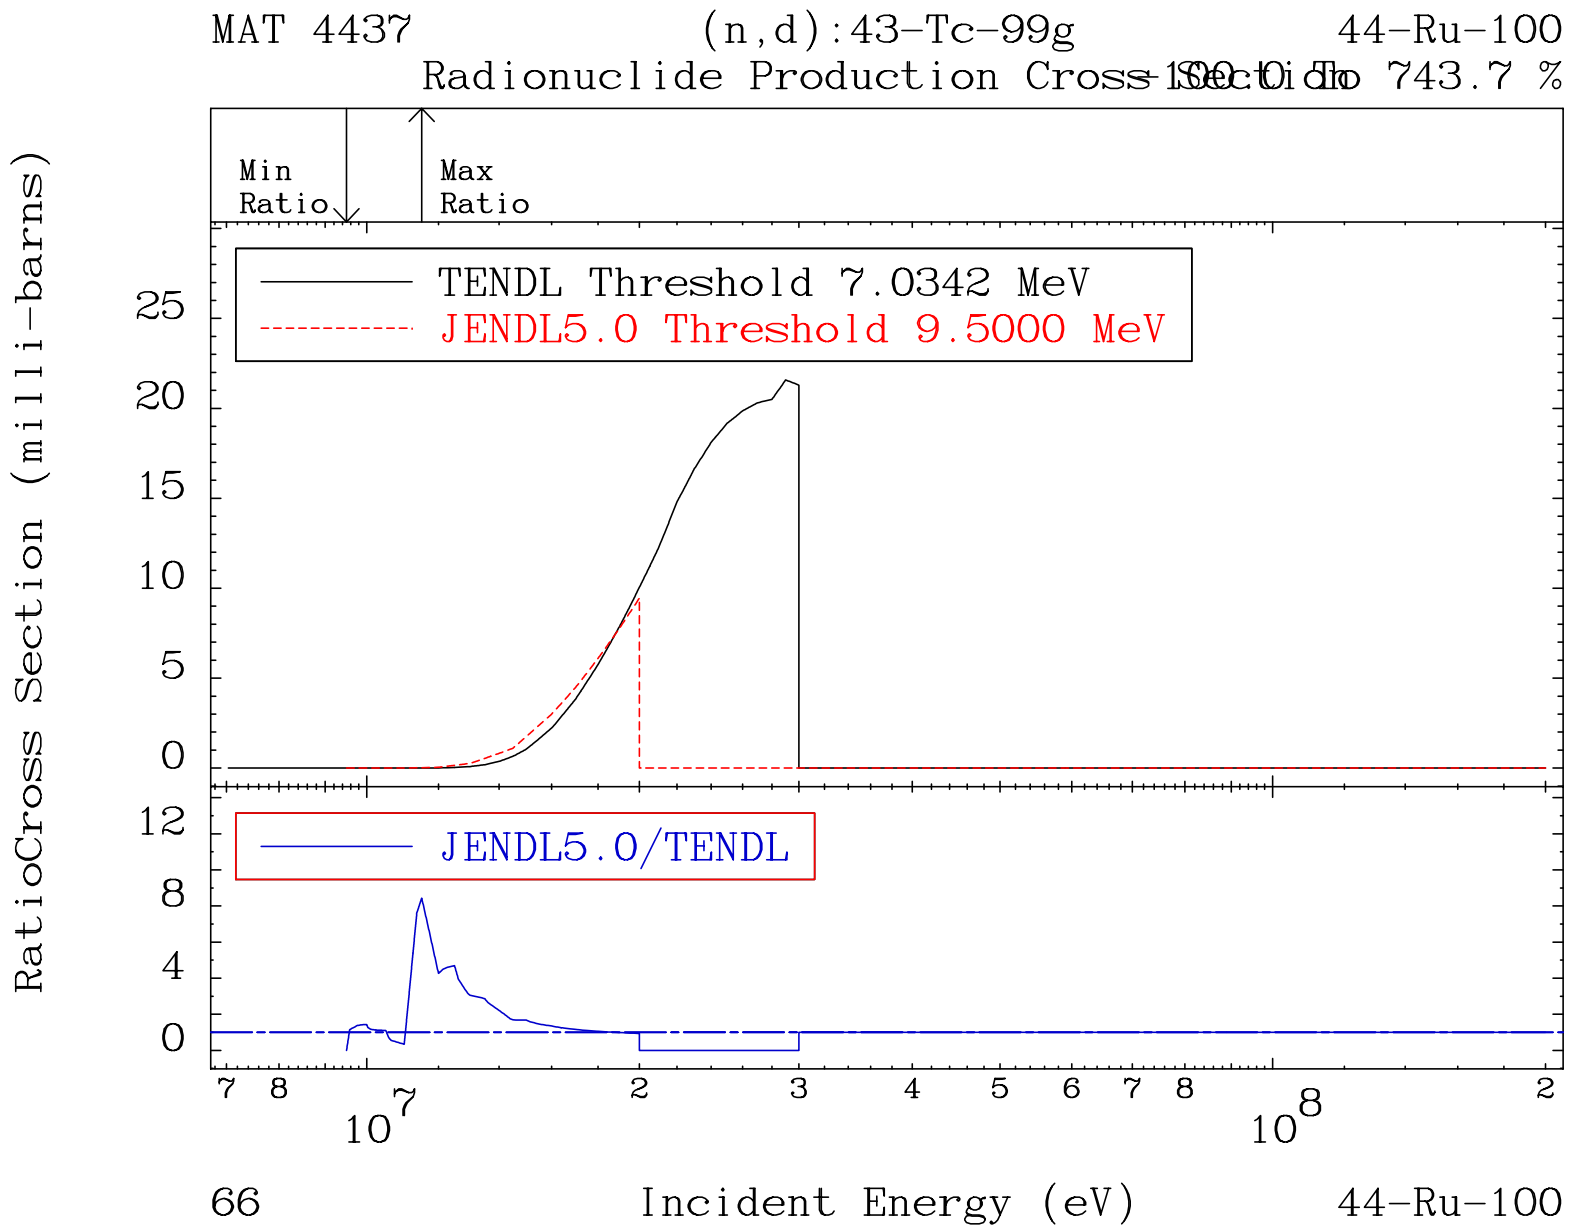
MAT 4437
(n,d):43-Tc-99g
44-Ru-100
Radionuclide Production Cross Section To 743.7 %
Min Ratio
Max Ratio
TENDL Threshold 7.0342 MeV
JENDL5.0 Threshold 9.5000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
66
44-Ru-100

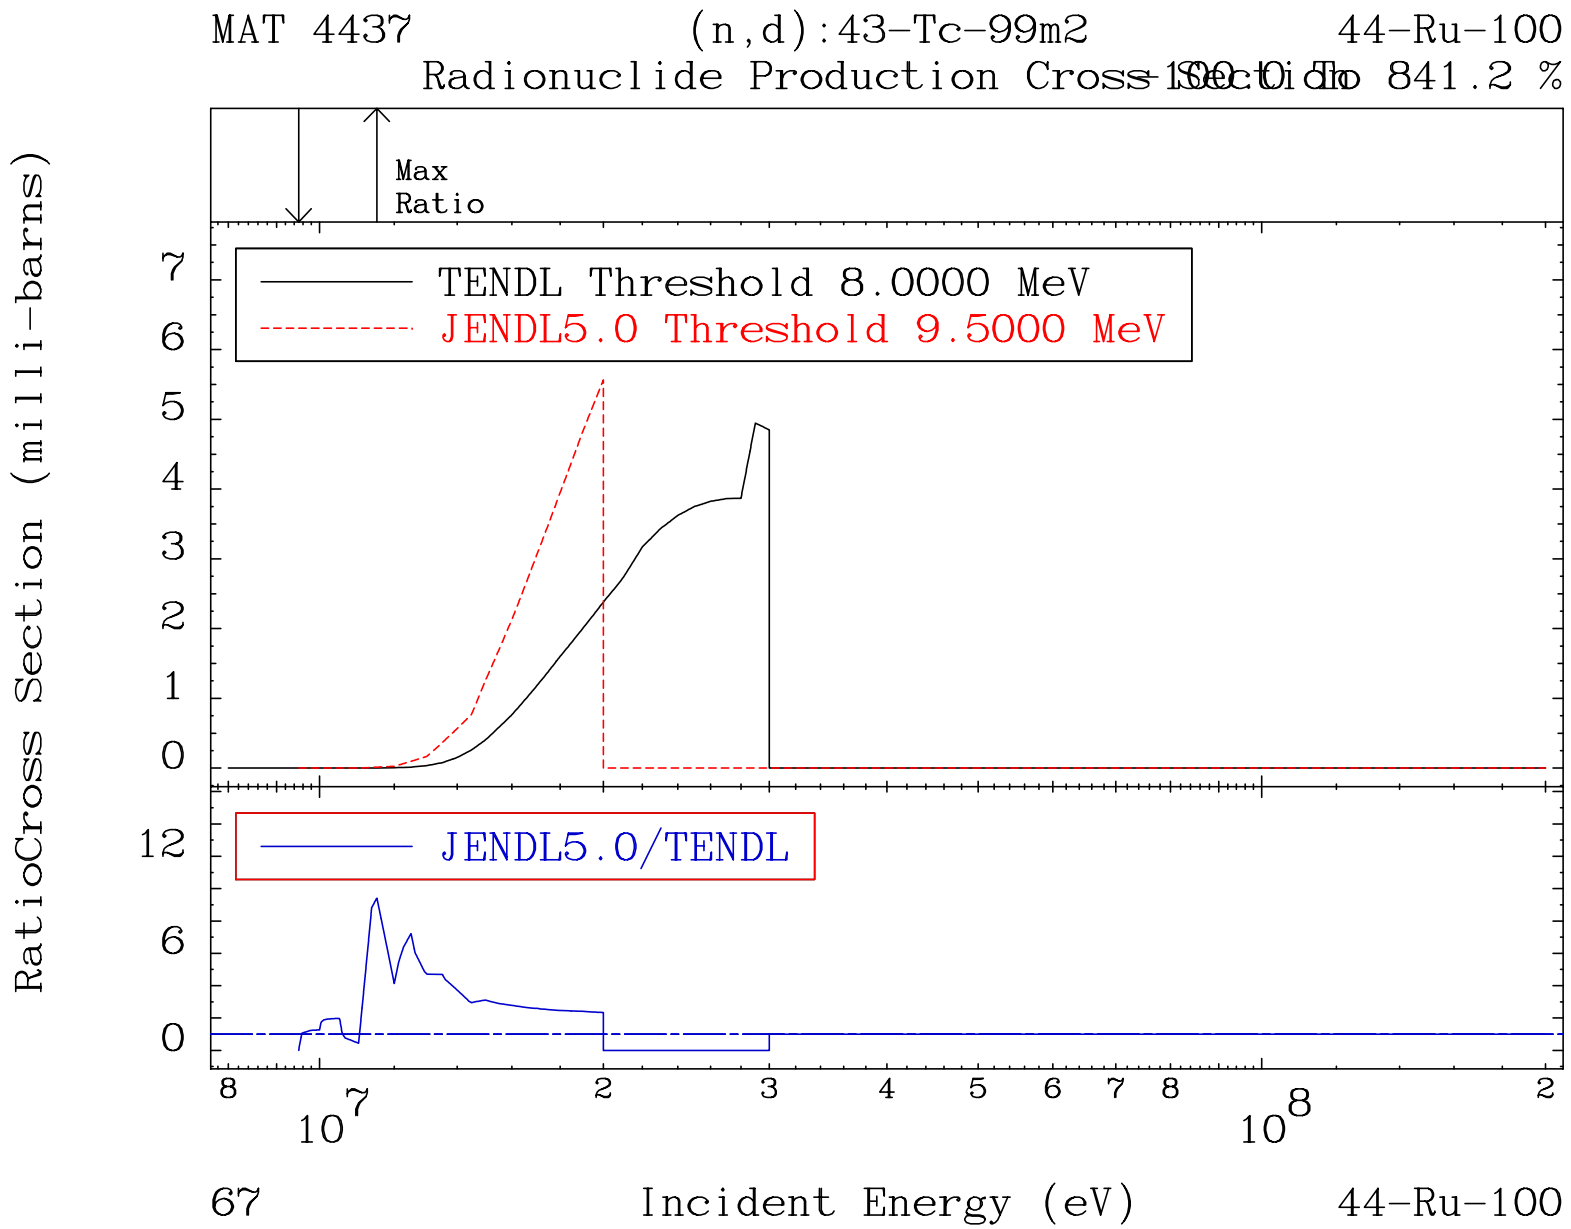
MAT 4437
(n,d):43-Tc-99m2
44-Ru-100
Radionuclide Production Cross Section To 841.2 %
Max
Ratio
TENDL Threshold 8.0000 MeV
JENDL5.0 Threshold 9.5000 MeV
JENDL5.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
67
44-Ru-100

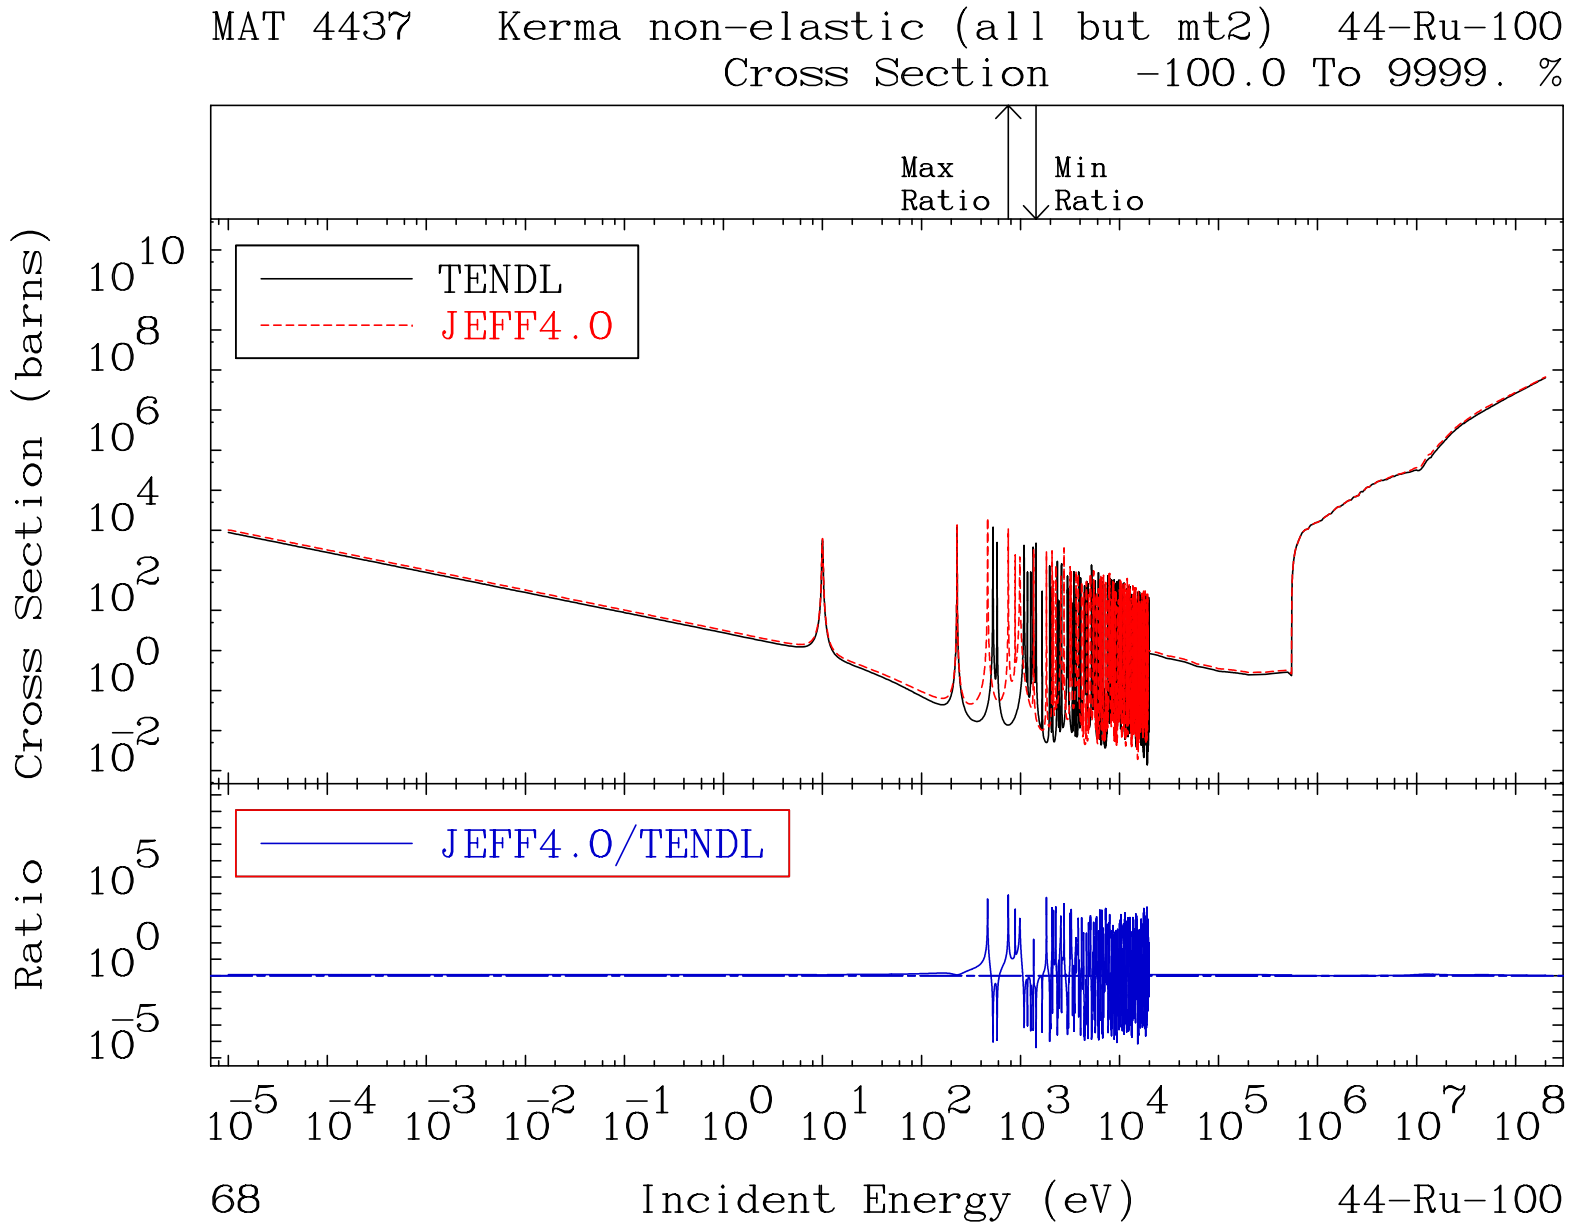
MAT 4437 Kerma non-elastic (all but mt2) 44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JEFF4.0
JEFF4.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
68
44-Ru-100

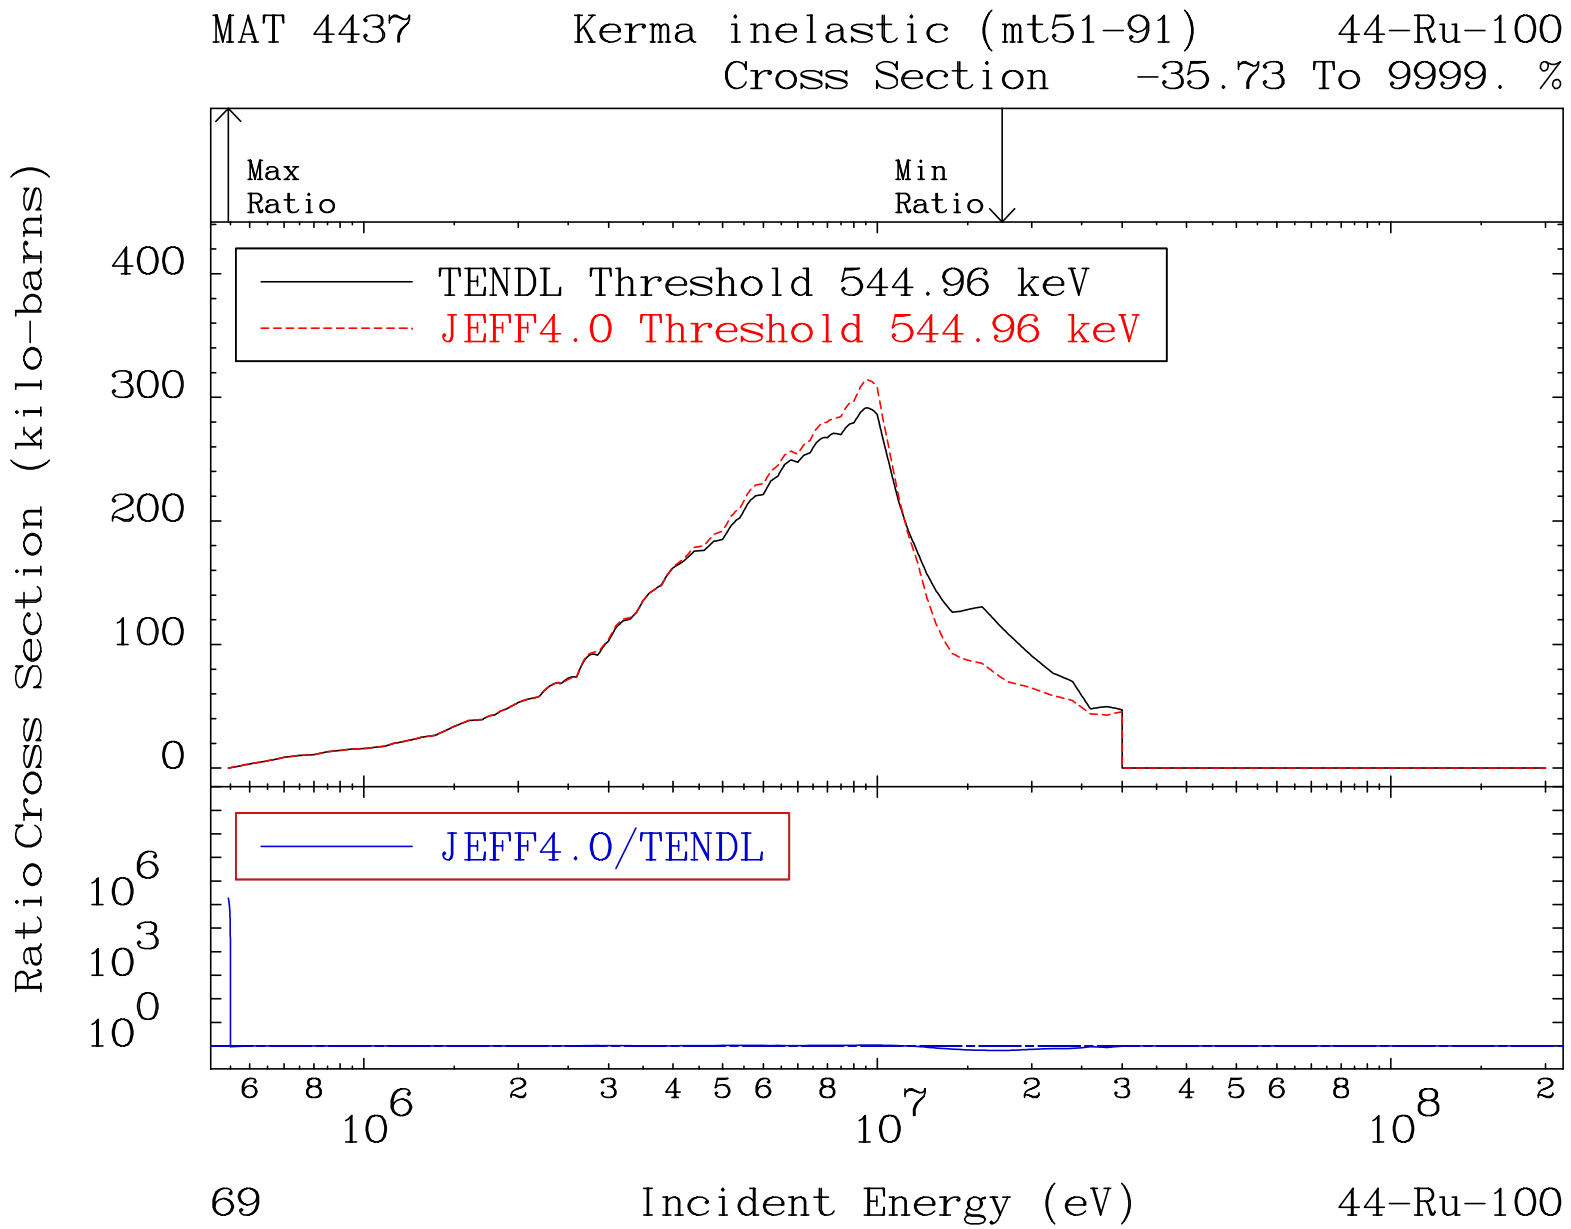
MAT 4437
Kerma inelastic (mt51-91)
44-Ru-100
Cross Section
-35.73 To 9999. %
Max Ratio
Min Ratio
TENDL Threshold 544.96 keV
JEFF4.0 Threshold 544.96 keV
JEFF4.0/TENDL
Ratio Cross Section (kilo-barns)
400
300
200
100
0
10^6
10^3
10^0
6 8 10^6 2 3 4 5 6 8 10^7 2 3 4 5 6 8 10^8 2
69
Incident Energy (eV)
44-Ru-100

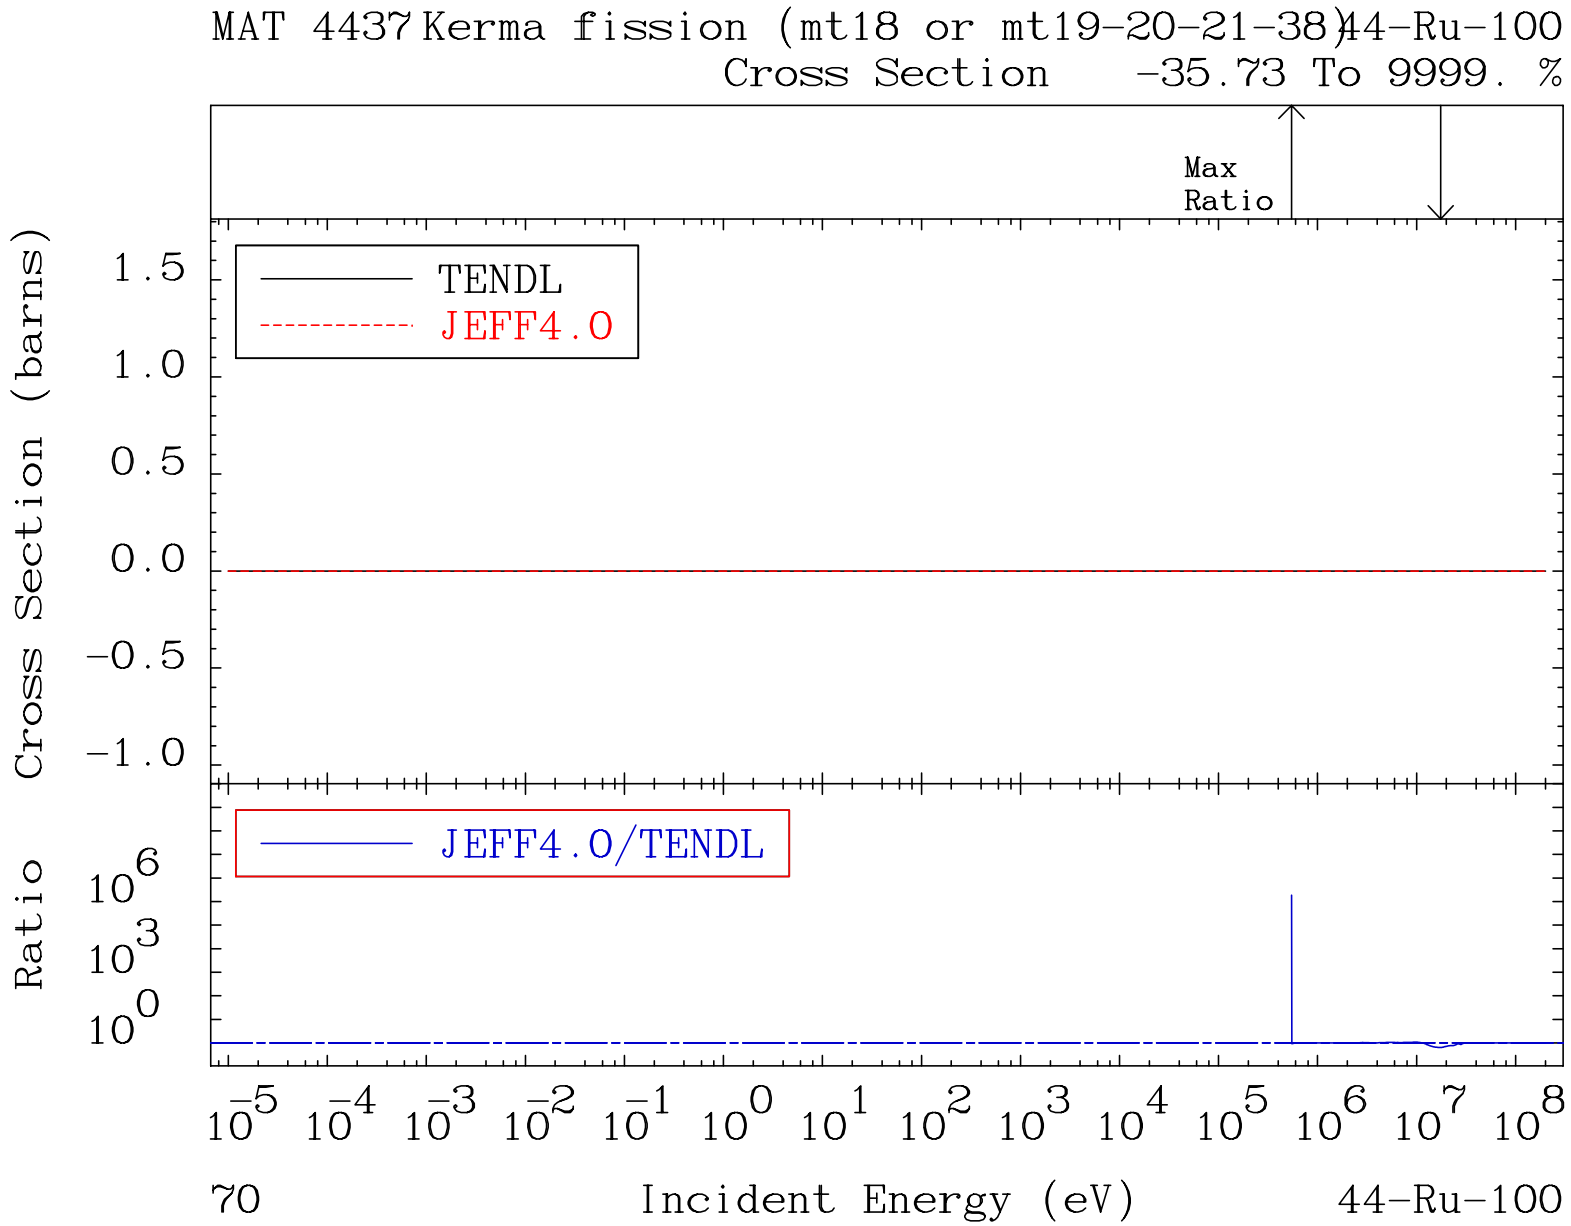
MAT 4437 Kerma fission (mt18 or mt19-20-21-38) 44-Ru-100
Cross Section -35.73 To 9999. %
Max
Ratio
TENDL
JEFF4.0
JEFF4.0/TENDL
Cross Section (barns)
Ratio
1.5
1.0
0.5
0.0
-0.5
-1.0
10^6
10^3
10^0
10^-5 10^-4 10^-3 10^-2 10^-1 10^0 10^1 10^2 10^3 10^4 10^5 10^6 10^7 10^8
70
Incident Energy (eV)
44-Ru-100

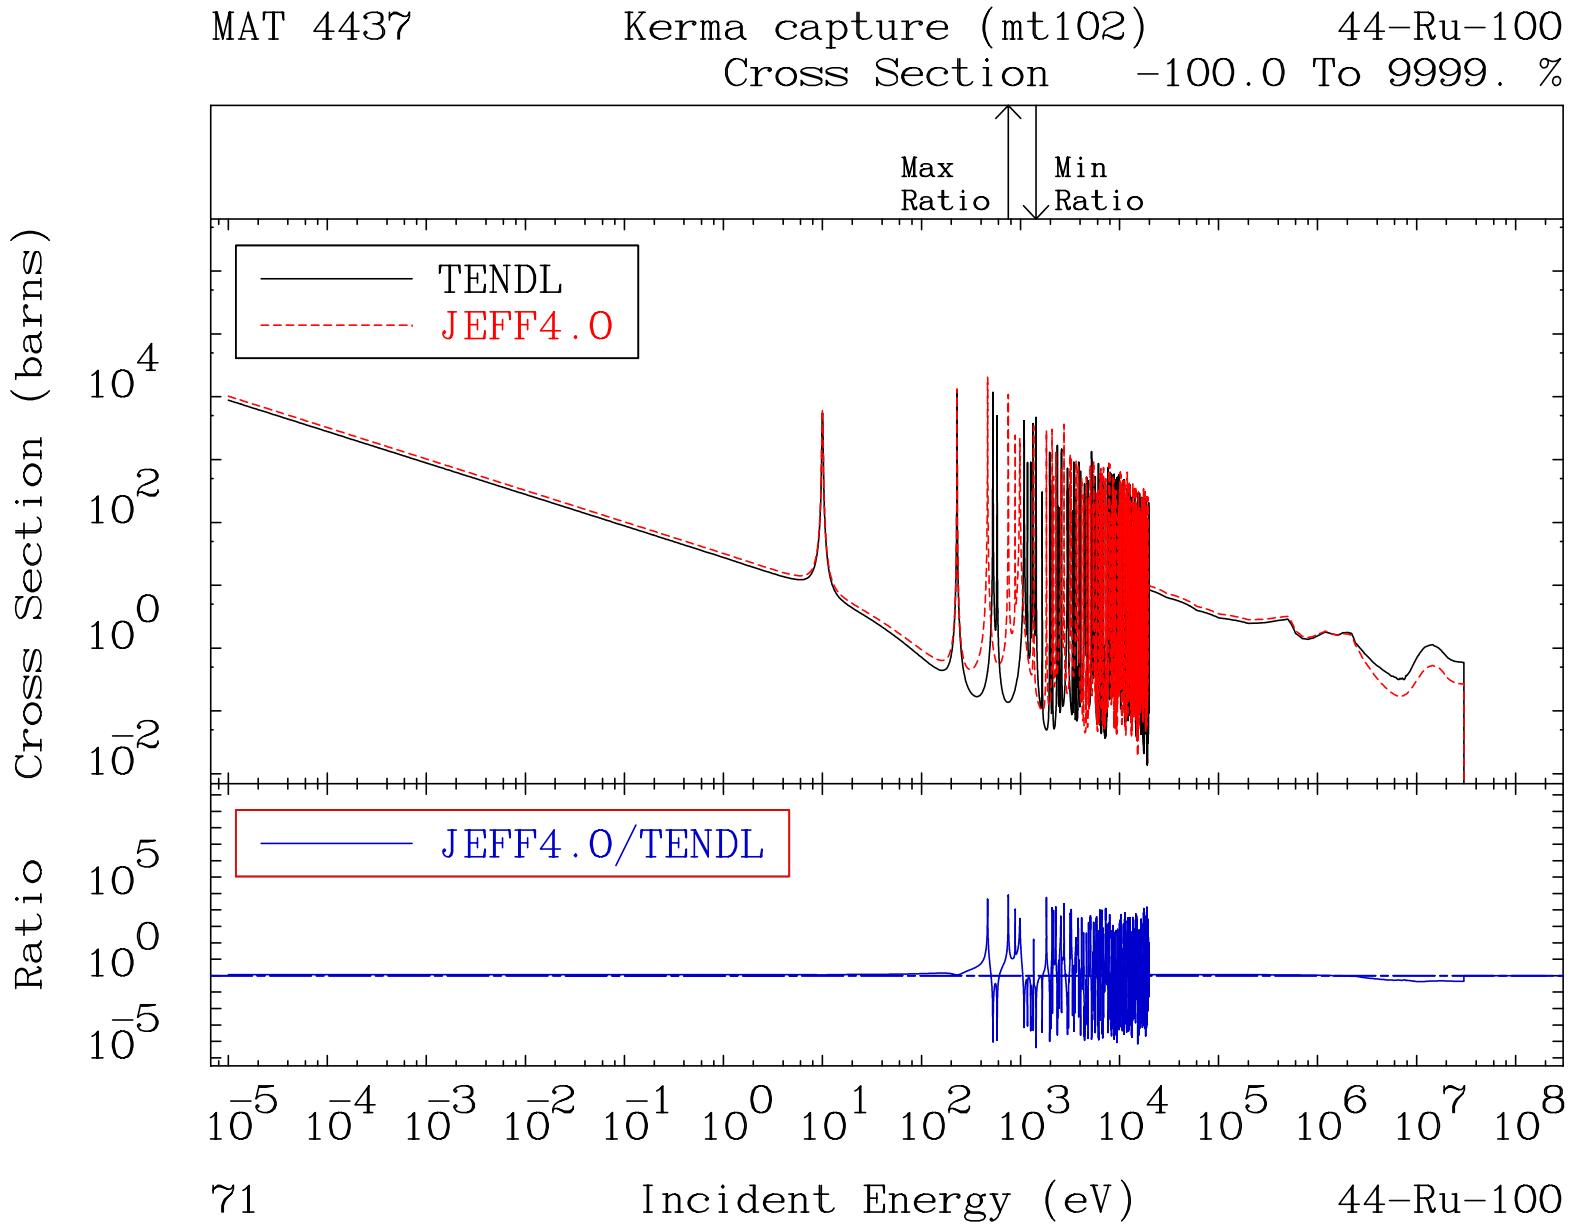
MAT 4437
Kerma capture (mt102)
44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JEFF4.0
Cross Section (barns)
JEFF4.0/TENDL
Ratio
Incident Energy (eV)
71
44-Ru-100

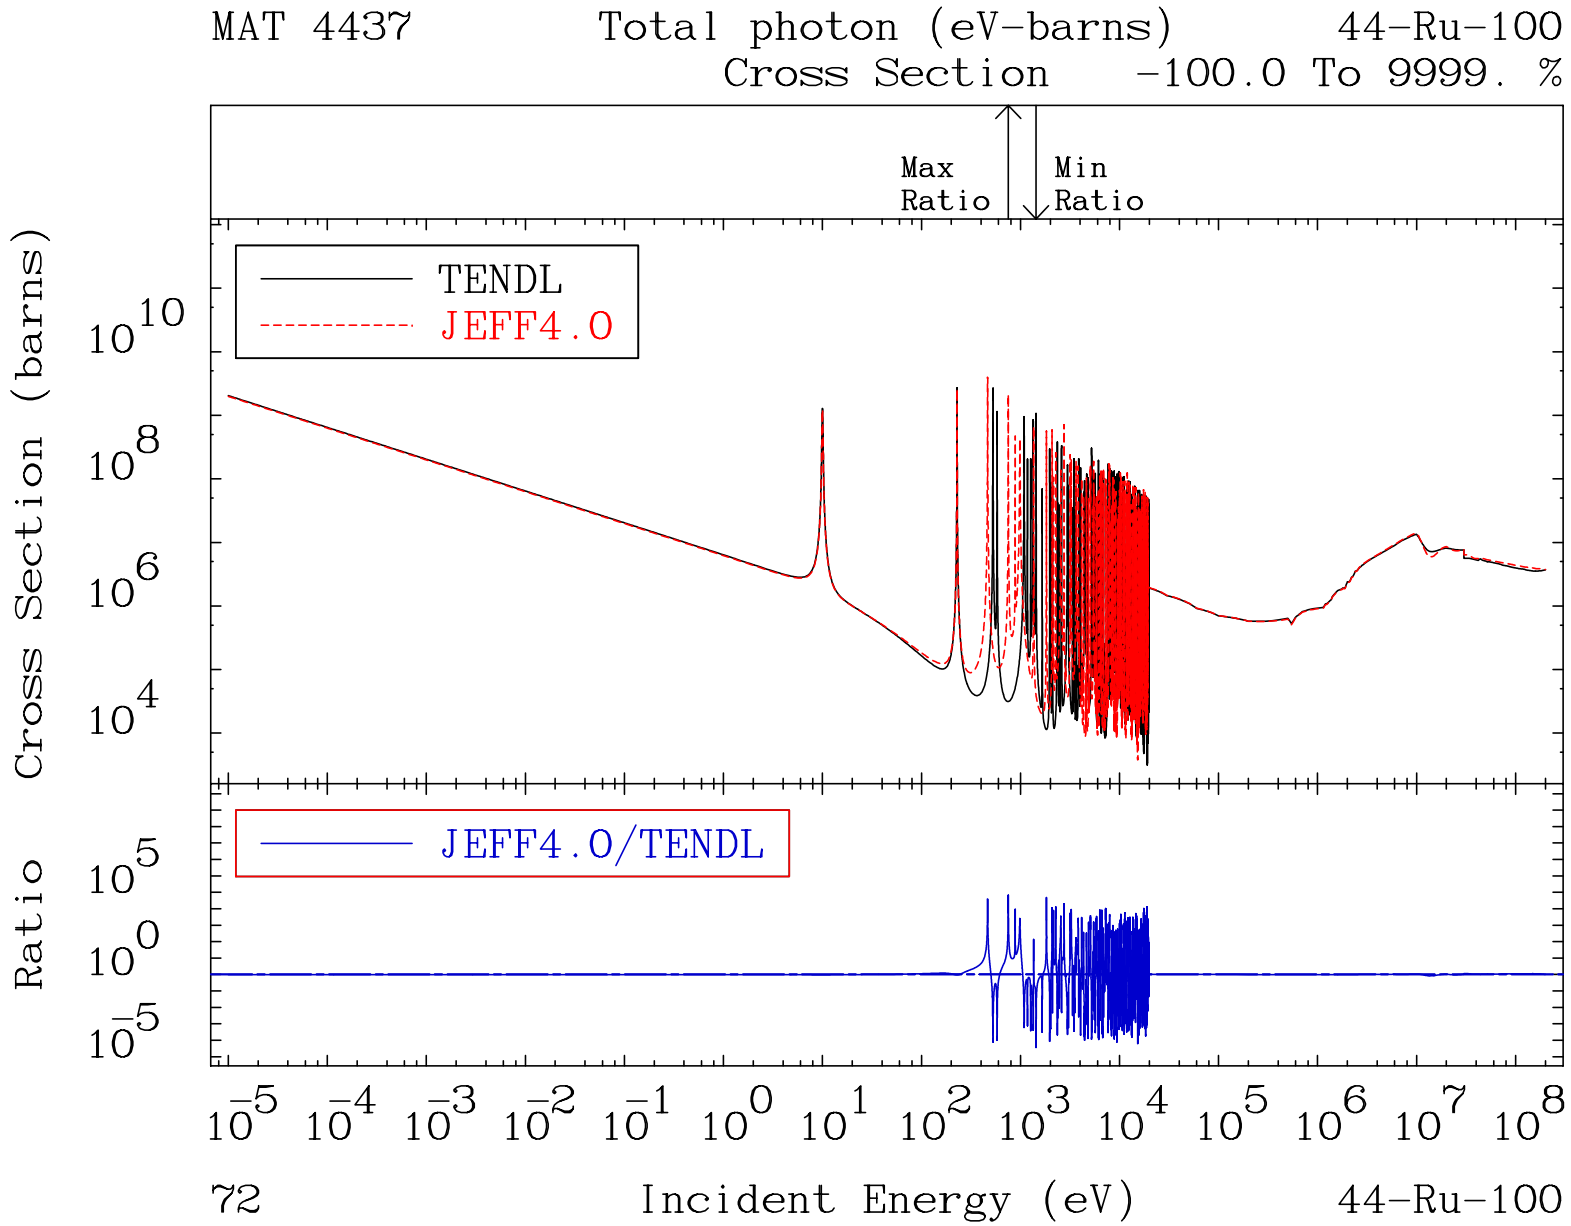
MAT 4437
Total photon (eV-barns)
44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JEFF4.0
JEFF4.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
72
44-Ru-100

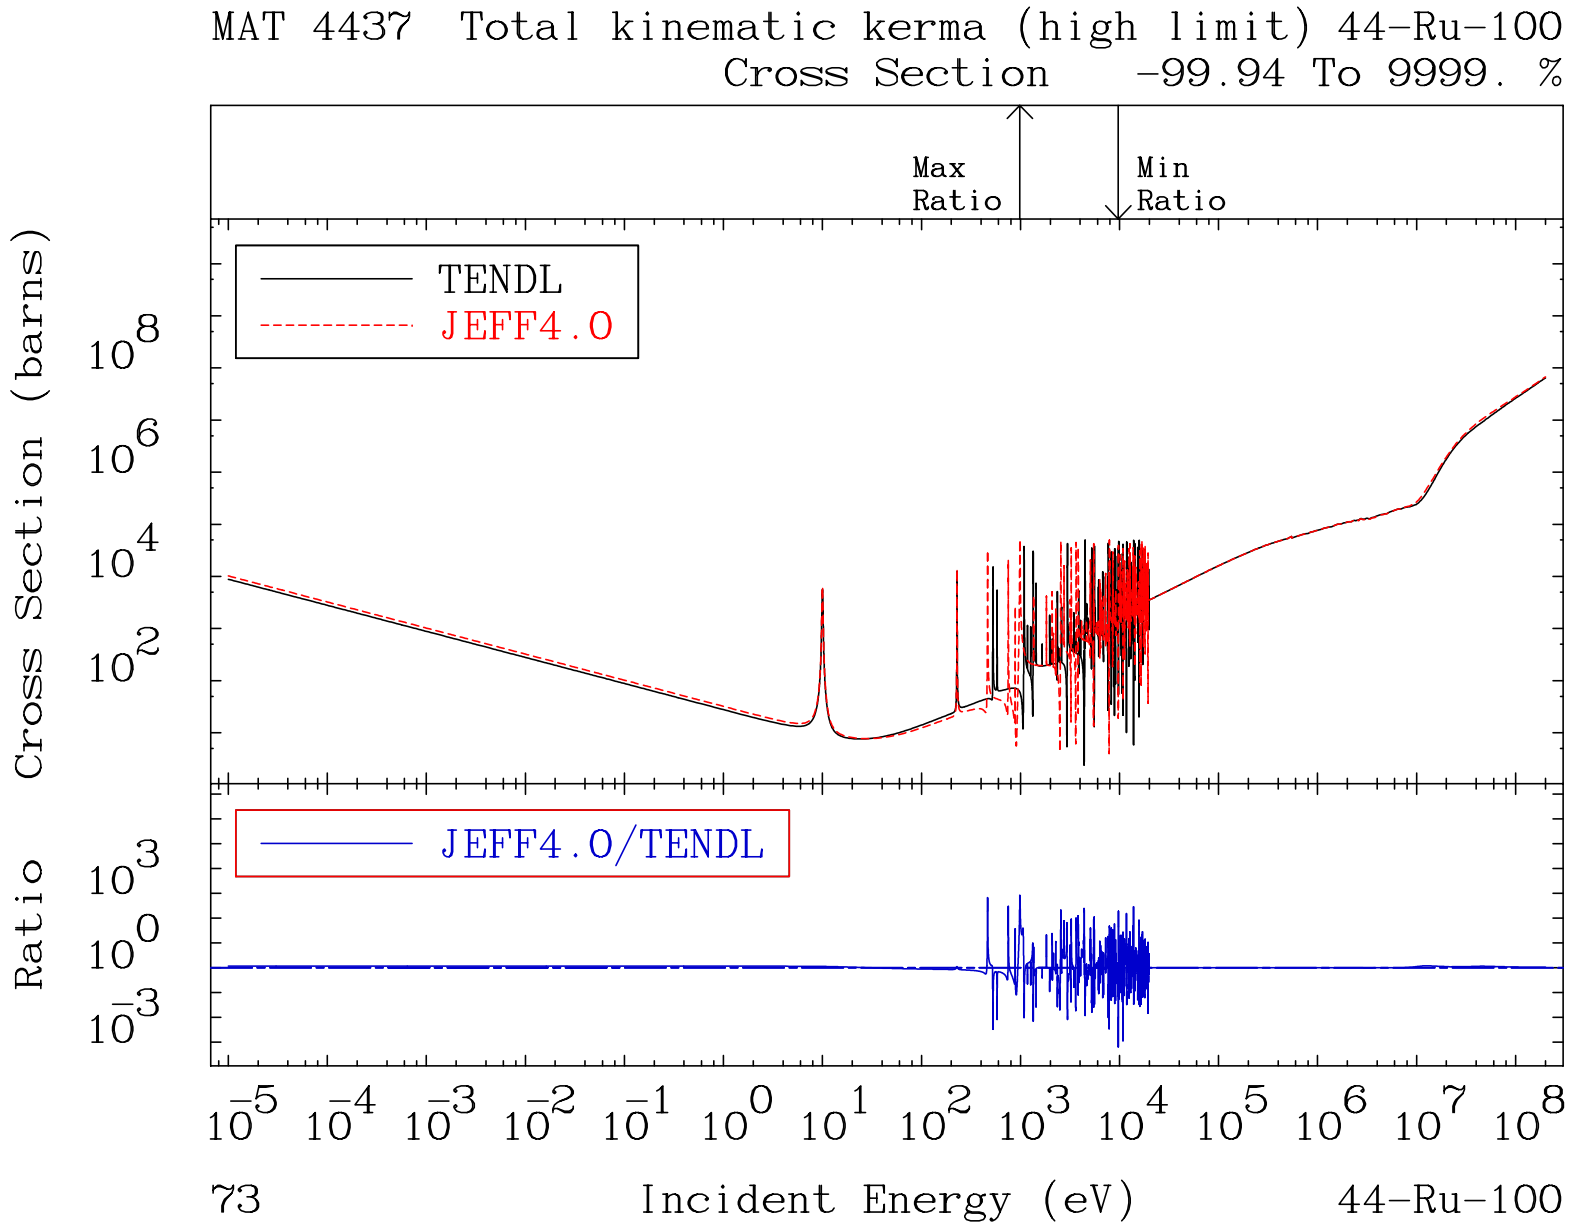
MAT 4437 Total kinematic kerma (high limit) 44-Ru-100
Cross Section -99.94 To 9999. %
Max Ratio
Min Ratio
TENDL
JEFF4.0
JEFF4.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
73
44-Ru-100

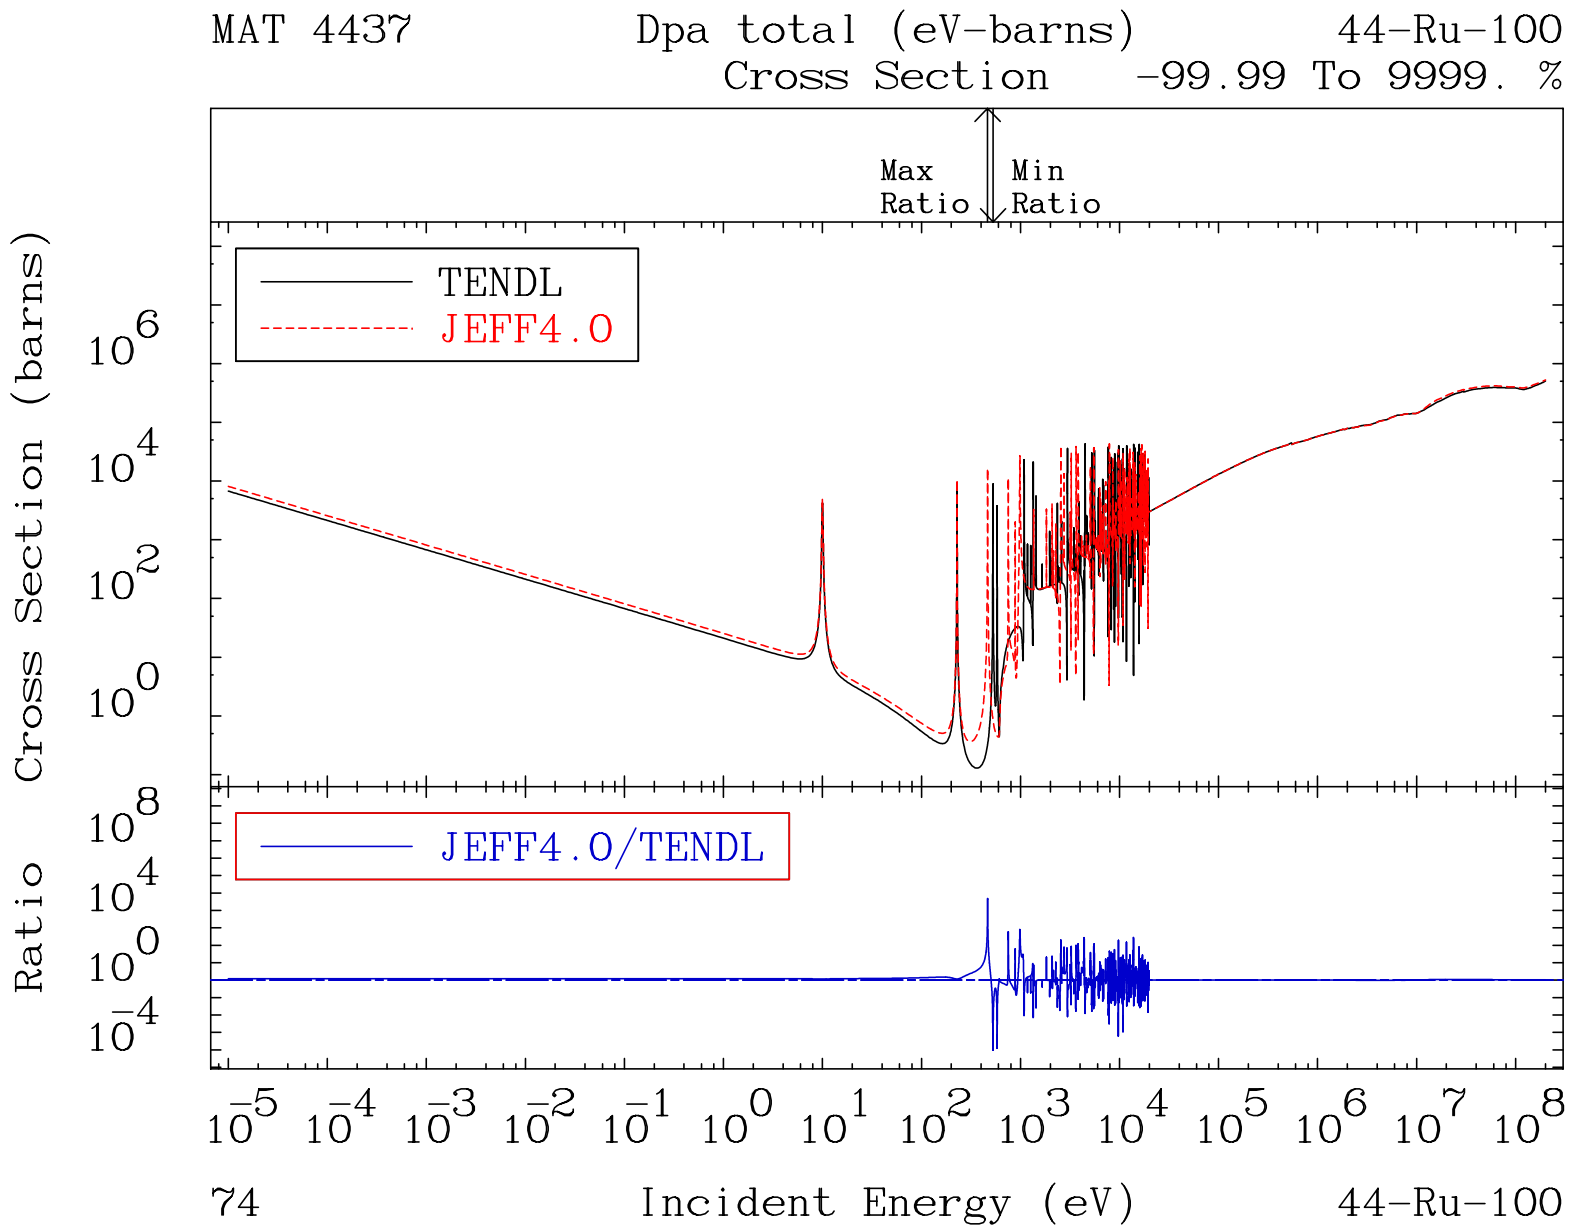
MAT 4437
Dpa total (eV-barns)
44-Ru-100
Cross Section
-99.99 To 9999. %
Max Ratio
Min Ratio
TENDL
JEFF4.0
JEFF4.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
74
44-Ru-100

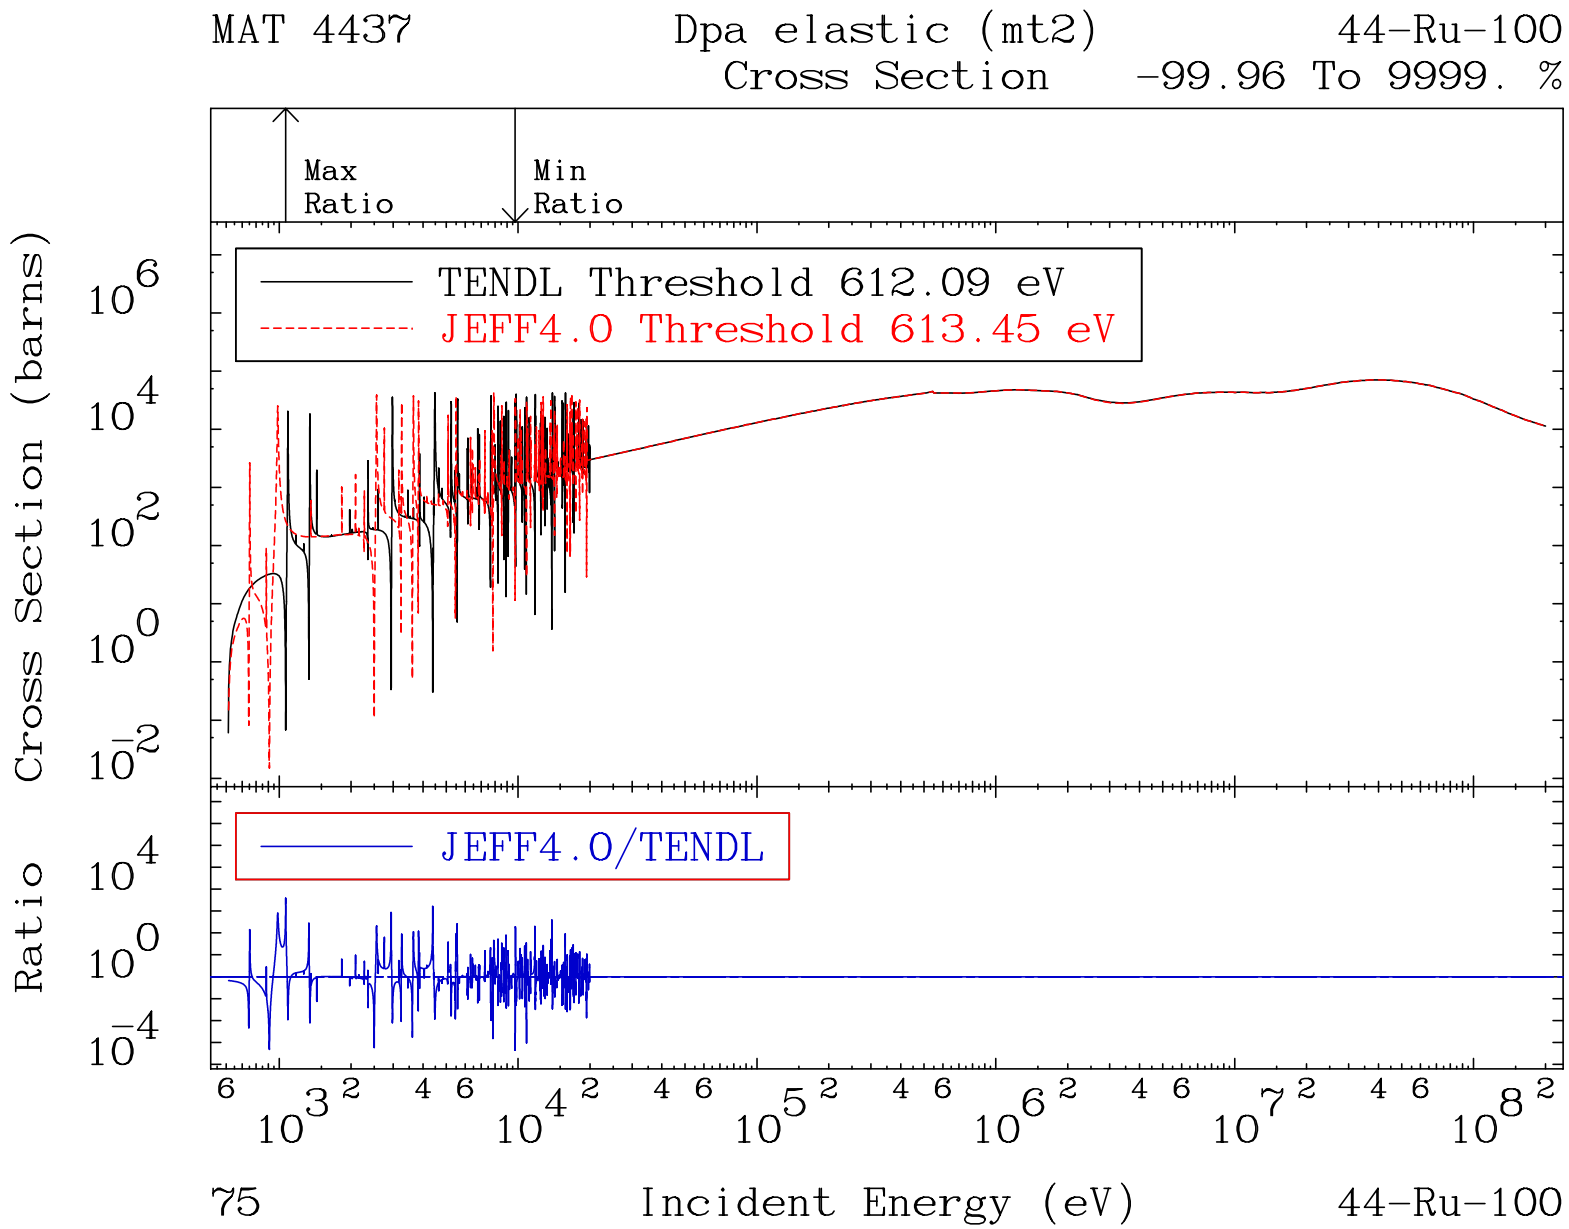
MAT 4437
Dpa elastic (mt2)
Cross Section
44-Ru-100
-99.96 To 9999. %
Max Ratio
Min Ratio
TENDL Threshold 612.09 eV
JEFF4.0 Threshold 613.45 eV
JEFF4.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
75
44-Ru-100

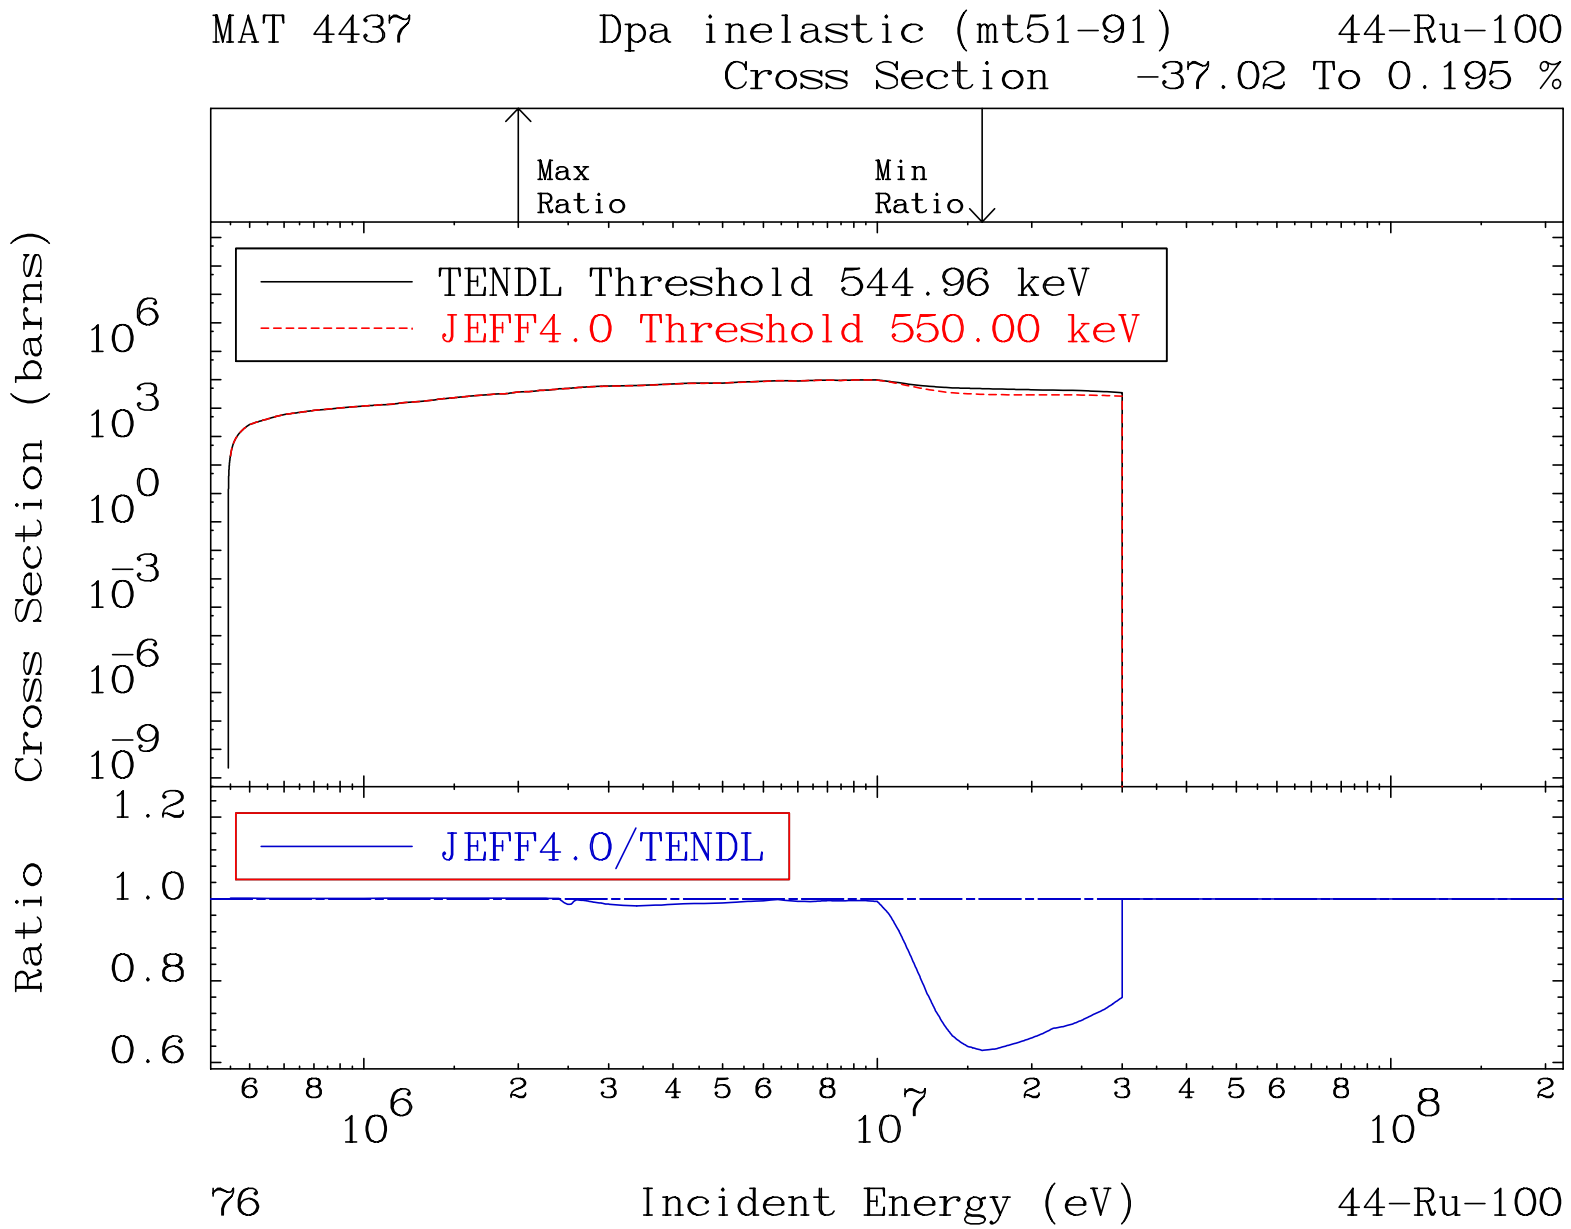
MAT 4437
Dpa inelastic (mt51-91)
44-Ru-100
Cross Section
-37.02 To 0.195 %
Max Ratio
Min Ratio
TENDL Threshold 544.96 keV
JEFF4.0 Threshold 550.00 keV
JEFF4.0/TENDL
Cross Section (barns)
Ratio
Incident Energy (eV)
76
44-Ru-100

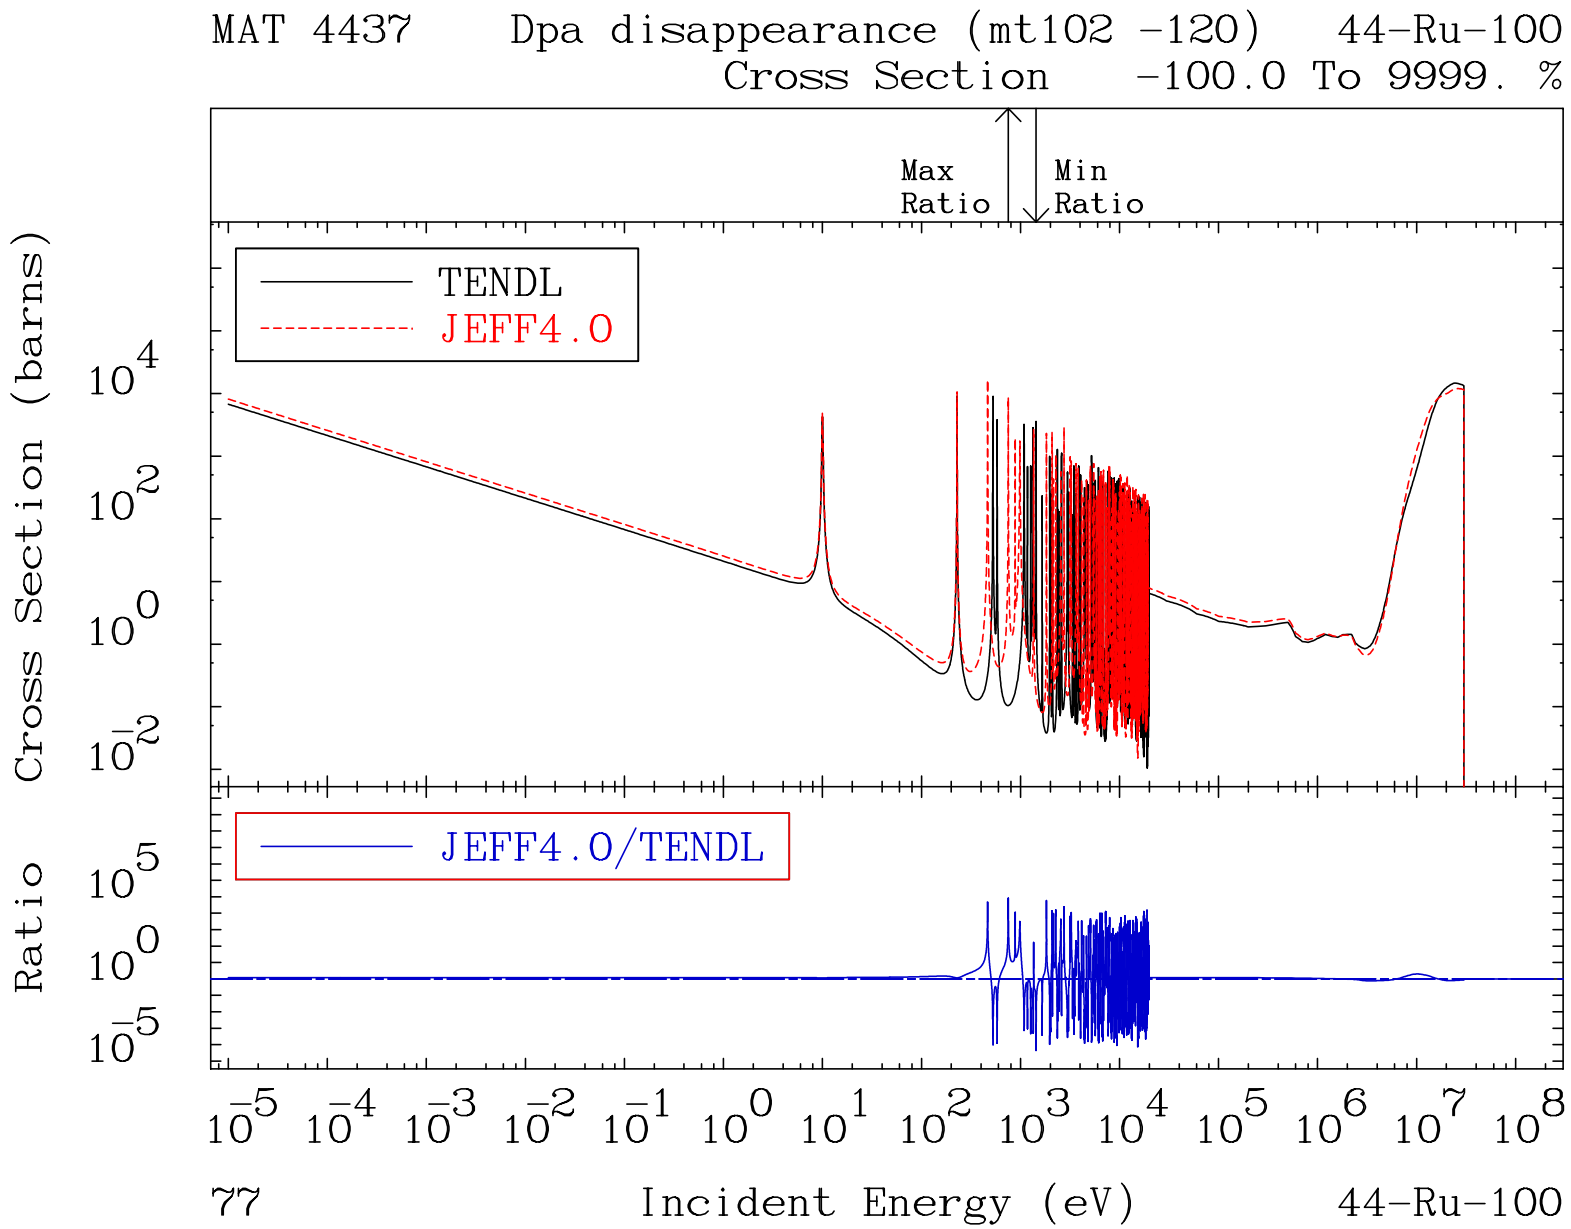
MAT 4437 Dpa disappearance (mt102 -120) 44-Ru-100
Cross Section -100.0 To 9999. %
Max Ratio
Min Ratio
TENDL
JEFF4.0
Cross Section (barns)
JEFF4.0/TENDL
Ratio
Incident Energy (eV)
77
44-Ru-100

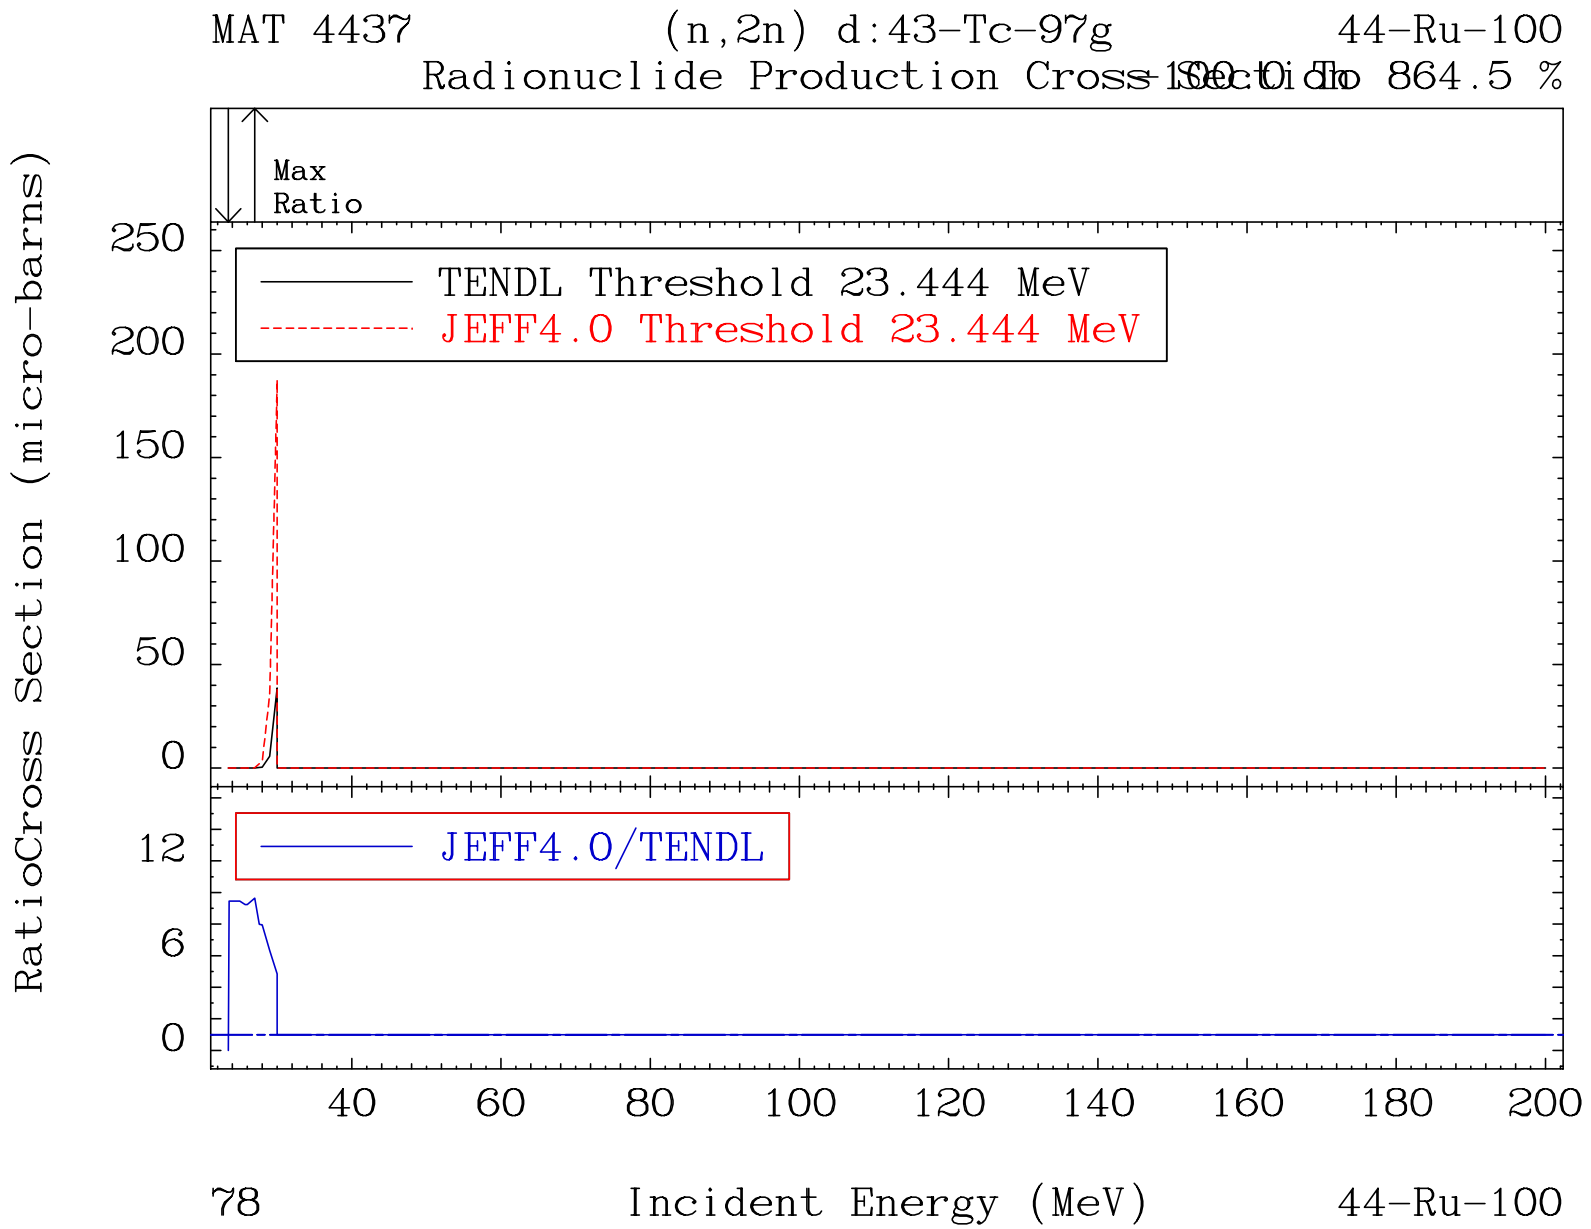
MAT 4437
(n,2n) d:43-Tc-97g
44-Ru-100
Radionuclide Production Cross Section To 864.5 %
Max
Ratio
TENDL Threshold 23.444 MeV
JEFF4.0 Threshold 23.444 MeV
JEFF4.0/TENDL
RatioCross Section (micro-barns)
250
200
150
100
50
0
12
6
0
40
60
80
100
120
140
160
180
200
78
Incident Energy (MeV)
44-Ru-100

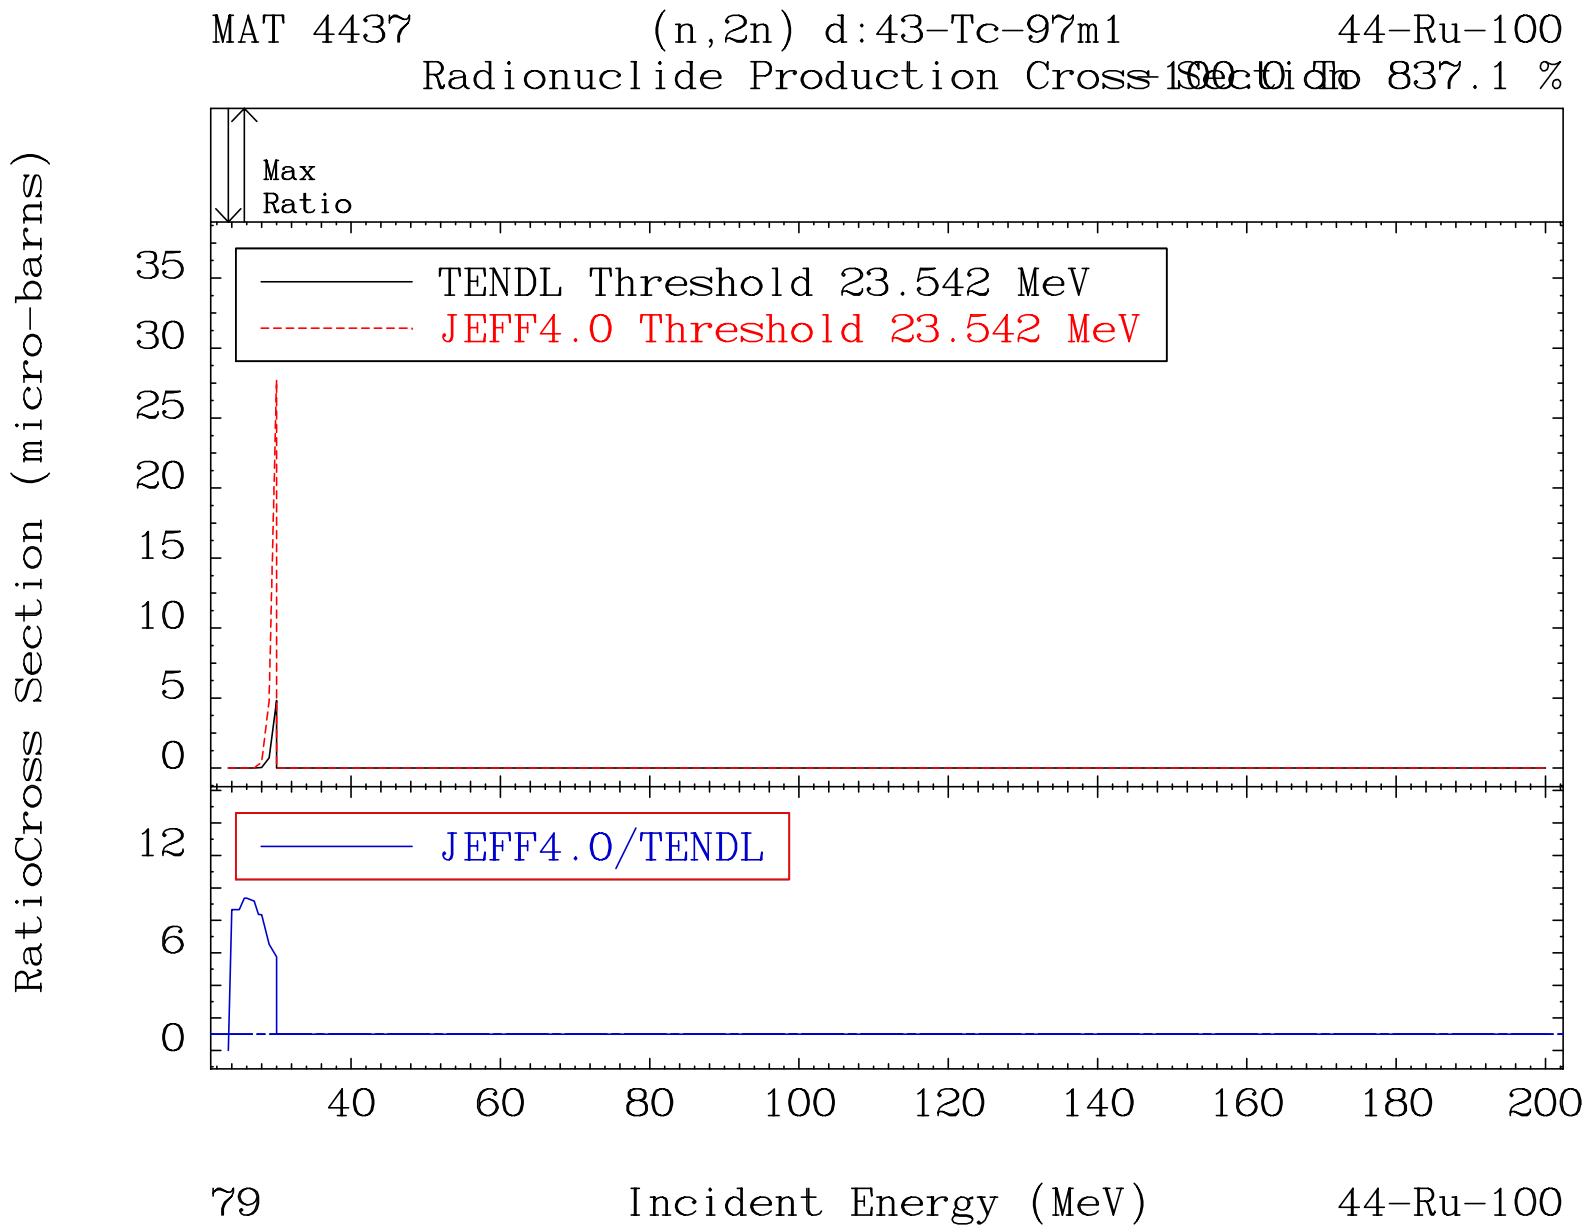
MAT 4437
(n,2n) d:43-Tc-97m1
44-Ru-100
Radionuclide Production Cross Section
Max Ratio
837.1 %
TENDL Threshold 23.542 MeV
JEFF4.0 Threshold 23.542 MeV
JEFF4.0/TENDL
RatioCross Section (micro-barns)
Incident Energy (MeV)
79
44-Ru-100

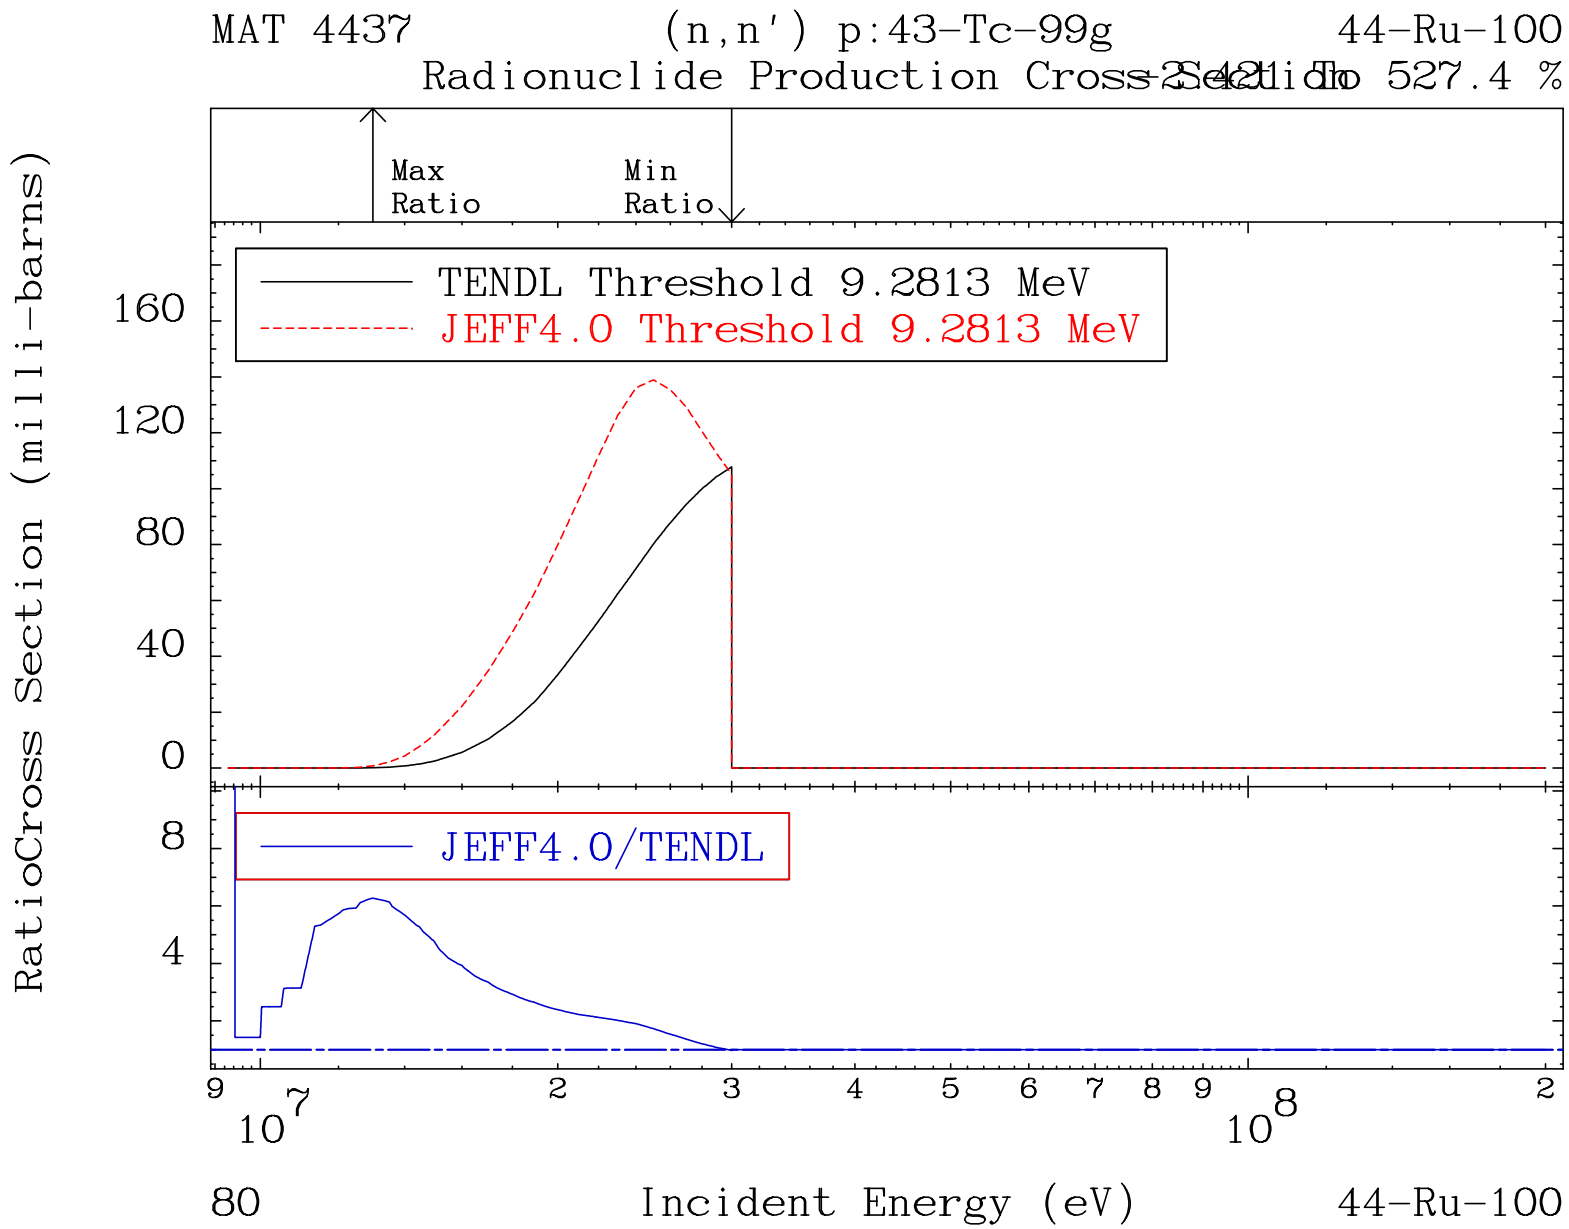
MAT 4437
(n,n') p:43-Tc-99g
44-Ru-100
Radionuclide Production Cross Section To 527.4 %
Max Ratio
Min Ratio
TENDL Threshold 9.2813 MeV
JEFF4.0 Threshold 9.2813 MeV
JEFF4.0/TENDL
RatioCross Section (milli-barns)
160
120
80
40
0
8
4
9
10^7
2
3
4
5
6
7
8
9
10^8
2
80
Incident Energy (eV)
44-Ru-100

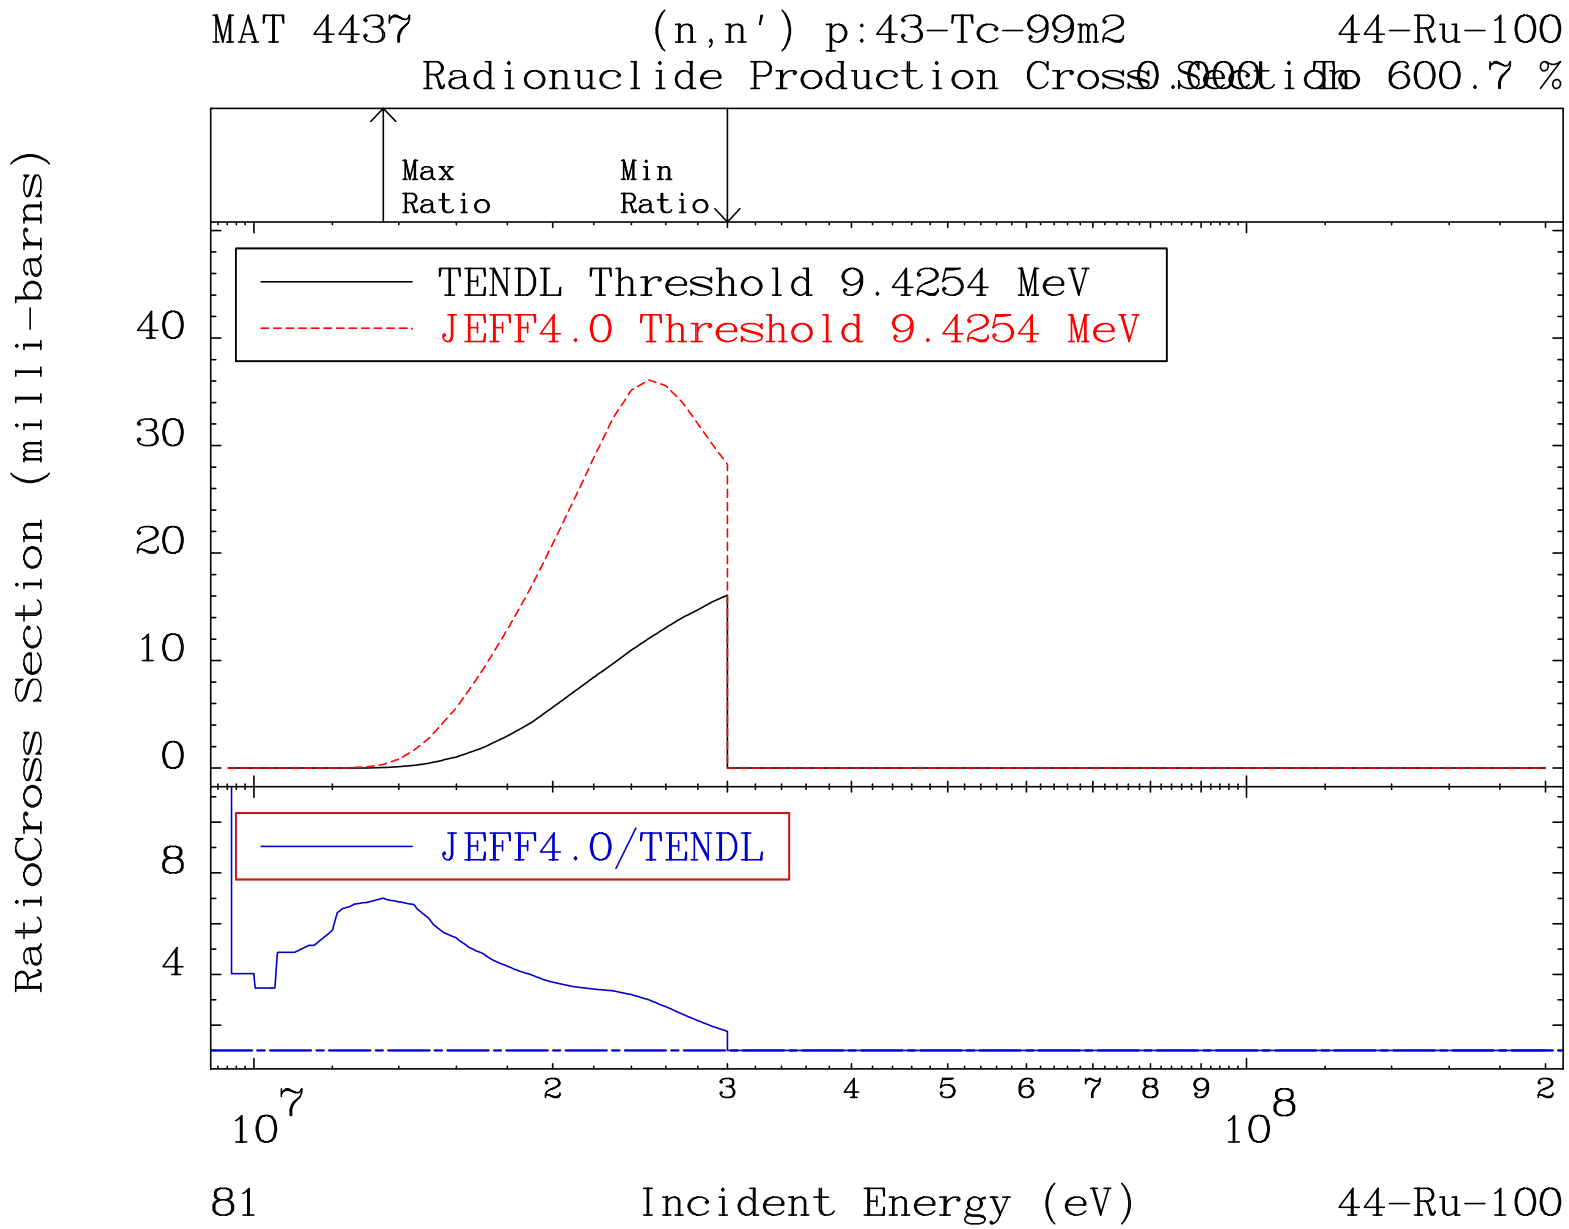
MAT 4437
(n,n') p:43-Tc-99m2
44-Ru-100
Radionuclide Production Cross Section
0.000 To 600.7 %
Max Ratio
Min Ratio
TENDL Threshold 9.4254 MeV
JEFF4.0 Threshold 9.4254 MeV
JEFF4.0/TENDL
RatioCross Section (milli-barns)
40
30
20
10
0
8
4
10^7
2
3
4
5
6
7
8
9
10^8
2
81
Incident Energy (eV)
44-Ru-100

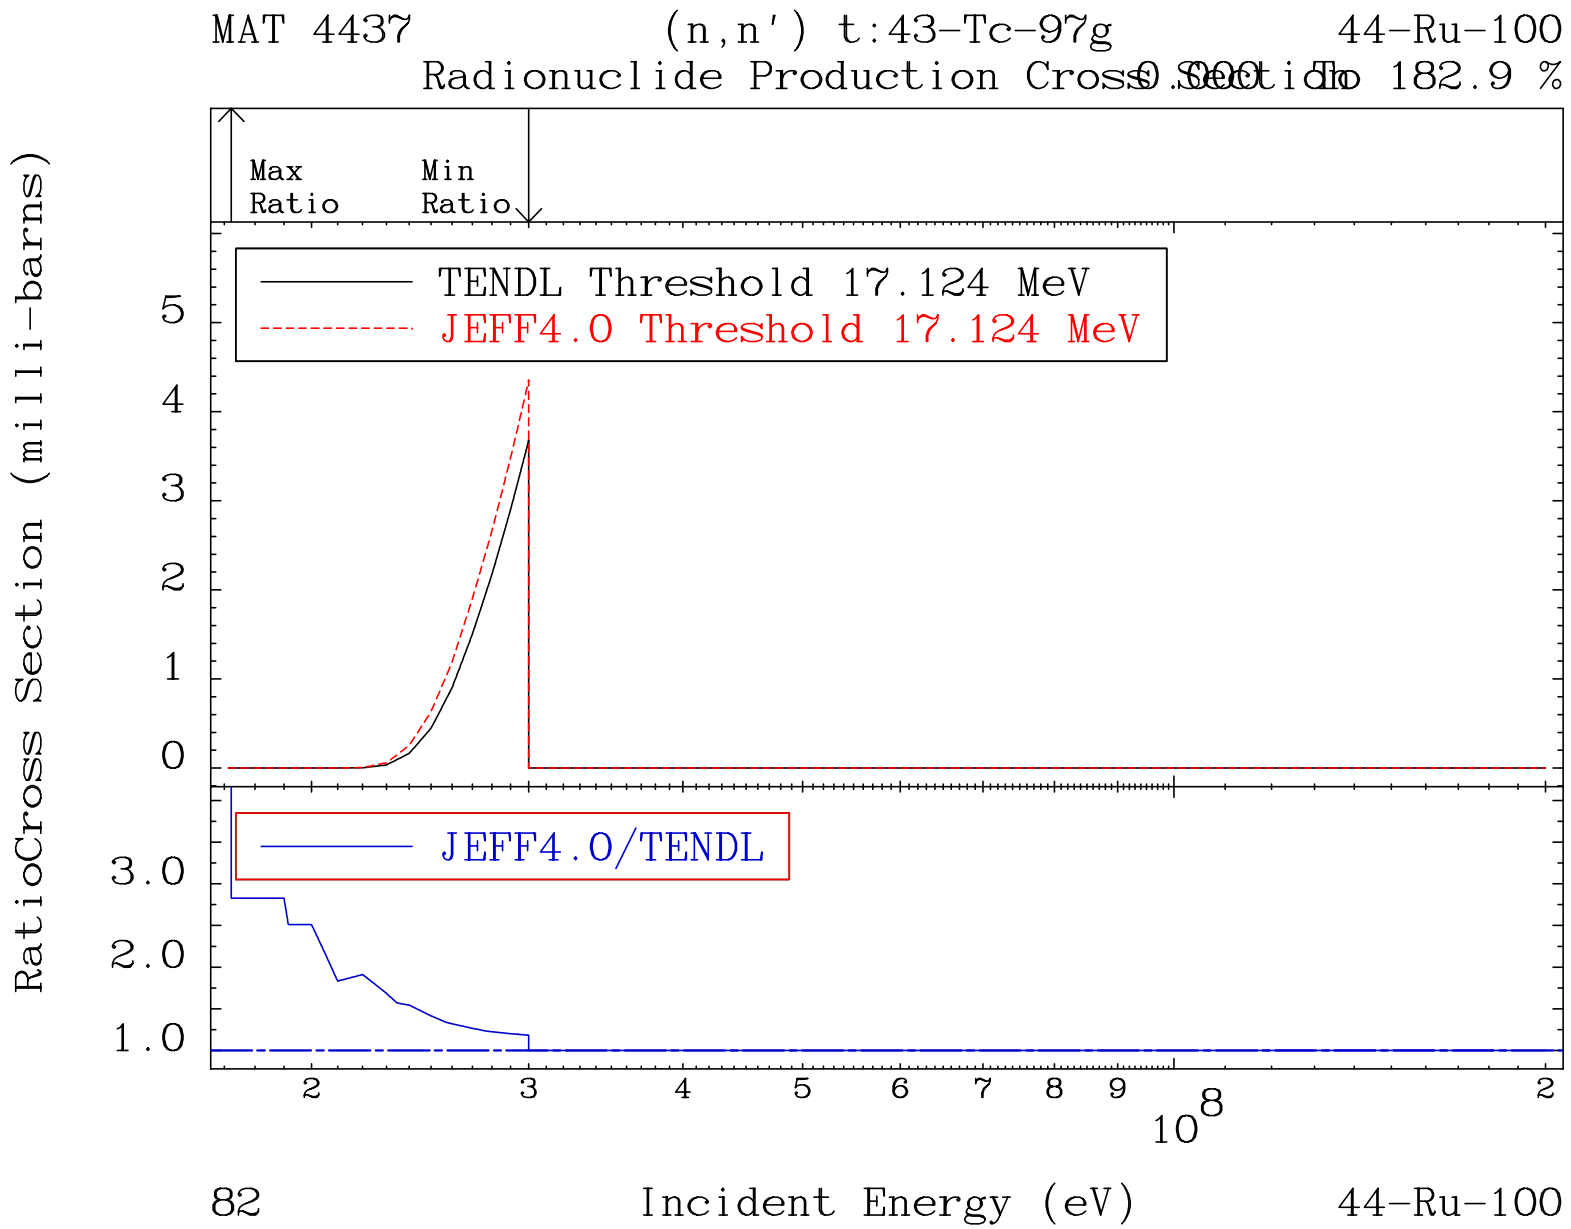
MAT 4437
(n,n') t:43-Tc-97g
44-Ru-100
Radionuclide Production Cross Section
0.000 To 182.9 %
Max Ratio
Min Ratio
TENDL Threshold 17.124 MeV
JEFF4.0 Threshold 17.124 MeV
JEFF4.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
82
44-Ru-100

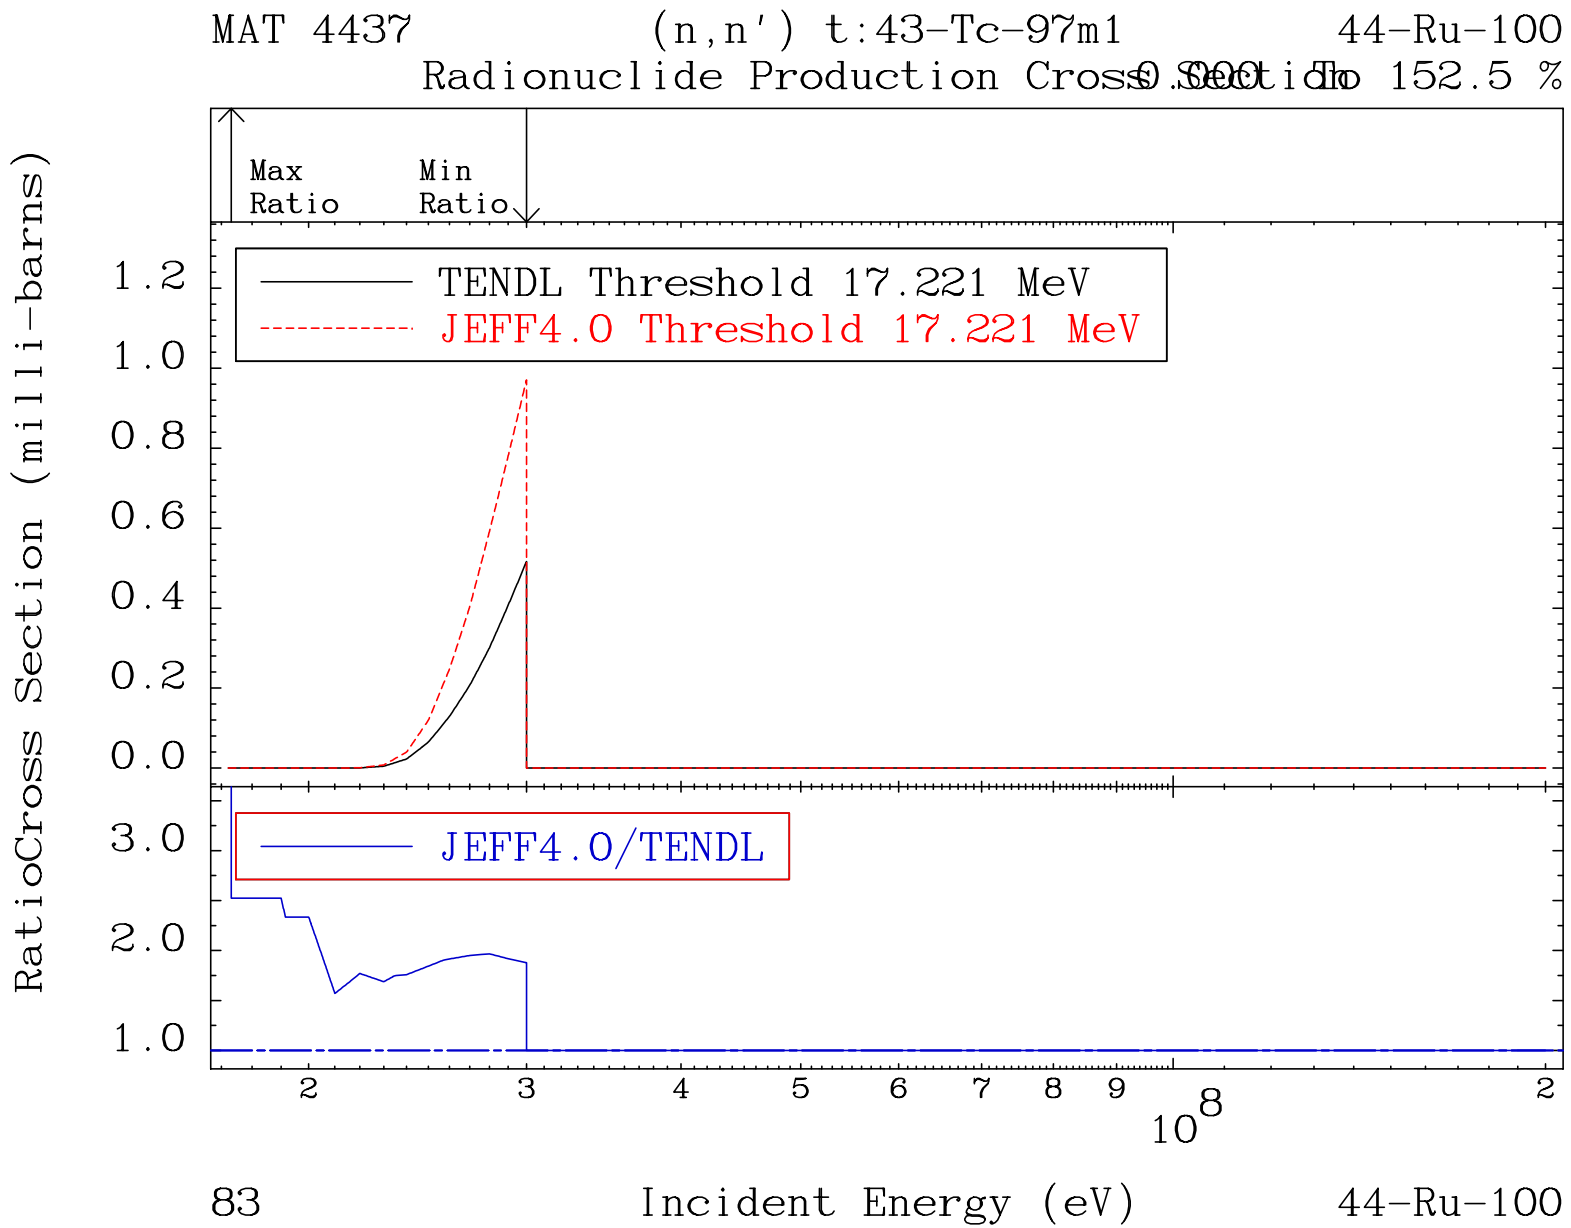
MAT 4437
(n,n') t:43-Tc-97m1
44-Ru-100
Radionuclide Production Cross Section
0.000 To 152.5 %
Max Ratio
Min Ratio
TENDL Threshold 17.221 MeV
JEFF4.0 Threshold 17.221 MeV
JEFF4.0/TENDL
RatioCross Section (milli-barns)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
3.0
2.0
1.0
2
3
4
5
6
7
8
9
10^8
2
83
Incident Energy (eV)
44-Ru-100

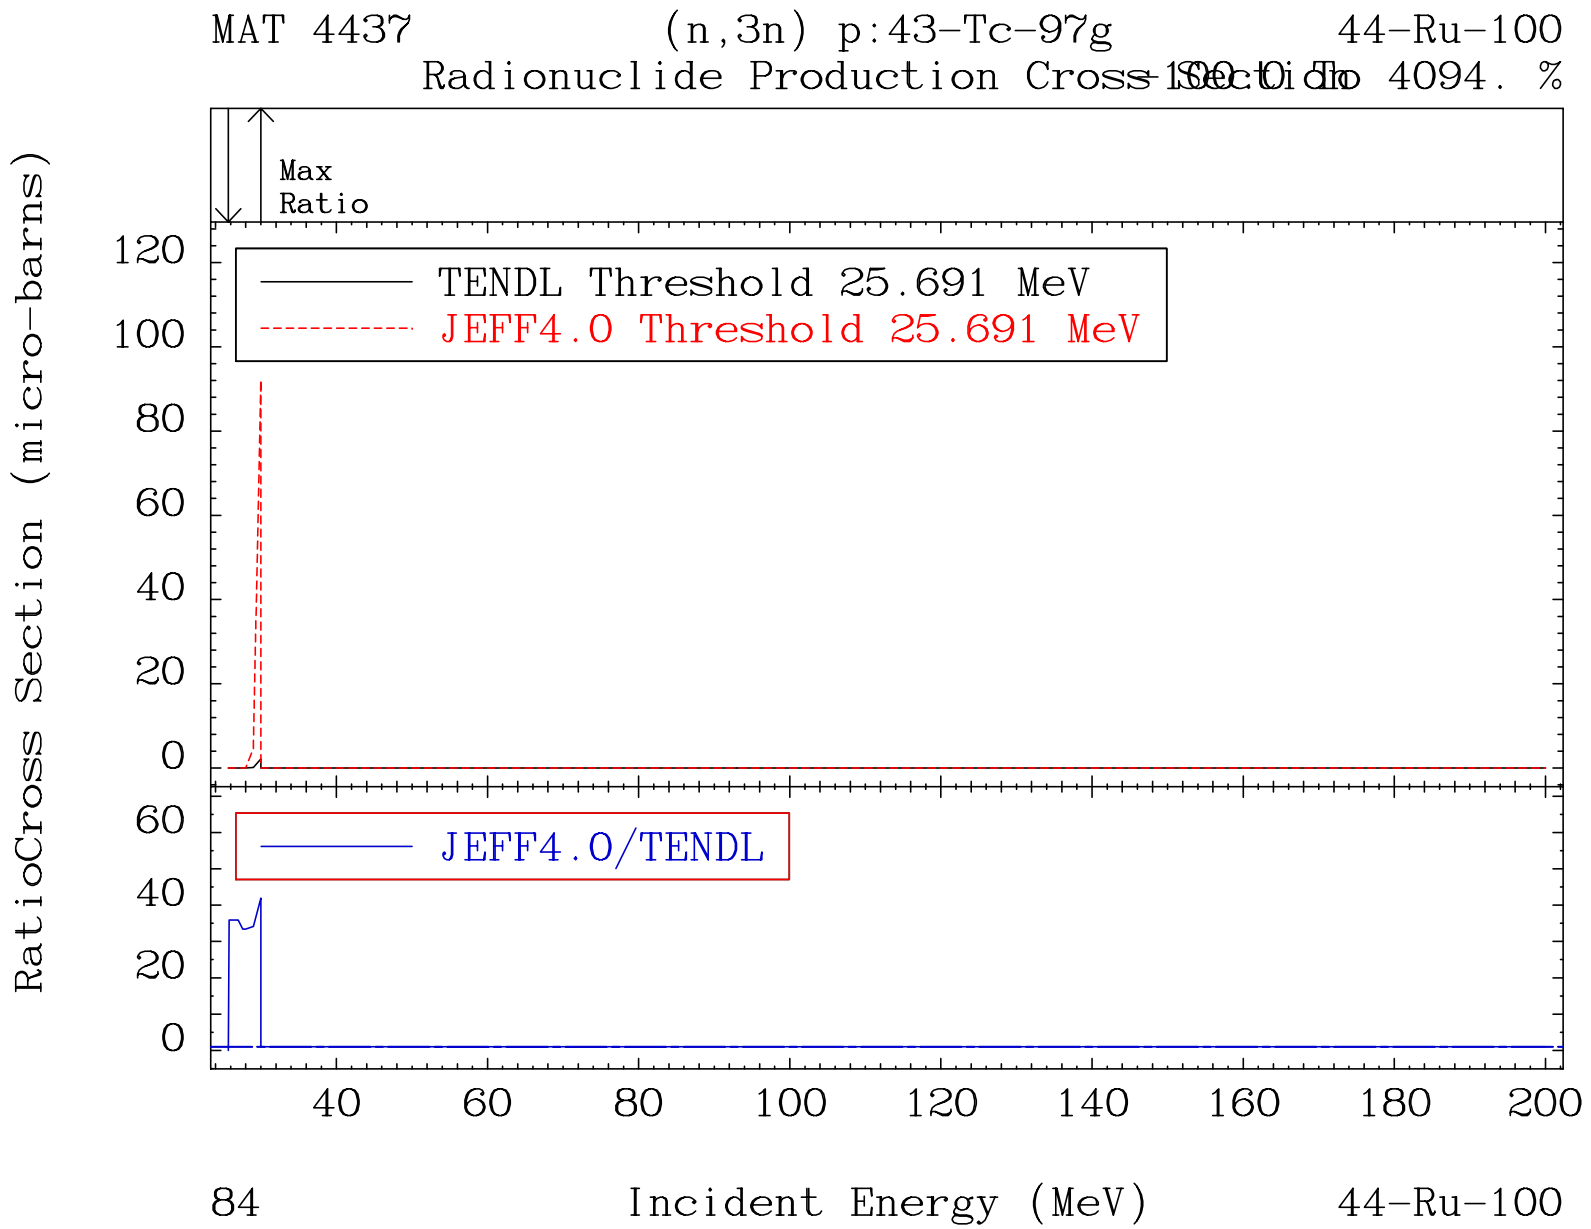
MAT 4437
(n,3n) p:43-Tc-97g
44-Ru-100
Radionuclide Production Cross Section To 4094. %
Max
Ratio
120
100
80
60
40
20
0
TENDL Threshold 25.691 MeV
JEFF4.0 Threshold 25.691 MeV
60
40
20
0
JEFF4.0/TENDL
RatioCross Section (micro-barns)
40
60
80
100
120
140
160
180
200
84
Incident Energy (MeV)
44-Ru-100

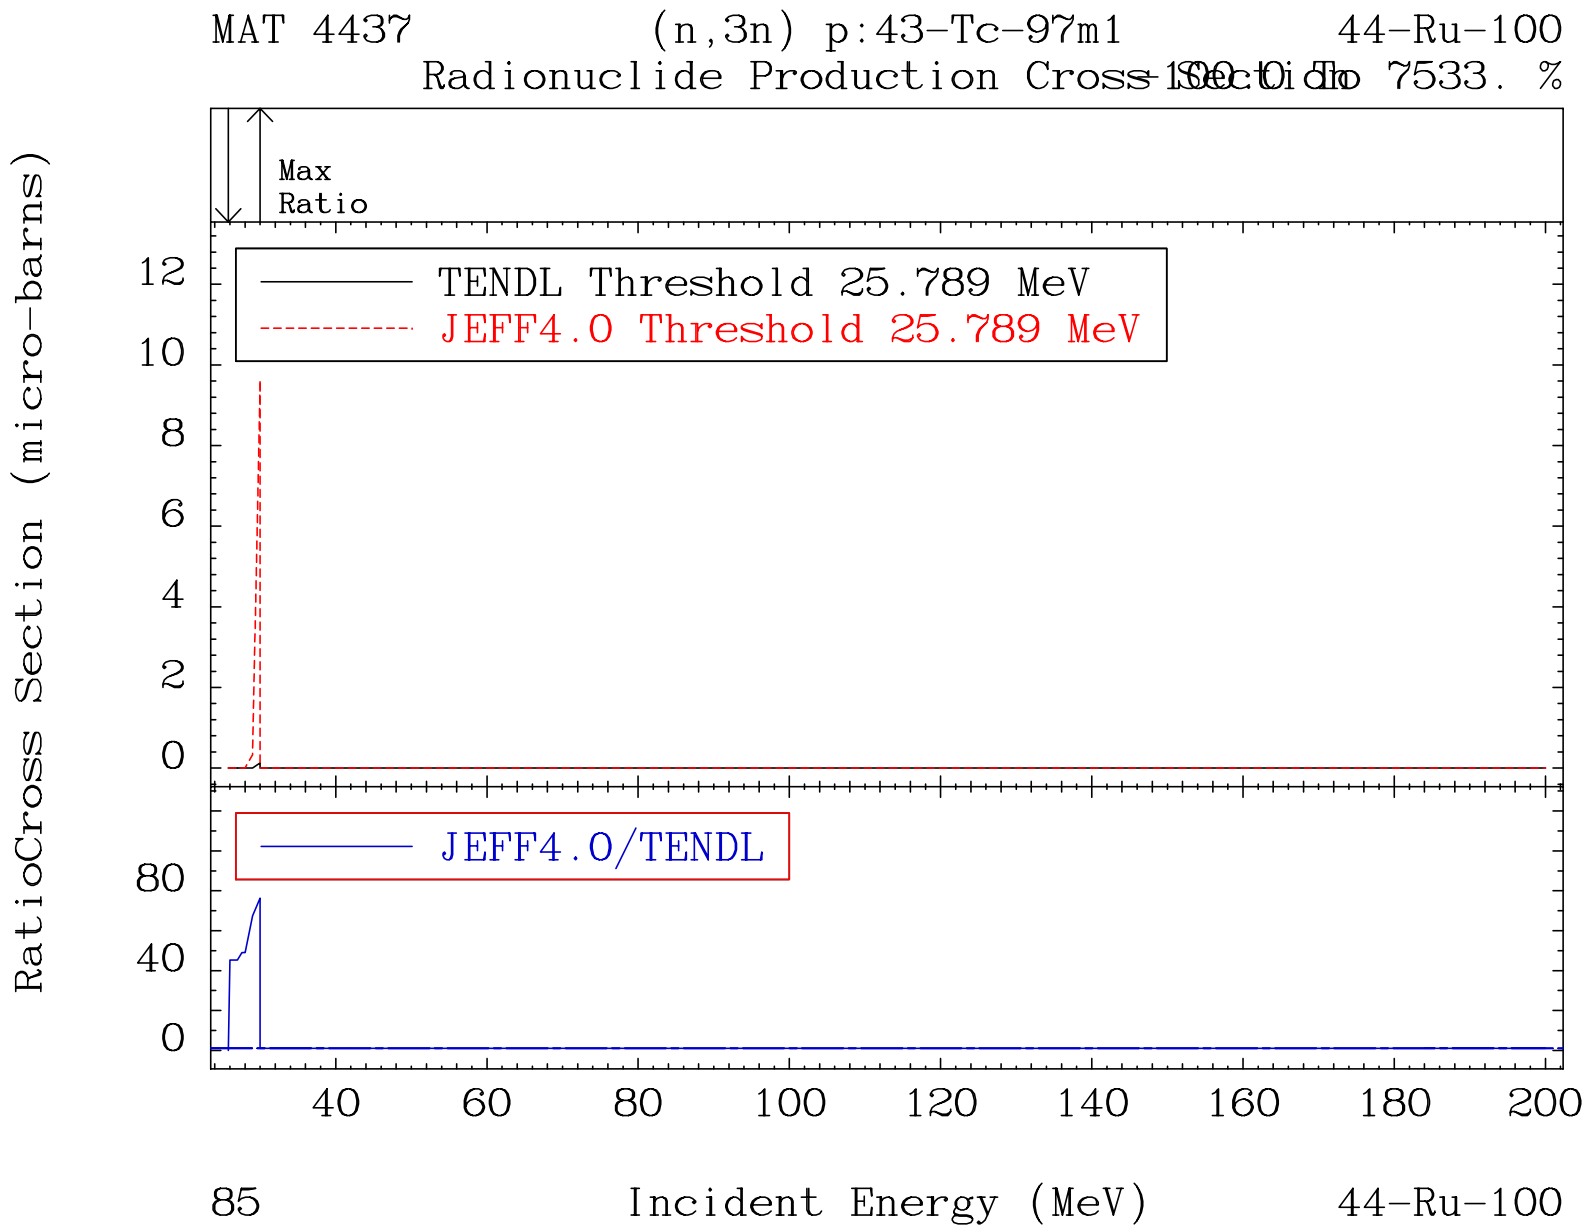
MAT 4437
(n,3n) p:43-Tc-97m1
44-Ru-100
Radionuclide Production Cross Section
Max
Ratio
TENDL Threshold 25.789 MeV
JEFF4.0 Threshold 25.789 MeV
JEFF4.0/TENDL
RatioCross Section (micro-barns)
Incident Energy (MeV)
85
44-Ru-100

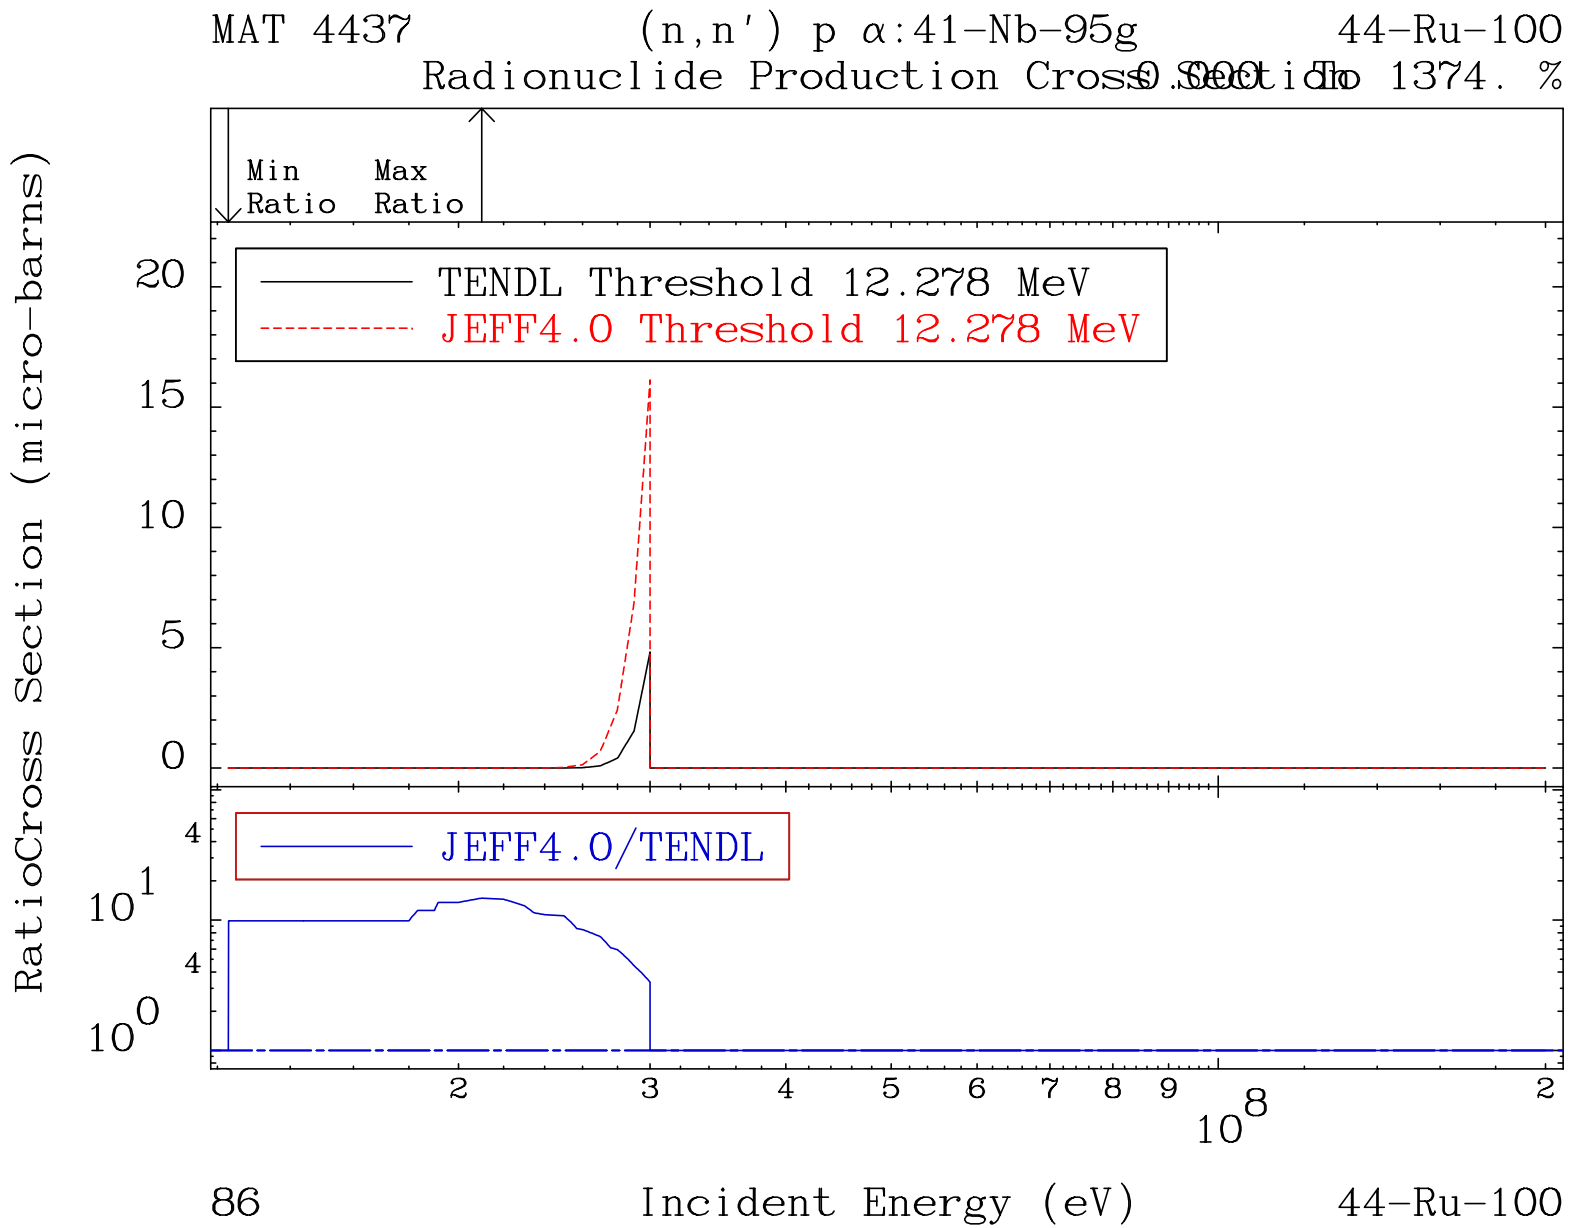
MAT 4437
(n,n') p α:41-Nb-95g
44-Ru-100
Radionuclide Production Cross Section
0.000 To 1374. %
Min Ratio
Max Ratio
TENDL Threshold 12.278 MeV
JEFF4.0 Threshold 12.278 MeV
JEFF4.0/TENDL
RatioCross Section (micro-barns)
Incident Energy (eV)
86
44-Ru-100

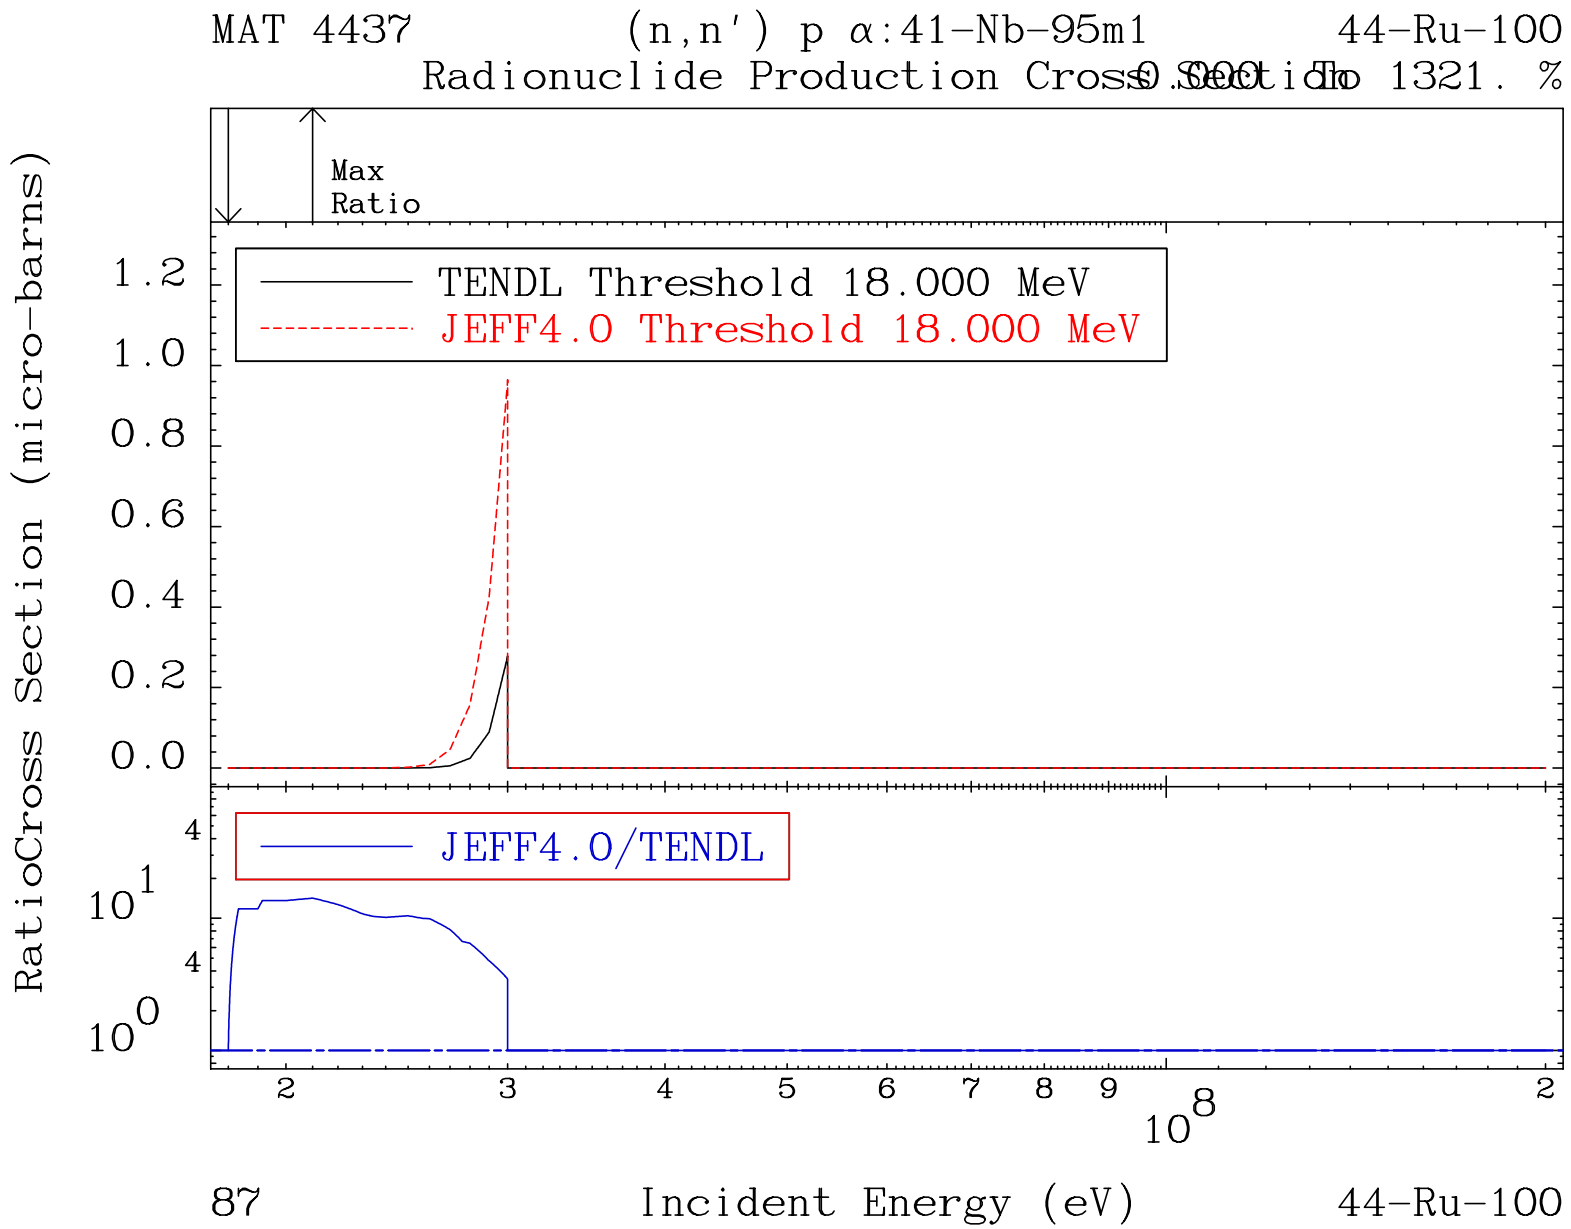
MAT 4437
(n,n') p α:41-Nb-95m1
44-Ru-100
Radionuclide Production Cross Section
0.000 To 1321. %
Max
Ratio
TENDL Threshold 18.000 MeV
JEFF4.0 Threshold 18.000 MeV
JEFF4.0/TENDL
RatioCross Section (micro-barns)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
4
10^1
4
10^0
2
3
4
5
6
7
8
9
10^8
2
87
Incident Energy (eV)
44-Ru-100

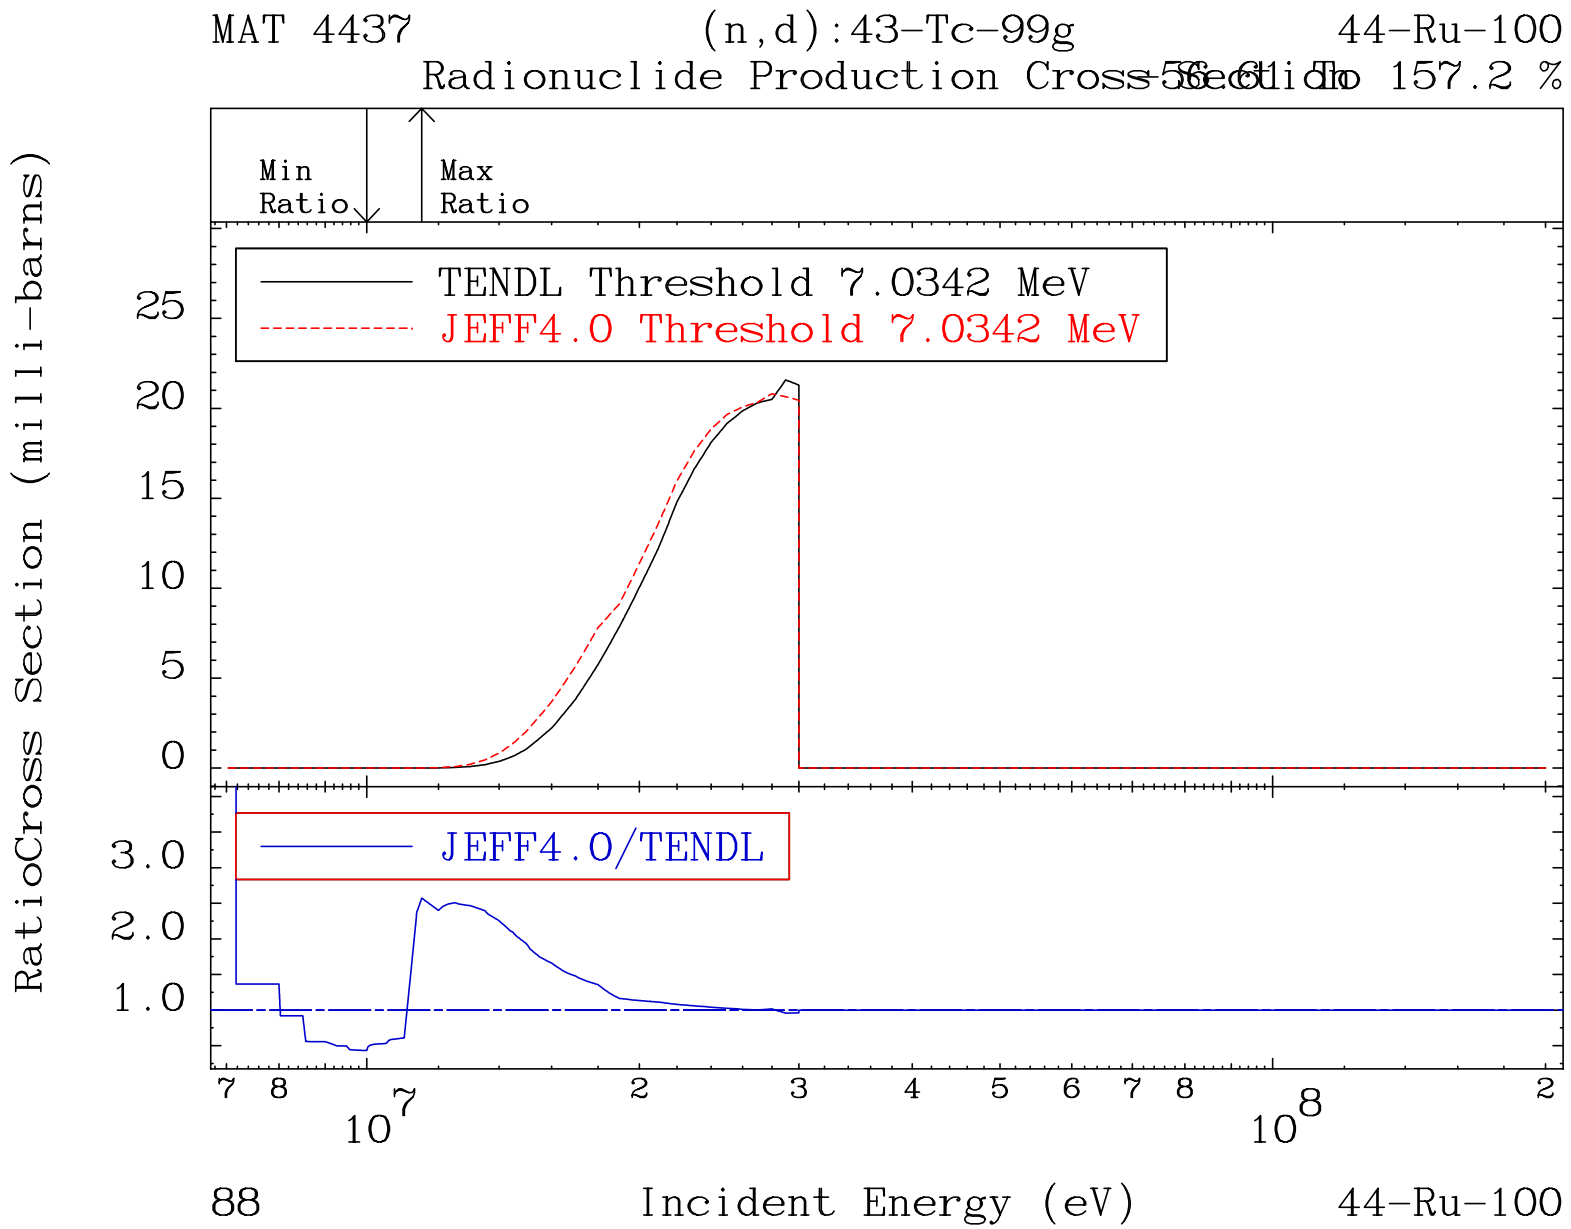
MAT 4437
(n,d):43-Tc-99g
44-Ru-100
Radionuclide Production Cross Section To 157.2 %
Min Ratio
Max Ratio
TENDL Threshold 7.0342 MeV
JEFF4.0 Threshold 7.0342 MeV
JEFF4.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
88
44-Ru-100

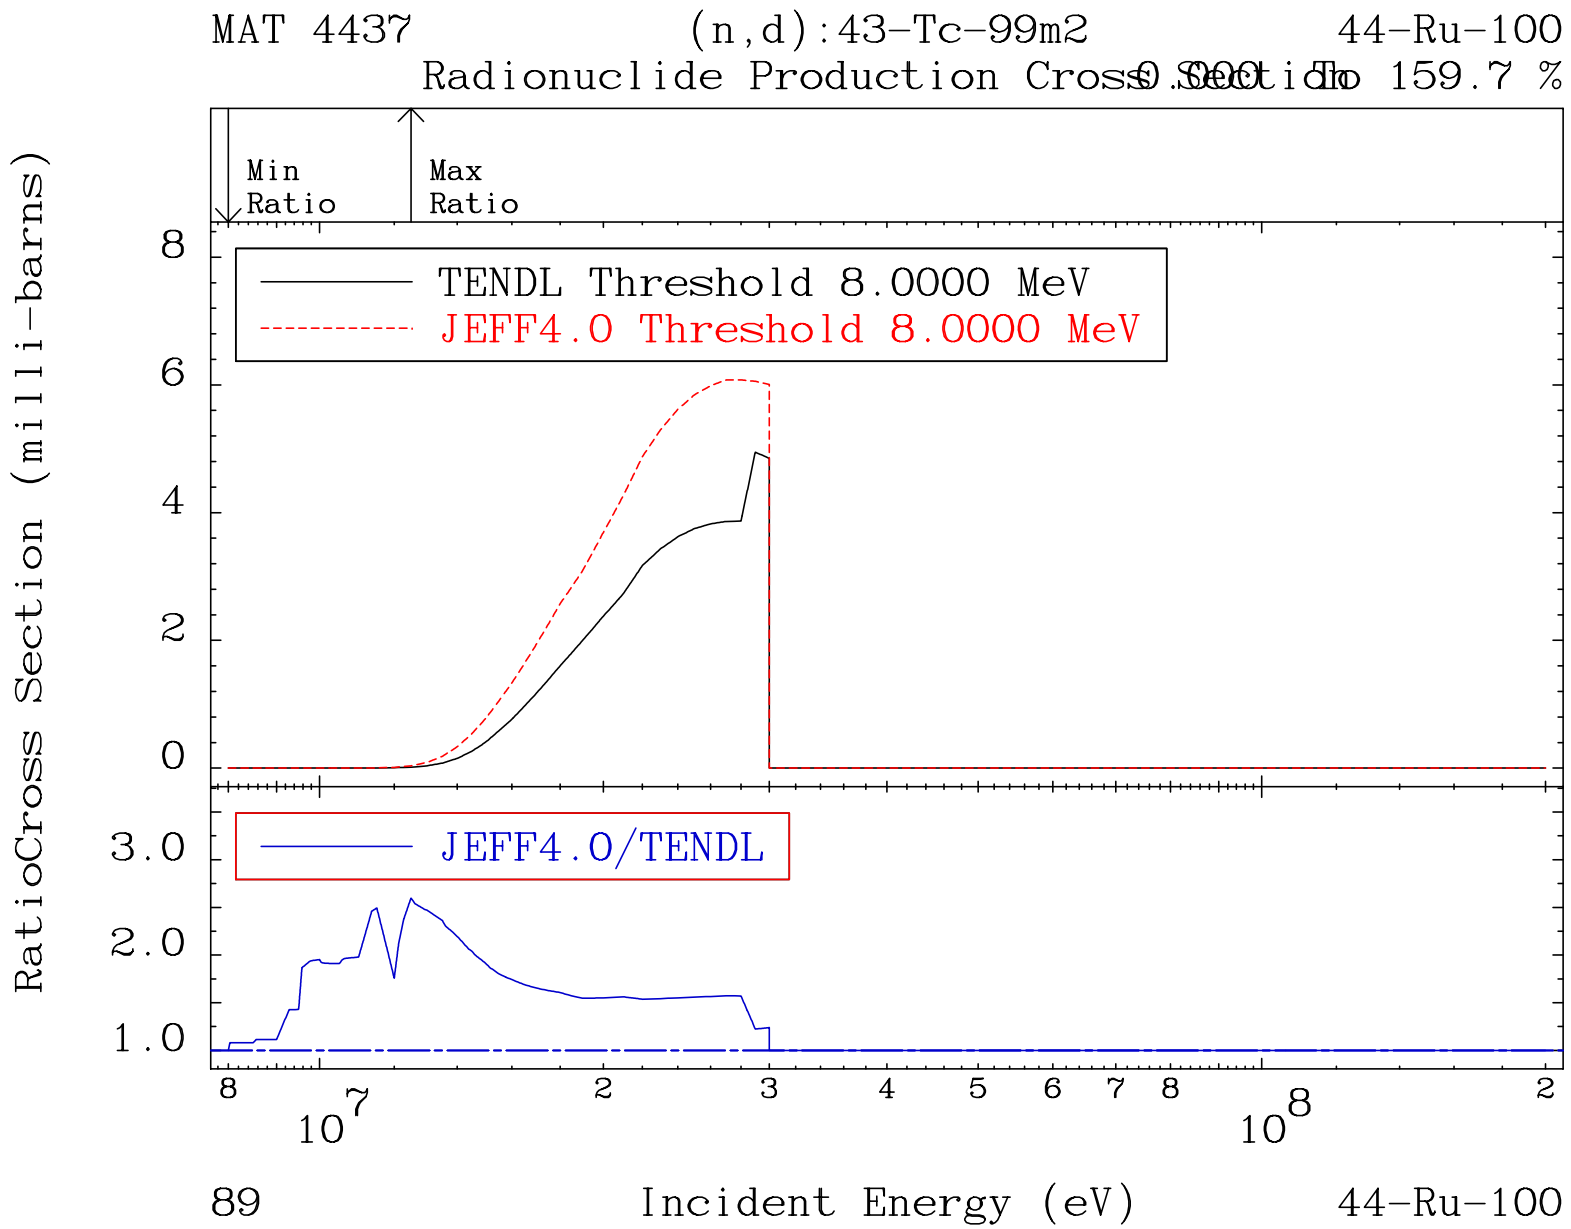
MAT 4437
(n,d):43-Tc-99m2
44-Ru-100
Radionuclide Production Cross Section
0.000 To 159.7 %
Min Ratio
Max Ratio
TENDL Threshold 8.0000 MeV
JEFF4.0 Threshold 8.0000 MeV
JEFF4.0/TENDL
RatioCross Section (milli-barns)
Incident Energy (eV)
89
44-Ru-100

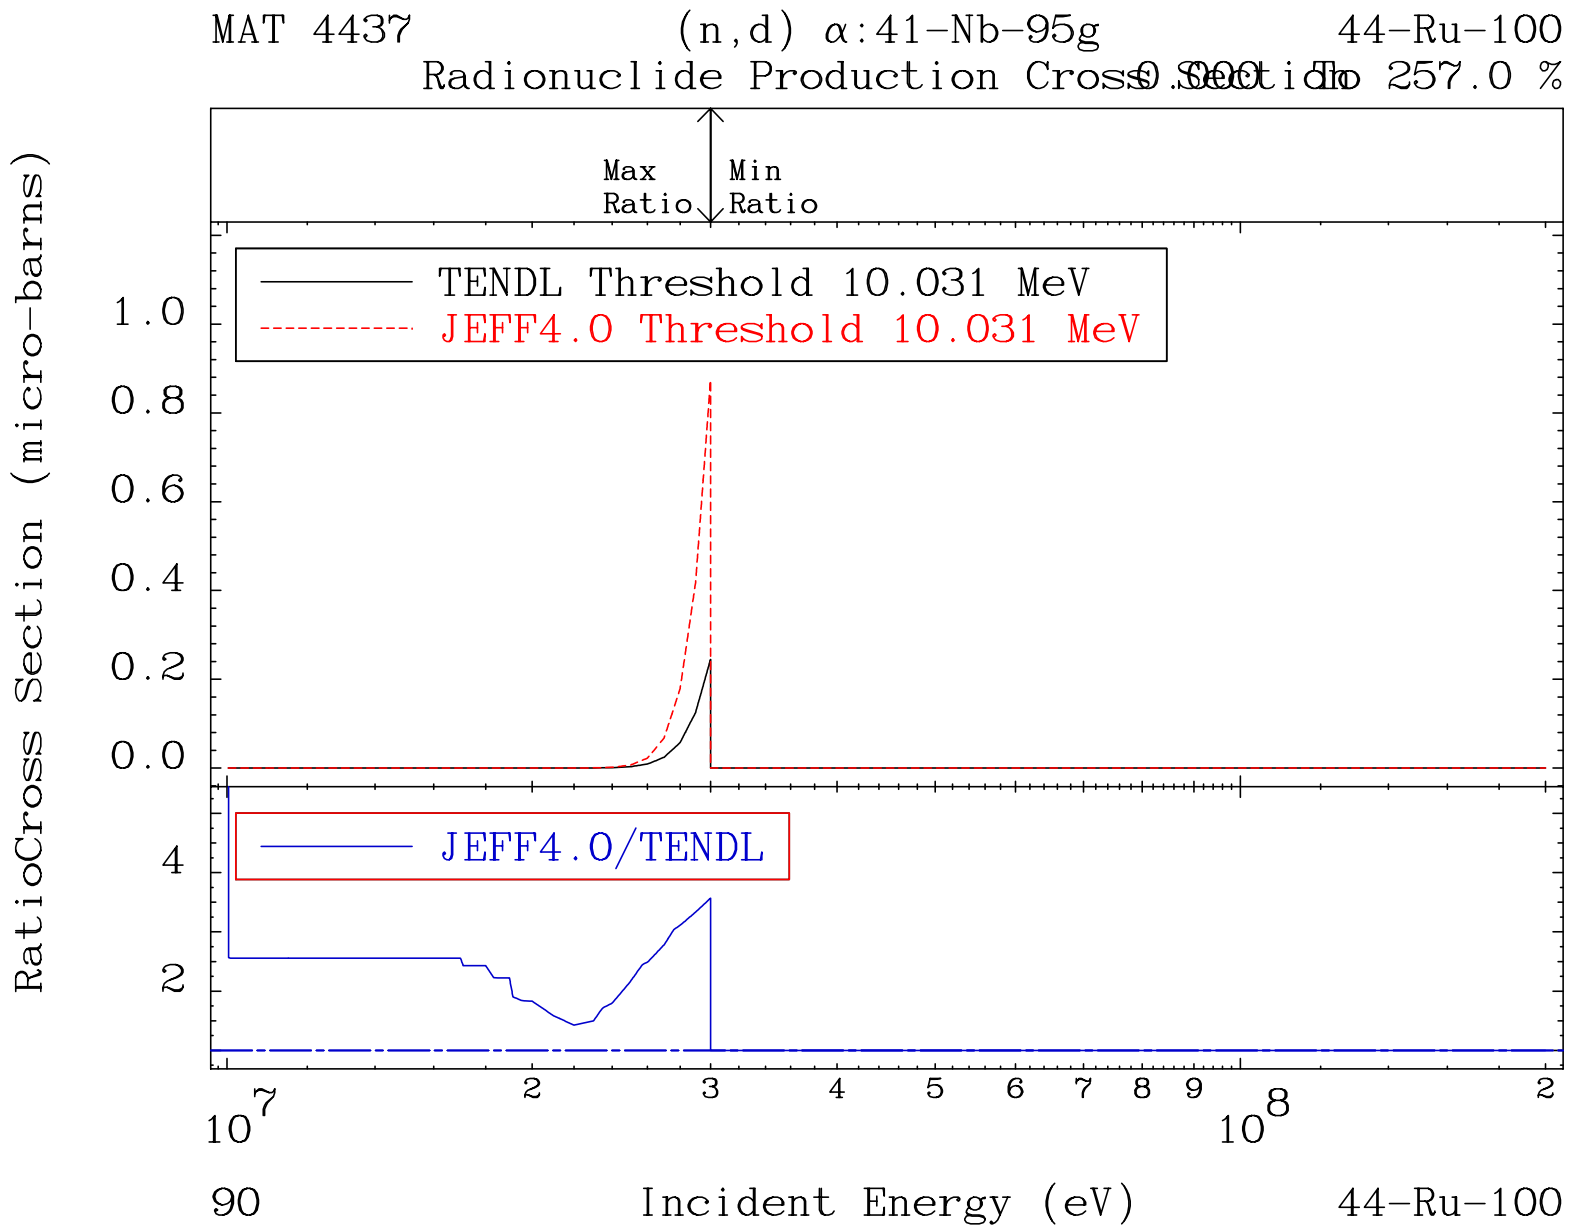
MAT 4437
(n,d) α:41-Nb-95g
44-Ru-100
Radionuclide Production Cross Section
0.000 To 257.0 %
Max Ratio
Min Ratio
TENDL Threshold 10.031 MeV
JEFF4.0 Threshold 10.031 MeV
JEFF4.0/TENDL
RatioCross Section (micro-barns)
1.0
0.8
0.6
0.4
0.2
0.0
4
2
10^7
2
3
4
5
6
7
8
9
10^8
2
90
Incident Energy (eV)
44-Ru-100

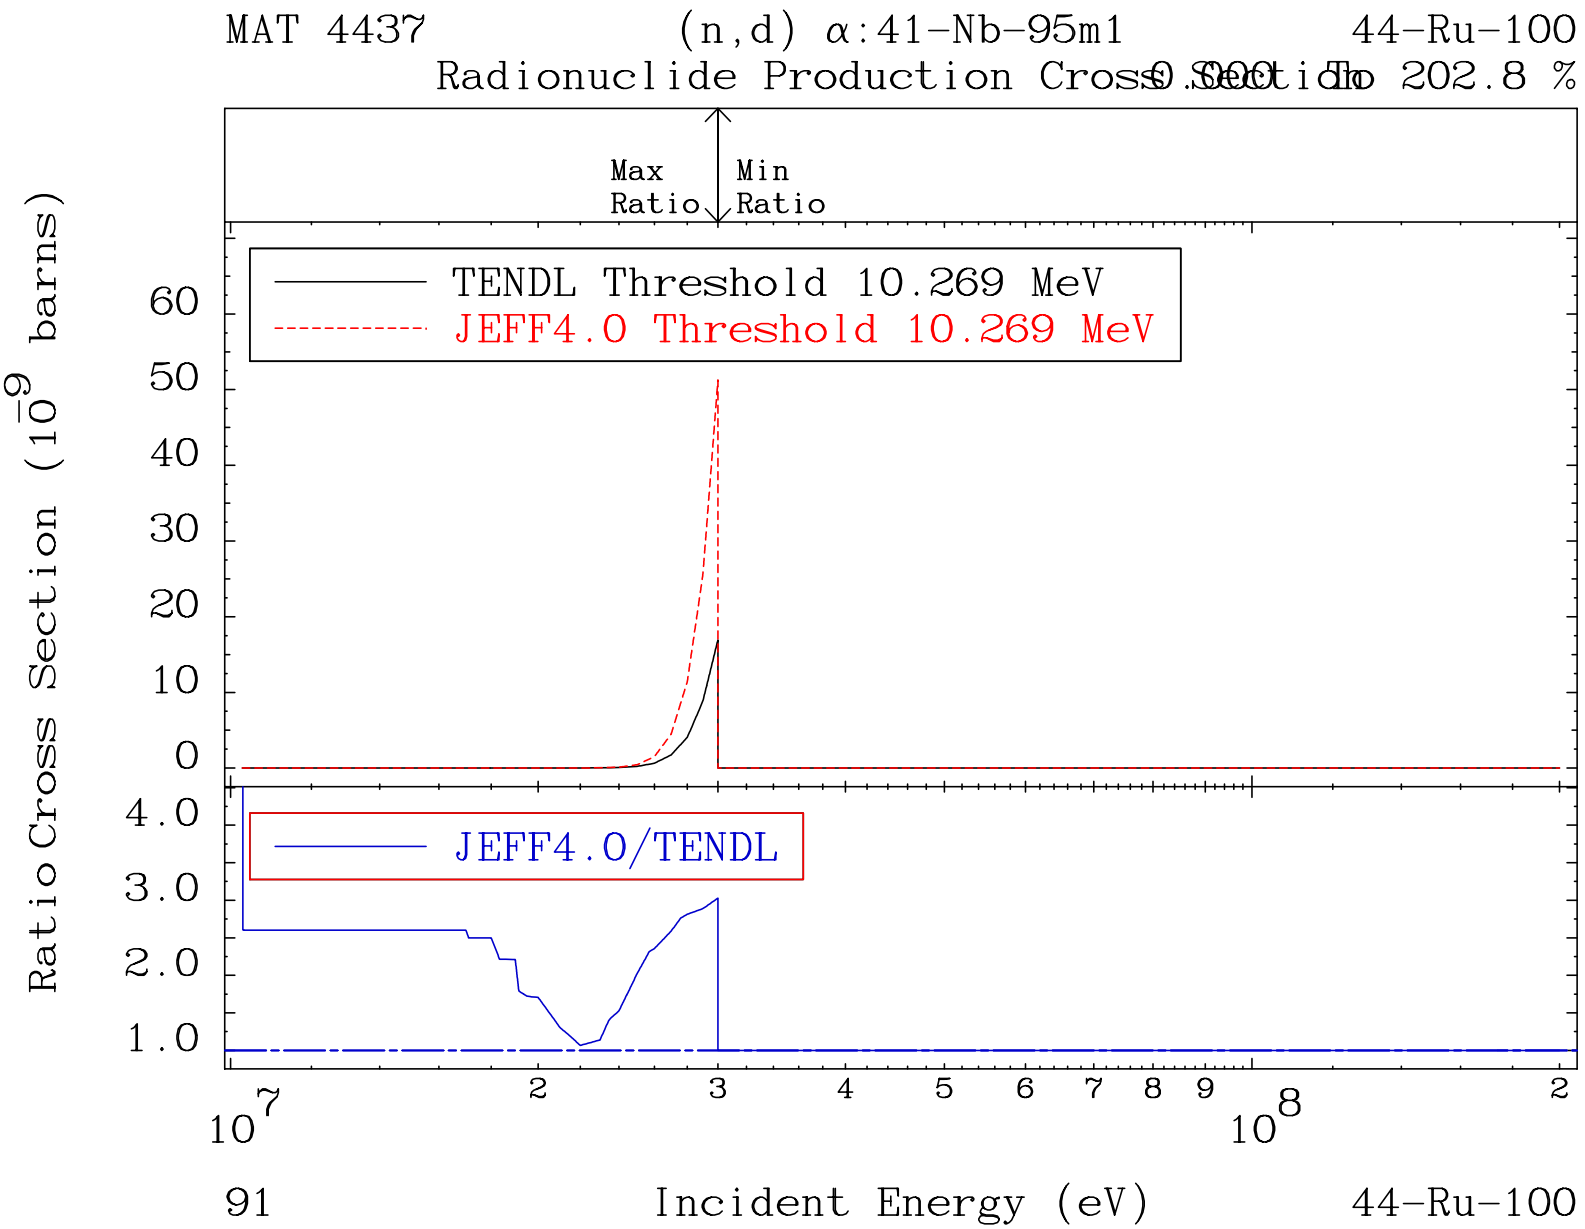
MAT 4437
(n,d) α:41-Nb-95m1
44-Ru-100
Radionuclide Production Cross Section
0.000 To 202.8 %
Max Ratio
Min Ratio
TENDL Threshold 10.269 MeV
JEFF4.0 Threshold 10.269 MeV
JEFF4.0/TENDL
Ratio Cross Section (10^-9 barns)
60
50
40
30
20
10
0
4.0
3.0
2.0
1.0
10^7
2
3
4
5
6
7
8
9
10^8
2
91
Incident Energy (eV)
44-Ru-100